




OIL ANALYSIS REPORT

Sample Rating Trend

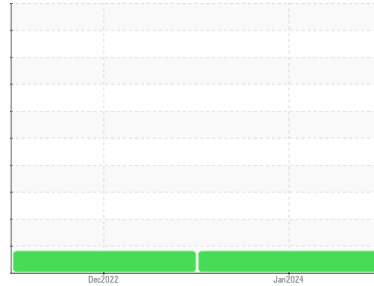

ISO



Area
MOLDING
Machine Id
PANSTONE INJECTION PI-4
Component
Hydraulic System
Fluid
SAFETY-KLEEN PERFORMANCE PLUS AW EX 46 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0792616	WC0691909	---
Sample Date	Client Info	08 Jan 2024	21 Dec 2022	---
Machine Age	hrs	Client Info	0	---
Oil Age	hrs	Client Info	0	---
Oil Changed	Client Info	N/A	N/A	---
Sample Status		ATTENTION	ATTENTION	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	0	<1	---
Chromium	ppm ASTM D5185m >20	0	0	---
Nickel	ppm ASTM D5185m >20	0	0	---
Titanium	ppm ASTM D5185m	0	0	---
Silver	ppm ASTM D5185m	0	0	---
Aluminum	ppm ASTM D5185m >20	0	0	---
Lead	ppm ASTM D5185m >20	0	0	---
Copper	ppm ASTM D5185m >20	7	7	---
Tin	ppm ASTM D5185m >20	0	0	---
Vanadium	ppm ASTM D5185m	0	0	---
Cadmium	ppm ASTM D5185m	0	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	0	0	---
Barium	ppm ASTM D5185m	0	0	---
Molybdenum	ppm ASTM D5185m	0	0	---
Manganese	ppm ASTM D5185m	0	0	---
Magnesium	ppm ASTM D5185m	0	0	---
Calcium	ppm ASTM D5185m	46	49	---
Phosphorus	ppm ASTM D5185m	340	346	---
Zinc	ppm ASTM D5185m	421	427	---
Sulfur	ppm ASTM D5185m	2024	2460	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<1	1	---
Sodium	ppm ASTM D5185m	0	0	---
Potassium	ppm ASTM D5185m >20	0	0	---

FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	10617	8362	---
Particles >6µm	ASTM D7647 >1300	▲ 1354	▲ 1491	---
Particles >14µm	ASTM D7647 >160	46	66	---
Particles >21µm	ASTM D7647 >40	11	14	---
Particles >38µm	ASTM D7647 >10	0	0	---
Particles >71µm	ASTM D7647 >3	0	0	---
Oil Cleanliness	ISO 4406 (c) >--/17/14	▲ 21/18/13	▲ 20/18/13	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	0.19	0.241	---




OIL ANALYSIS REPORT

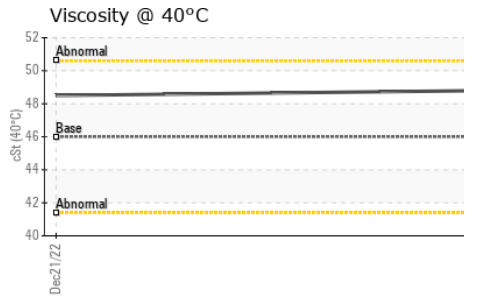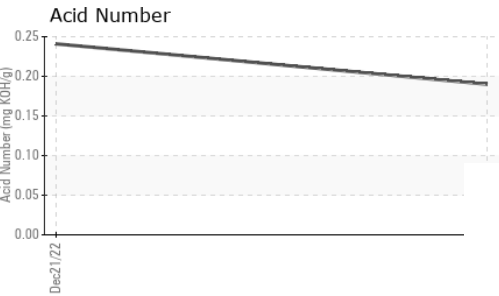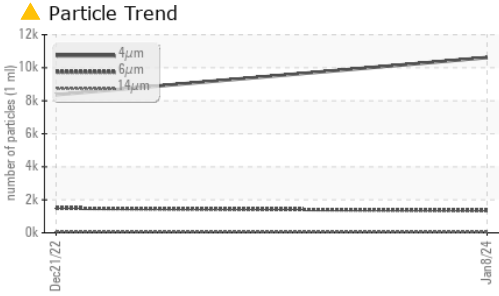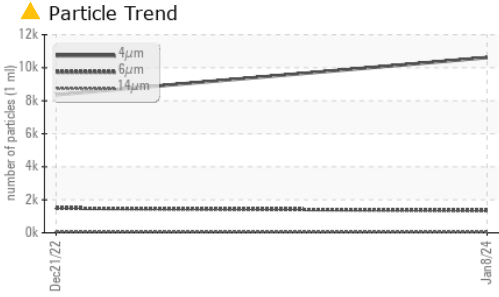






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	48.8	48.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

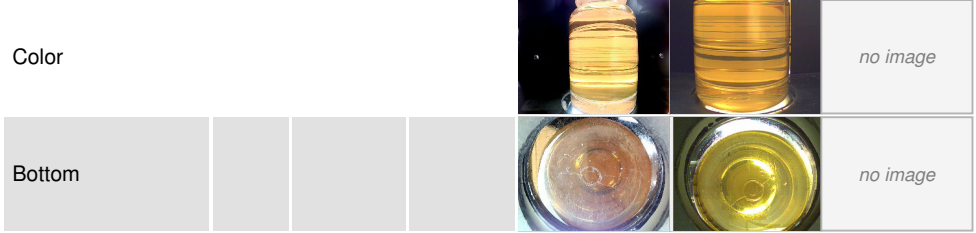

GRAPHS

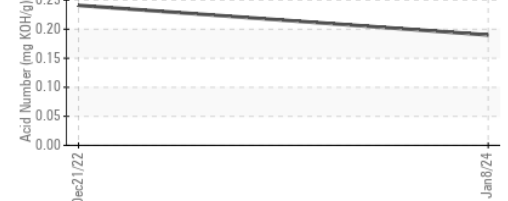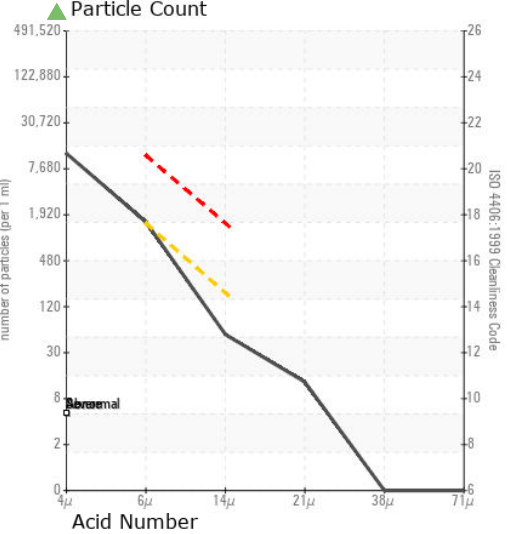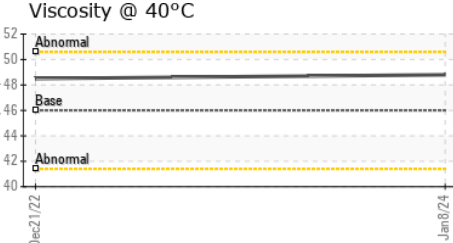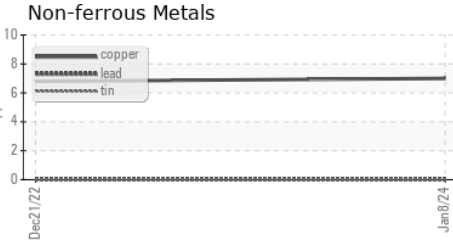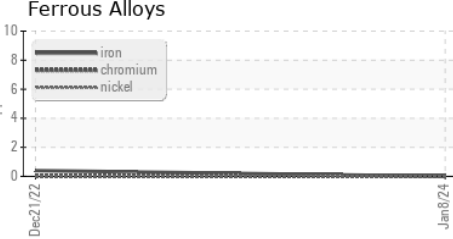

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0792616 Recieved : 12 Jan 2024
 Lab Number : 06059290 Diagnosed : 15 Jan 2024
 Unique Number : 10830672 Diagnostician : Wes Davis
 Test Package : IND 2

ROBINSON RUBBER
 4600 QUEBEC AVE. NORTH
 MINNEAPOLIS, MN
 US 55428
 Contact: DENNIS YOUNG
 dyoung@robinsonrubber.com
 T: (763)535-6737
 F: (763)535-0828

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)