


OIL ANALYSIS REPORT

PALASYN 45
Machine Id
SULLIVAN PALATEK 22AE002811 - GERBER COLLISION

Component

Compressor





DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| SAMPLE INFORM | 4ATION | method | limit/base | current | history1 | history2 |
|------------------|----------|-------------|-------------|-------------|-------------|----------|
| | MATION | | IIIIIIVDase | | | , |
| Sample Number | | Client Info | | UCS06059357 | UCS06059358 | |
| Sample Date | | Client Info | | 17 May 2023 | 14 Feb 2023 | |
| Machine Age | hrs | Client Info | | 2009 | 1262 | |
| Oil Age | hrs | Client Info | | 2009 | 1262 | |
| Oil Changed | | Client Info | | Not Changd | Not Changd | |
| Sample Status | | | | NORMAL | NORMAL | |
| CONTAMINATION | V | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.1 | NEG | NEG | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | 0 | 0 | |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | |
| Nickel | ppm | ASTM D5185m | | 0 | 0 | |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | |
| Silver | ppm | ASTM D5185m | | 0 | 0 | |
| Aluminum | ppm | ASTM D5185m | >25 | 0 | 0 | |
| Lead | ppm | ASTM D5185m | >25 | 0 | 0 | |
| Copper | ppm | ASTM D5185m | >50 | <1 | 0 | |
| Tin | ppm | ASTM D5185m | >15 | 0 | 0 | |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 0.0 | 0 | 0 | |
| Barium | ppm | ASTM D5185m | 0.0 | 0 | 0 | |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | 0 | |
| Manganese | ppm | ASTM D5185m | 0 | 0 | 0 | |
| Magnesium | ppm | ASTM D5185m | 0.0 | 0 | 0 | |
| Calcium | ppm | ASTM D5185m | 0.0 | 0 | 0 | |
| Phosphorus | ppm | ASTM D5185m | 966 | 664 | 671 | |
| Zinc | ppm | ASTM D5185m | 0 | 0 | 0 | |
| Sulfur | ppm | ASTM D5185m | 1309 | 1354 | 1419 | |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | 1 | 2 | |
| Sodium | ppm | ASTM D5185m | | 0 | 0 | |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 0 | |
| FLUID DEGRADA | ATION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.172 | 0.13 | 0.09 | |

Sullivan

OIL ANALYSIS REPORT

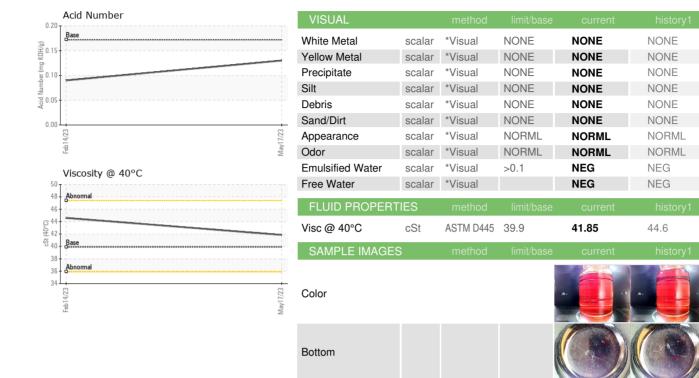

GRAPHS Ferrous Alloys

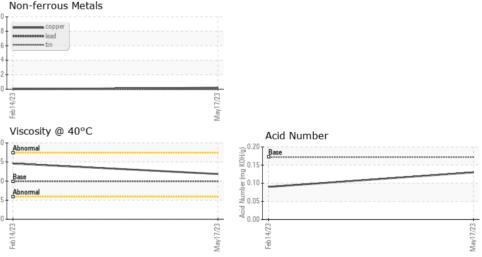





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number** Test Package : IND 2

: UCS06059357 : 06059357 : 10830739

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Recieved : 12 Jan 2024 Diagnosed Diagnostician

: 17 Jan 2024 : Don Baldridge

US 97321 Contact: CRAIG WORLEY service@nwcompressor.com T: (541)752-5366

NORTHWEST COMPRESSOR

29897 HWY 34 SW

ALBANY, OR

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: UCNORALB [WUSCAR] 06059357 (Generated: 01/17/2024 19:33:41) Rev: 1

Contact/Location: CRAIG WORLEY - UCNORALB

F: (541)752-4716

no image

no image