



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**30143**

Component  
**Gasoline Engine**

Fluid  
**KENDALL GT-1 FULL SYNTHETIC MOTOR SAE 5W20 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0867829</b>	---	---
Sample Date	Client Info		<b>05 Jan 2024</b>	---	---
Machine Age	mls	Client Info	<b>168872</b>	---	---
Oil Age	mls	Client Info	<b>6708</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	<b>28</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m >5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >40	<b>3</b>	---	---
Lead	ppm	ASTM D5185m >50	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >155	<b>1</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>18</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>49</b>	---	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>675</b>	---	---
Calcium	ppm	ASTM D5185m	<b>787</b>	---	---
Phosphorus	ppm	ASTM D5185m 770	<b>654</b>	---	---
Zinc	ppm	ASTM D5185m 850	<b>717</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>2328</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>11</b>	---	---
Sodium	ppm	ASTM D5185m >400	<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	---	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.6</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.5</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.9</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.6	<b>3.1</b>	---	---







# OIL ANALYSIS REPORT

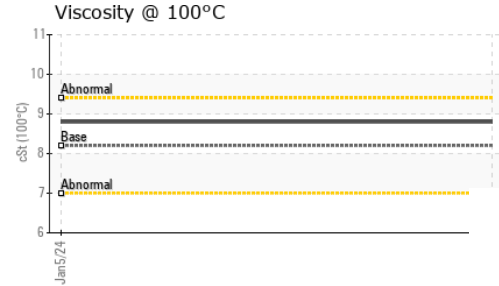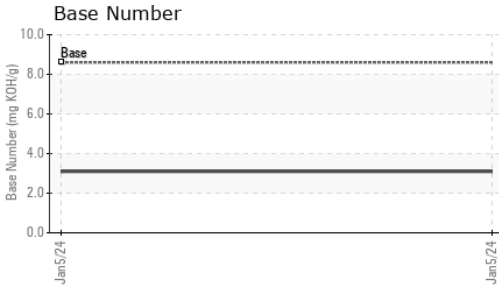

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	8.2	<b>8.8</b>	---	---

## GRAPHS

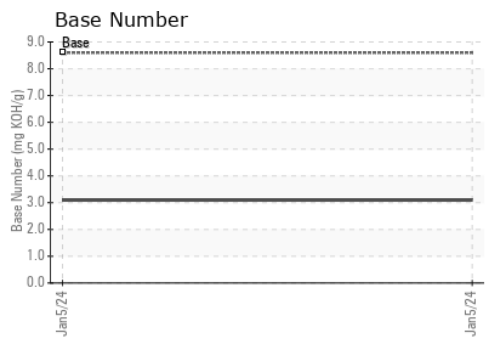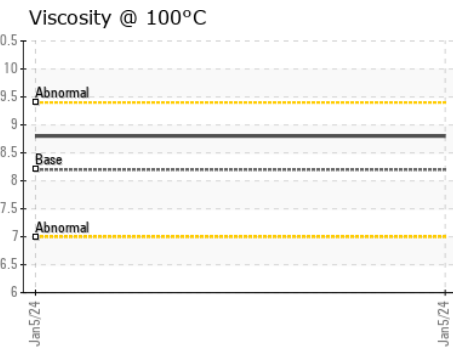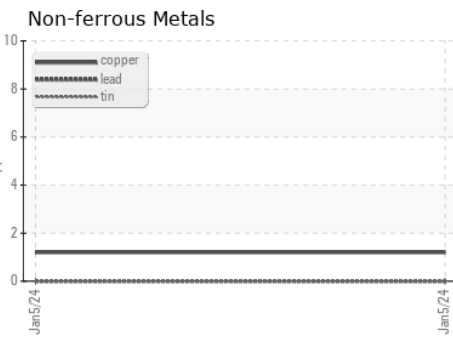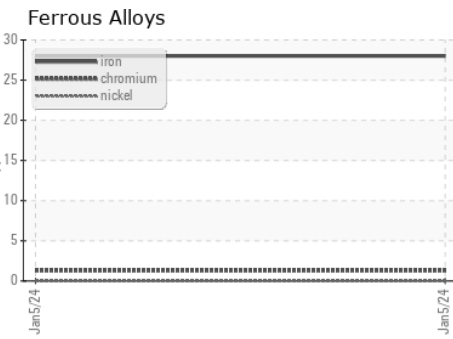

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0867829 **Recieved** : 12 Jan 2024  
**Lab Number** : 06059894 **Diagnosed** : 16 Jan 2024  
**Unique Number** : 10831276 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GREENEVILLE OIL & PETROLEUM INC**  
 860 WEST ANDREW JOHNSON HWY  
 GREENEVILLE, TN  
 US 37745  
 Contact: SHOP  
 shop@burkhardtenterprises.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)