



OIL ANALYSIS REPORT

Sample Rating Trend



DEGRADATION



Machine Id
T1909

Component
Diesel Engine

Fluid
CHEVRON DELO 400 SDE SAE 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

▲ Fluid Condition

The BN level is low. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0829029	---	---
Sample Date	Client Info		08 Jan 2024	---	---
Machine Age	mls	Client Info	367375	---	---
Oil Age	mls	Client Info	30000	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	▲ 138	---	---
Chromium	ppm	ASTM D5185m >20	3	---	---
Nickel	ppm	ASTM D5185m >4	<1	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m >3	0	---	---
Aluminum	ppm	ASTM D5185m >20	10	---	---
Lead	ppm	ASTM D5185m >40	8	---	---
Copper	ppm	ASTM D5185m >330	3	---	---
Tin	ppm	ASTM D5185m >15	<1	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	72	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	158	---	---
Manganese	ppm	ASTM D5185m	2	---	---
Magnesium	ppm	ASTM D5185m	795	---	---
Calcium	ppm	ASTM D5185m	1813	---	---
Phosphorus	ppm	ASTM D5185m 760	839	---	---
Zinc	ppm	ASTM D5185m 800	1027	---	---
Sulfur	ppm	ASTM D5185m 3000	3154	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	13	---	---
Sodium	ppm	ASTM D5185m	2	---	---
Potassium	ppm	ASTM D5185m >20	12	---	---

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.8	---	---
Nitration	Abs/cm	*ASTM D7624 >20	13.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	30.3	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	30.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 10	▲ 3.4	---	---







OIL ANALYSIS REPORT

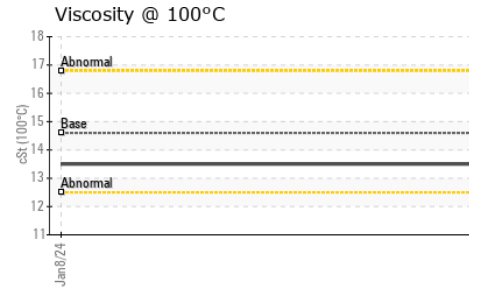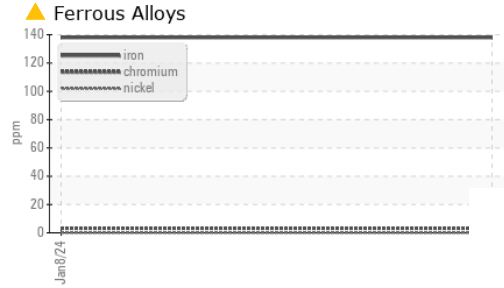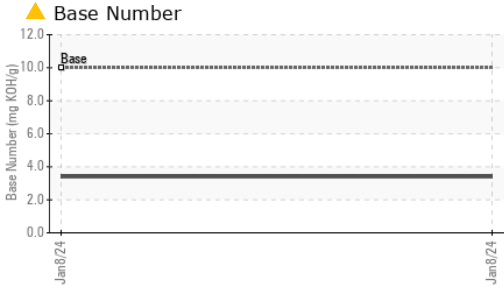

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.6	13.5	---	---

GRAPHS

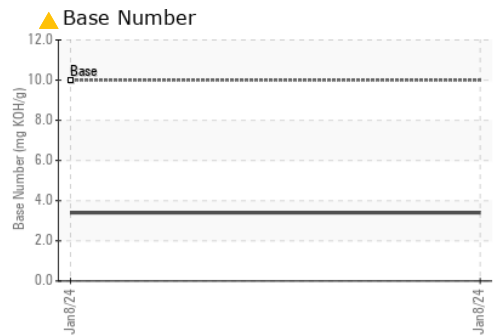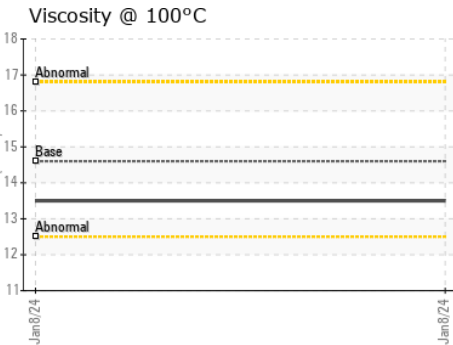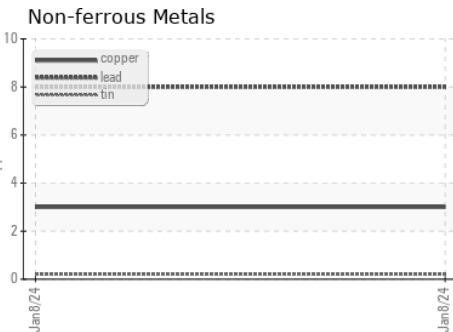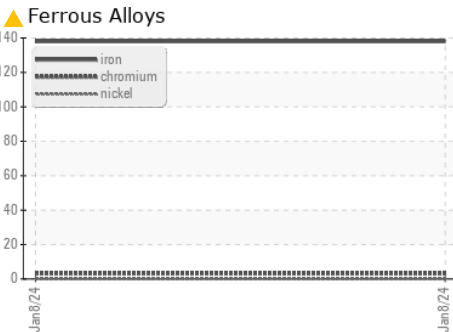

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0829029 **Recieved** : 12 Jan 2024
Lab Number : **06059895** **Diagnosed** : 16 Jan 2024
Unique Number : 10831277 **Diagnostician** : Don Baldrige
Test Package : FLEET

Ergon Trucking Inc. - NEW604
 2567 Congo Arroyo
 Newell, WV
 US 26050
 Contact: Shawn Miles
 shawn.miles@ergon.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)