




OIL ANALYSIS REPORT

Sample Rating Trend

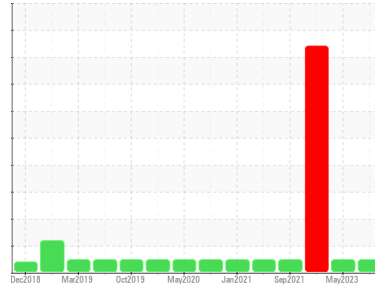

NORMAL



Area
Stoneway Concrete Renton
 Machine Id
[Stoneway Concrete Renton] 10-526

Component
Diesel Engine
 Fluid
CASTROL Vecton LD 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PE0002065	PE0001305	PE12230646
Sample Date	Client Info			22 Dec 2023	04 May 2023	20 Jun 2022
Machine Age	hrs	Client Info		8840	7630	6393
Oil Age	hrs	Client Info		1217	1237	0
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	SEVERE

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	11	12	12
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>4	0	<1	3
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	2	<1	3
Lead	ppm	ASTM D5185m	>40	<1	<1	0
Copper	ppm	ASTM D5185m	>330	25	93	199
Tin	ppm	ASTM D5185m	>15	<1	1	0
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		0	0	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		44	28	19
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		7	56	49
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		92	894	617
Calcium	ppm	ASTM D5185m		2021	1178	950
Phosphorus	ppm	ASTM D5185m		1021	1009	878
Zinc	ppm	ASTM D5185m		1208	1277	994
Sulfur	ppm	ASTM D5185m		3133	3604	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	4	4
Sodium	ppm	ASTM D5185m		3	6	106
Potassium	ppm	ASTM D5185m	>20	3	5	10

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.5	0.5	0.1
Nitration	Abs/cm	*ASTM D7624	>20	9.6	9.7	16
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.7	22.4	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.7	18.8	18
Base Number (BN)	mg KOH/g	ASTM D2896		5.2	6.8	3.93





OIL ANALYSIS REPORT

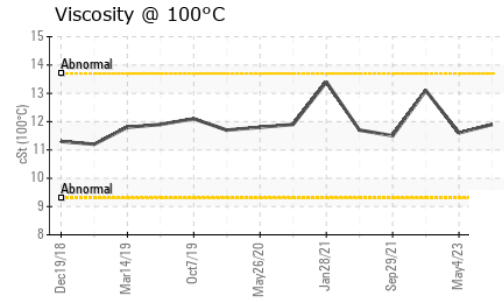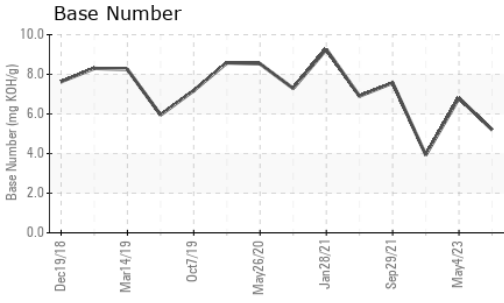

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.9	11.6	13.1

GRAPHS

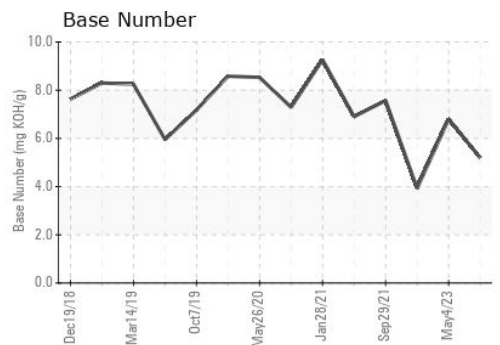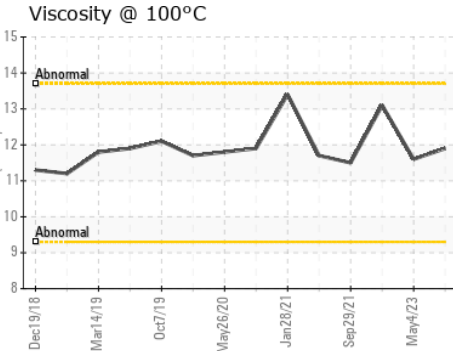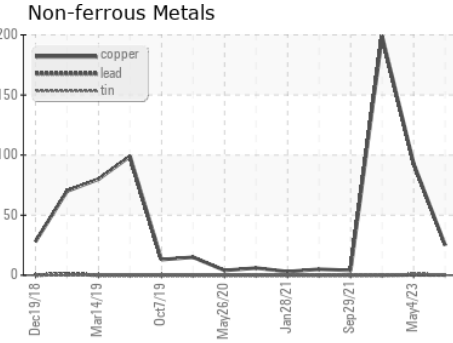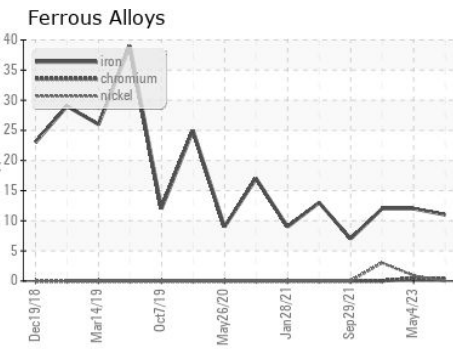

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0002065 **Received** : 12 Jan 2024
Lab Number : **06060117** **Diagnosed** : 16 Jan 2024
Unique Number : 10831499 **Diagnostician** : Doug Bogart
Test Package : CONST (Additional Tests: FT-IR, ICP, KV100, SCREEN, TBN)

Gary Merlino Construction - Off Road Shop
 9125 10TH AVE SOUTH
 SEATTLE, WA
 US 98108
 Contact: Tony
 oilsamples@gmccinc.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: