

OIL ANALYSIS REPORT

Sample Rating Trend



GM Seattle Off Raod Shop [GM Seattle Off Raod Shop] 24-481

Component Hydraulic System

CHEVRON HYDRAULIC OIL AW ISO 46 (--- GAL)





NORMAL

DIAGNOSIS Recommendation Resample at the next service interval to monitor. Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		PE0001013	PE12291649	
Sample Date		Client Info		06 Dec 2023	09 Apr 2020	
Machine Age	hrs	Client Info		2769	2240	
Oil Age	hrs	Client Info		900	373	
Oil Changed		Client Info		Not Changd	Not Changd	
Sample Status				NORMAL	NORMAL	
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		11		
Iron	ppm	ASTM D5185m	>20	3	7	
Chromium	ppm	ASTM D5185m	>10	<1	0	
Nickel	ppm	ASTM D5185m	>10	0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	<1	
Aluminum	ppm	ASTM D5185m	>10	2	1	
Lead	ppm	ASTM D5185m	>10	<1	1	
Copper	ppm	ASTM D5185m	>75	2	4	
Tin	ppm	ASTM D5185m	>10	0	0	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	5	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		0	1	
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		3	8	
Calcium	ppm	ASTM D5185m		78	108	
Phosphorus	ppm	ASTM D5185m		420	394	
Zinc	ppm	ASTM D5185m		474	492	
Sulfur	ppm	ASTM D5185m		1110		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	2	4	
Sodium	ppm	ASTM D5185m		0	0	
Potassium	ppm	ASTM D5185m	>20	<1	0	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	3321		
Particles >6µm		ASTM D7647	>1300	359		
Particles >14µm		ASTM D7647	>160	26		
Particles >21µm		ASTM D7647	>40	8		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/16/12	16/15/12	



OIL ANALYSIS REPORT





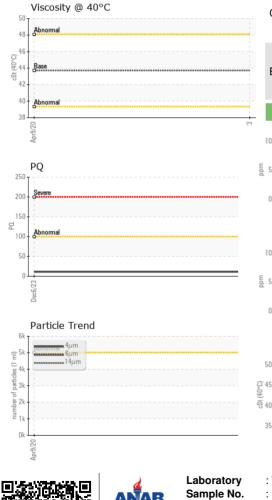

			and the set	11	t	In the term of the	le la transitio
	FLUID DEGRAD	mg KOH/g	method ASTM D8045	limit/base	current	history1 0.62	history2
_		ing Koniy		line it de come			la la tama O
	VISUAL		method	limit/base	current	history1	history2
-	White Metal	scalar	*Visual	NONE	NONE		
	Yellow Metal	scalar	*Visual	NONE	NONE		
	Precipitate	scalar	*Visual *Visual	NONE	NONE		
Dec6/23	Silt Debris	scalar scalar	*Visual	NONE	NONE		
	Sand/Dirt	scalar	*Visual	NONE	NONE		
	Appearance	scalar	*Visual	NORML	NORML		
1	Odor	scalar	*Visual	NORML	NORML		
	Emulsified Water	scalar	*Visual	>0.1	NEG		
	Free Water	scalar	*Visual		NEG		
	FLUID PROPER	ΓIES	method	limit/base	current	history1	history2
	Visc @ 40°C	cSt	ASTM D445	43.7	43.9		
Dec6/23 -	SAMPLE IMAGE	S	method	limit/base	current	history1	history2
ă	Color					no image	no image
	Bottom					no image	no image
	GRAPHS		-				
53	Ferrous Alloys				Particle Count		
	10 iron 1			491,52	T		T26
	E 5- nickel			122,880	0 - Severe		-24
				30,72			-22
				ST = 7,680	Abnormal		-20
	Apr9/20			(per 1 m] 1956			-18
	Non-ferrous Meta	le.		3 10 11 48			-16
	¹⁰ T			of ba		•	
	copper						-14
	ā. 5-			= 31	D -		-12
	0				8-		-10
	, Арг9/20			Dec6/23	2-		-8
	Ap				0. 4μ 6μ	14µ 21µ	38µ 71µ
	Viscosity @ 40°C				Acid Number	14µ 21µ	50µ 11µ
	50 Abnormal			₩0.80			
	유명 45 - Base 			E 0.4			
	청 40 - Abnormal			400 KOH(d) 9.0 kompet 19.0 Vompet 19.0 Vompet 10.0 kompet 10.0 kom	0		
	35			0.0 gci	۰ <u>ل</u>		
	Apr9/20			Dec6/23	Apr9/20		
poratory mple No. o Number que Number st Package	: 06060148	Recieved Diagnose Diagnost Tests: IC	d : 12 . ed : 16 . ician : Dor CP, KV40, P0	Jan 2024 Jan 2024 Baldridge Q, PrtCount,	-	Contact: J	H AVE SOUT SEATTLE, W US 9810 esse Patterso @gmccinc.co

To discuss this sample report, * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

F: