




# OIL ANALYSIS REPORT

Sample Rating Trend

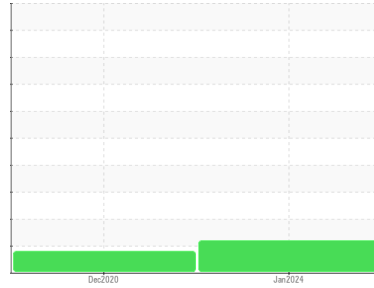

ISO



## Machine Id CHIP SPINNER - PRECISION EDGE

Component  
Hydraulic System

Fluid  
{not provided} (--- Oz)

### DIAGNOSIS

#### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC06060206	WC05149374	---
Sample Date	Client Info		11 Jan 2024	29 Dec 2020	---
Machine Age	hrs	Client Info	0	0	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ABNORMAL	ABNORMAL	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	NEG	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	15	13	---
Chromium	ppm	ASTM D5185m >20	<1	1	---
Nickel	ppm	ASTM D5185m >20	0	<1	---
Titanium	ppm	ASTM D5185m	0	<1	---
Silver	ppm	ASTM D5185m	0	<1	---
Aluminum	ppm	ASTM D5185m >20	2	4	---
Lead	ppm	ASTM D5185m >20	0	<1	---
Copper	ppm	ASTM D5185m >20	<1	2	---
Tin	ppm	ASTM D5185m >20	0	<1	---
Antimony	ppm	ASTM D5185m	---	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	2	---
Barium	ppm	ASTM D5185m	0	2	---
Molybdenum	ppm	ASTM D5185m	0	0	---
Manganese	ppm	ASTM D5185m	2	1	---
Magnesium	ppm	ASTM D5185m	6	7	---
Calcium	ppm	ASTM D5185m	2641	3540	---
Phosphorus	ppm	ASTM D5185m	151	77	---
Zinc	ppm	ASTM D5185m	41	33	---
Sulfur	ppm	ASTM D5185m	13450	12508	---

### CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	6	9	---
Sodium	ppm	ASTM D5185m	9	6	---
Potassium	ppm	ASTM D5185m >20	6	4	---

### FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 78537	▲ 98141	---
Particles >6µm	ASTM D7647	>1300	▲ 14353	▲ 12714	---
Particles >14µm	ASTM D7647	>160	107	115	---
Particles >21µm	ASTM D7647	>40	6	9	---
Particles >38µm	ASTM D7647	>10	0	0	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 23/21/14	▲ 24/21/14	---



# OIL ANALYSIS REPORT

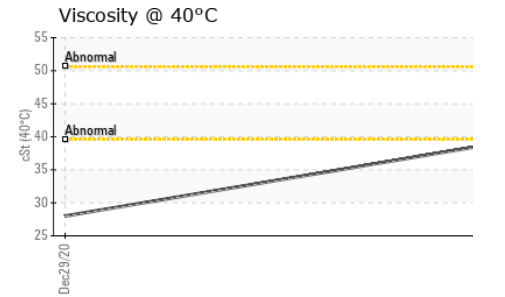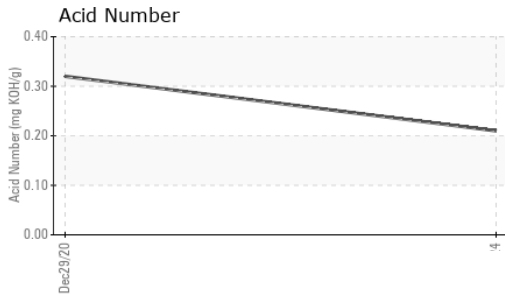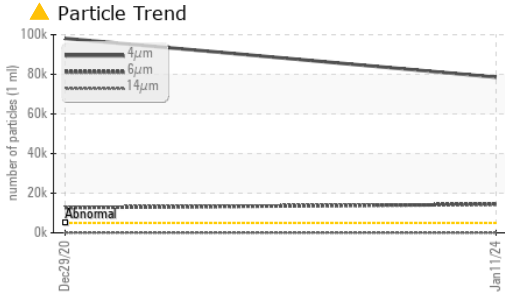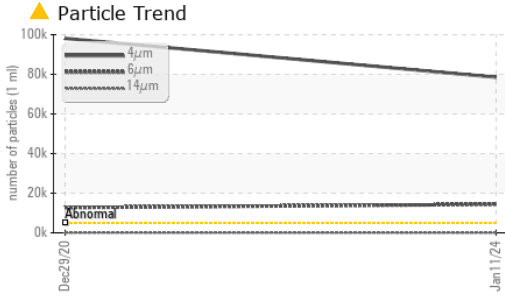


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.21</b>	0.32	---






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		<b>39.0</b>	28.0	---

### SAMPLE IMAGES

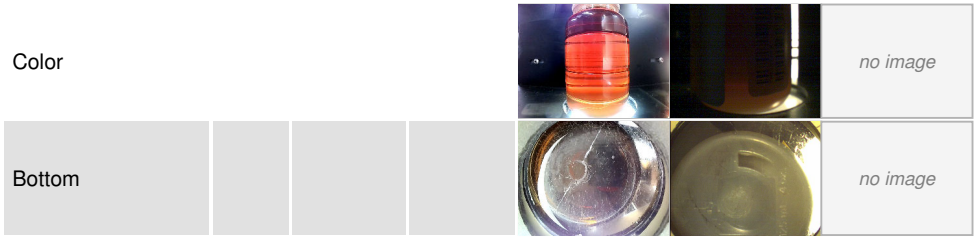

### GRAPHS

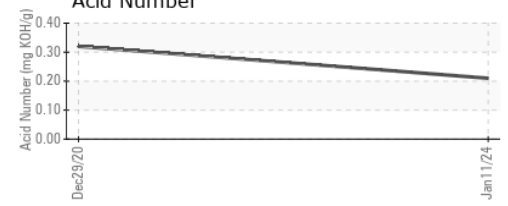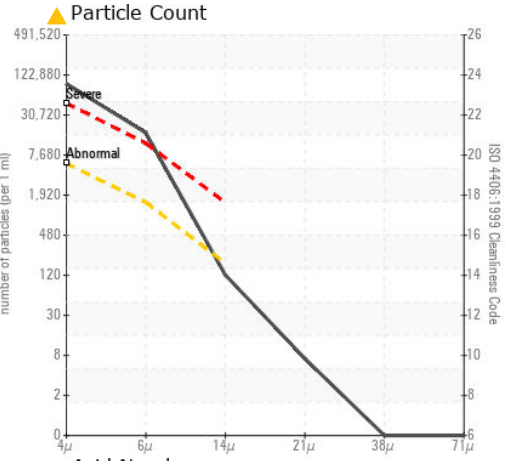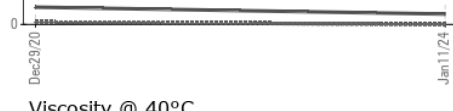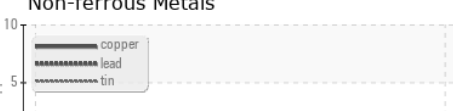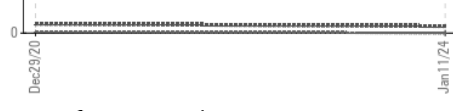

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC06060206      Recieved : 12 Jan 2024  
 Lab Number : 06060206      Diagnosed : 16 Jan 2024  
 Unique Number : 10831588      Diagnostician : Don Baldrige  
 Test Package : IND 2

**BUCKEYE LUBRICANTS**  
 20801 SALISBURY RD  
 BEDFORD, OH  
 US 44146  
 Contact: TOM GARGANTA  
 sales@buckeyelubricants.com  
 T: (216)581-3600  
 F: (216)581-2734

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)