

OIL ANALYSIS REPORT

Sample Rating Trend ISO

7751142 (S/N 1123) Component

Compressor Fluic KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA010670	KCP50118	KCP44391
Sample Date		Client Info		04 Jan 2024	15 Sep 2022	06 Apr 2022
Machine Age	hrs	Client Info		22737	12131	9219
Oil Age	hrs	Client Info		0	3000	3000
Oil Changed	1115	Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
- -		and the state	Part la racia			
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	<1
Chromium	ppm	ASTM D5185m		<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	2	1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m		2	1	1
Tin	ppm	ASTM D5185m	>10	0	0	<1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m	90	40	54	53
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	90	91	75	98
Calcium	ppm	ASTM D5185m	2	4	0	4
Phosphorus	ppm	ASTM D5185m		37	0	10
Zinc	ppm	ASTM D5185m		0	<1	<1
Sulfur	ppm	ASTM D5185m		23313	25056	19340
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	2	2
Sodium	ppm	ASTM D5185m		41	15	34
Potassium	ppm	ASTM D5185m	>20	13	<1	12
Water	%	ASTM D6304	>0.05	0.020	0.033	0.019
ppm Water	ppm	ASTM D6304	>500	201	331.3	194.9
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		11312	11046	
Particles >6µm		ASTM D7647	>1300	<u> </u>	<u> </u>	
Particles >14µm		ASTM D7647	>80	<u> </u>	1 07	
Particles >21µm		ASTM D7647	>20	<u> </u>	8	
Particles >38µm		ASTM D7647	>4	1	1	
Particles >71µm		ASTM D7647	>3	0	1	
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 21/19/15	1 /19/14	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.30	0.40	0.36


Report Id: AMACHAKC [WUSCAR] 06060288 (Generated: 01/16/2024 20:34:48) Rev: 1


Contact/Location: Service Manager - AMACHAKC

-COMPRESSOR Built for a lifetime.


OIL ANALYSIS REPORT

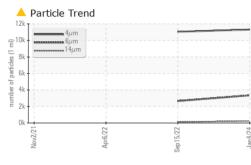

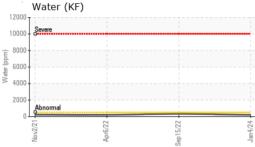


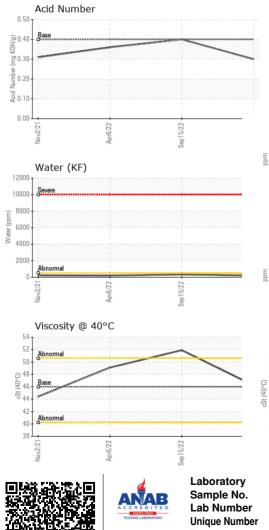

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	46.2	51.9	49.1
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color				0 t		



Bottom

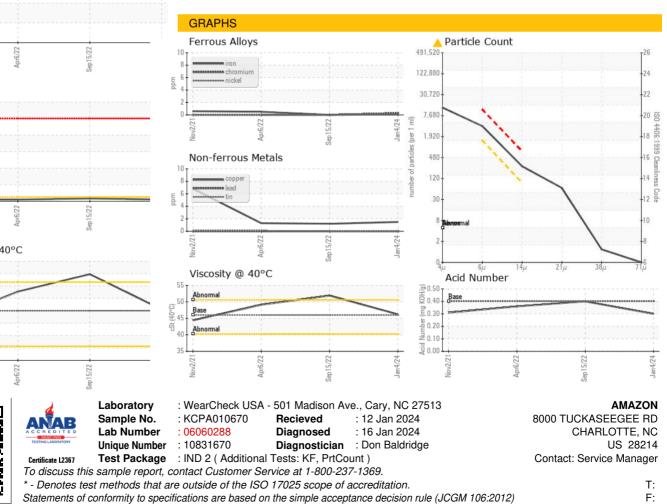

Contact/Location: Service Manager - AMACHAKC