



OIL ANALYSIS REPORT

Sample Rating Trend


WEAR



Machine Id
ACURA 24890-03

Component
Gasoline Engine

Fluid
{not provided} (--- GAL)

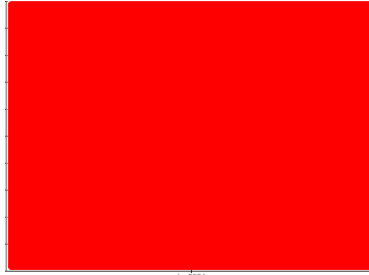

DIAGNOSIS

Recommendation

We advise that you check for the source of water entry. We recommend that you drain the oil from the component if this has not already been done. We advise that you inspect for the source(s) of wear.

Wear

The aluminum level is severe.

Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material. There is a high concentration of water present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WCM2007264	---	---
Sample Date	Client Info		11 Jan 2024	---	---
Machine Age	mls	Client Info	0	---	---
Oil Age	mls	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			SEVERE	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	58	---	---
Chromium	ppm	ASTM D5185m >20	2	---	---
Nickel	ppm	ASTM D5185m >5	3	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m >2	0	---	---
Aluminum	ppm	ASTM D5185m >40	311	---	---
Lead	ppm	ASTM D5185m >50	4	---	---
Copper	ppm	ASTM D5185m >155	24	---	---
Tin	ppm	ASTM D5185m >10	23	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	32	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	94	---	---
Manganese	ppm	ASTM D5185m	7	---	---
Magnesium	ppm	ASTM D5185m	695	---	---
Calcium	ppm	ASTM D5185m	1074	---	---
Phosphorus	ppm	ASTM D5185m	698	---	---
Zinc	ppm	ASTM D5185m	829	---	---
Sulfur	ppm	ASTM D5185m	2782	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	80	---	---
Sodium	ppm	ASTM D5185m >400	5	---	---
Potassium	ppm	ASTM D5185m >20	1	---	---
Fuel	%	ASTM D3524 >4.0	<1.0	---	---
Water	%	ASTM D6304 >0.2	0.925	---	---
ppm Water	ppm	ASTM D6304 >2000	9250	---	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0.1	---	---
Nitration	Abs/cm	*ASTM D7624 >20	15.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	27.2	---	---


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	23.5	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	3.10	---	---




OIL ANALYSIS REPORT


Aluminum (ppm)

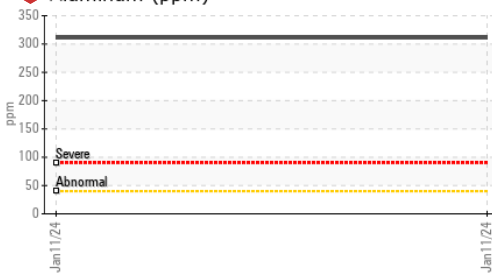


Silicon (ppm)

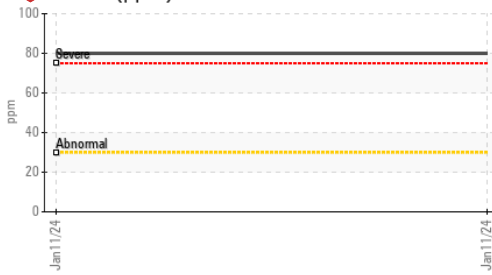


Water (KF)

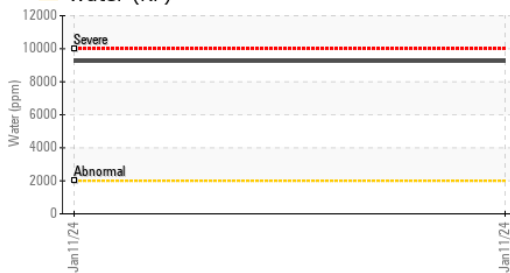

Fuel Dilution

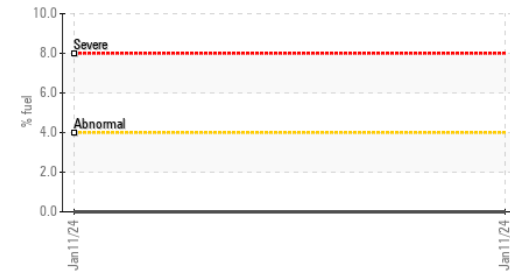

Viscosity @ 40°C

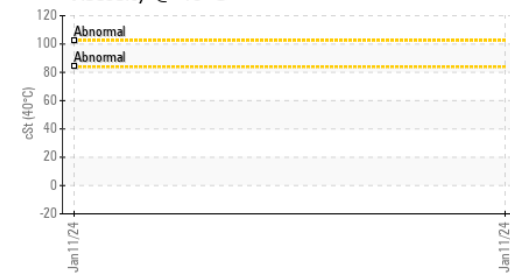


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	▲ MODER	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	8.9	---	---

GRAPHS


Ferrous Alloys

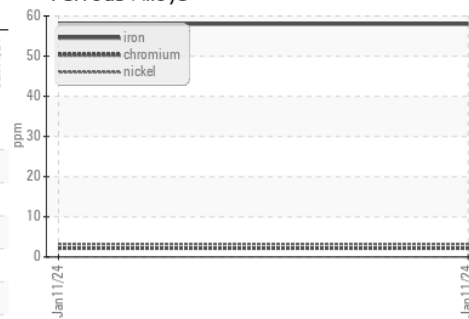


Non-ferrous Metals

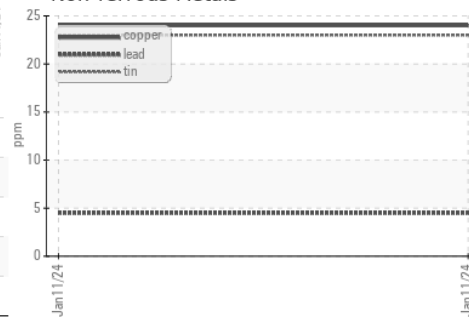

Viscosity @ 100°C

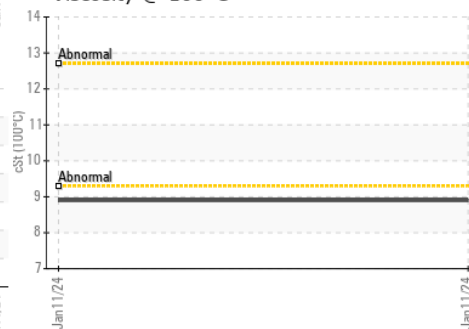

Acid Number

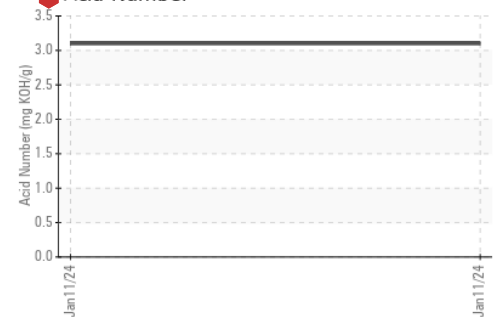

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WCM2007264
 Lab Number : 06060381
 Unique Number : 10831763
 Test Package : MOB 2 (Additional Tests: FuelDilution, KF, KV40, PercentFuel, PrtCou

SOUTHERN AUTOMOTIVE CONSULTING
 P.O. BOX 730
 CREEDMOOR, NC
 US 27522
 Contact: ANDREW MORTON
 andymorton711@yahoo.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: