




OIL ANALYSIS REPORT

Sample Rating Trend

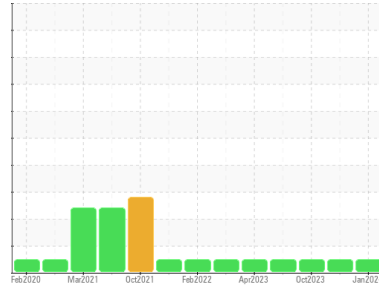

NORMAL



Machine Id
DODGE DODGE DURANGO

Component
Gasoline Engine

Fluid
HIGH PERFORMANCE LUBRICANTS HP SAE 5W20 (7 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Baseline)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		HPL0003564	HPL0003563	HPL0003565
Sample Date	Client Info		09 Jan 2024	01 Jan 2024	28 Oct 2023
Machine Age	mls	Client Info	174236	173300	168000
Oil Age	mls	Client Info	50	34000	28000
Oil Changed	Client Info		N/A	Changed	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	4	33	23
Chromium	ppm	ASTM D5185m >20	0	2	1
Nickel	ppm	ASTM D5185m >5	0	<1	<1
Titanium	ppm	ASTM D5185m	0	<1	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >40	7	12	8
Lead	ppm	ASTM D5185m >50	<1	<1	3
Copper	ppm	ASTM D5185m >155	8	65	64
Tin	ppm	ASTM D5185m >10	<1	<1	<1
Vanadium	ppm	ASTM D5185m	0	<1	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	18	16	1
Barium	ppm	ASTM D5185m	0	0	1
Molybdenum	ppm	ASTM D5185m	579	573	494
Manganese	ppm	ASTM D5185m	<1	2	<1
Magnesium	ppm	ASTM D5185m	1008	1131	998
Calcium	ppm	ASTM D5185m	2532	2637	2340
Phosphorus	ppm	ASTM D5185m	1144	1089	855
Zinc	ppm	ASTM D5185m	1284	1409	1129
Sulfur	ppm	ASTM D5185m	7787	6136	5525

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	13	22	20
Sodium	ppm	ASTM D5185m >400	4	19	16
Potassium	ppm	ASTM D5185m >20	<1	3	4

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0.1	0.1	0
Nitration	Abs/cm	*ASTM D7624 >20	9.2	22.8	22.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	38.5	62.0	60.5


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	39.3	66.8	64.1
Base Number (BN)	mg KOH/g	ASTM D2896	15.03	7.76	6.08




OIL ANALYSIS REPORT


Acid Number

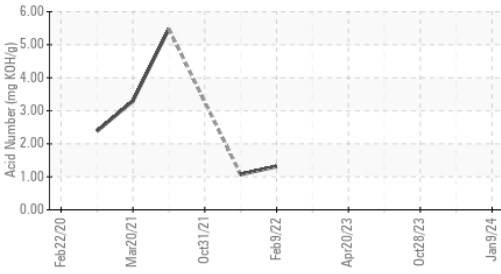

Acid Number

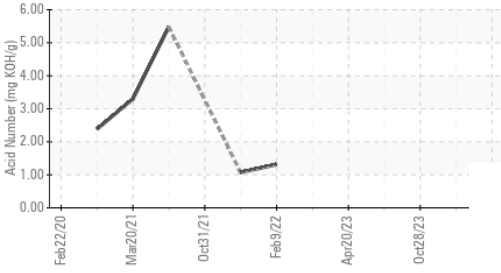









Viscosity @ 100°C

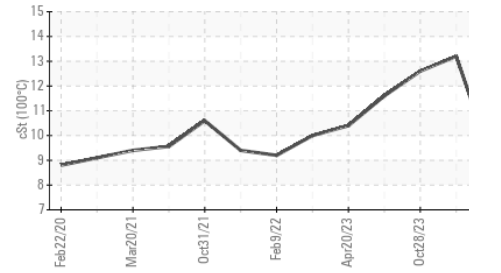

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	9	13.2	12.6

GRAPHS

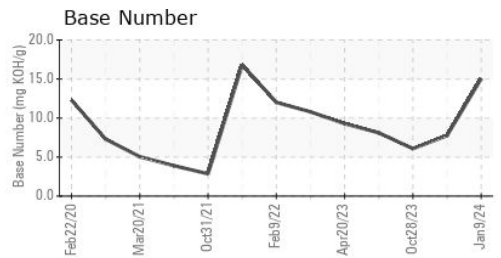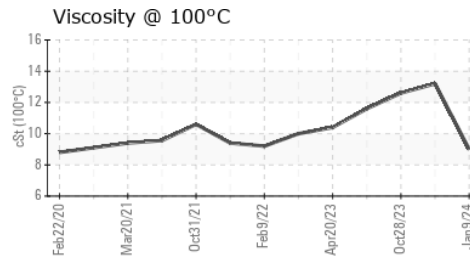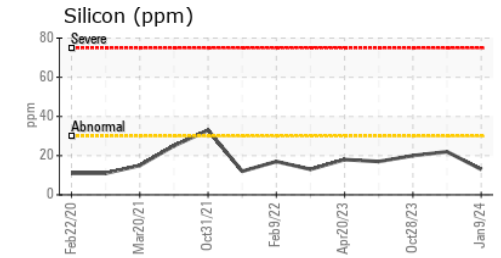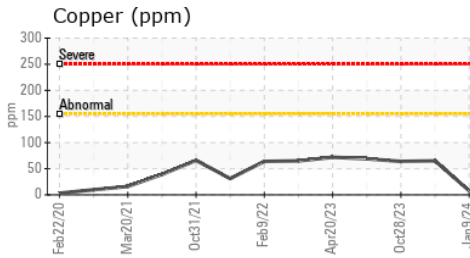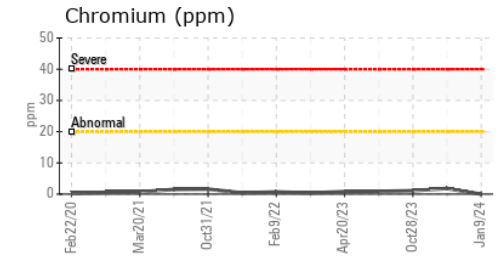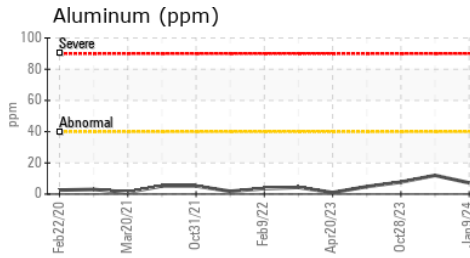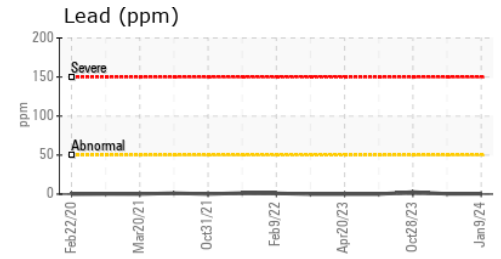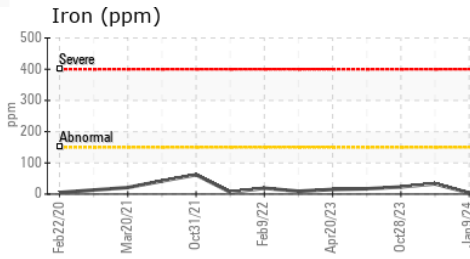

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HPL0003564 **Recieved** : 12 Jan 2024
Lab Number : 06060384 **Diagnosed** : 18 Jan 2024
Unique Number : 10831766 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: TBN)

WAYNE WILLSON
 2100 STONECREST DRIVE
 FORT COLLINS, CO
 US 80521
 Contact: WAYNE WILLSON
 wayne.willson@gmail.com
 T: (630)399-0850
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)