

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

TAKEUCHI TB240 124006792

Component Hydraulic System Fluid

AW HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 6 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Jan 2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		ML0000483		
Sample Date		Client Info		05 Jan 2024		
Machine Age	hrs	Client Info		172		
Oil Age	hrs	Client Info		172		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	2		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>75	1		
Tin		ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m	>10	0		
	ppm			-		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	<1		
Barium	ppm	ASTM D5185m	5	0		
Molybdenum	ppm	ASTM D5185m	5	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	25	0		
Calcium	ppm	ASTM D5185m	200	70		
Phosphorus	ppm	ASTM D5185m	300	273		
Zinc	ppm	ASTM D5185m	370	62		
Sulfur	ppm	ASTM D5185m	2500	359		
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	2		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	A 12452		
Particles >6µm		ASTM D7647	>1300	753		
Particles >14µm		ASTM D7647	>160	11		
Particles >21µm		ASTM D7647	>40	3		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	A 21/17/11		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.16		
			0.01	0.10		

Report Id: VOLVO8882 [WUSCAR] 06060980 (Generated: 01/24/2024 10:19:16) Rev: 1

Contact/Location: KYLE RATLIFFE - VOLVO8882



Acid Number

1.00

Ĕ

OIL ANALYSIS REPORT

method


limit/base


current


history1

history2

VISUAL

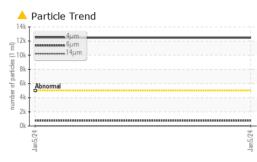

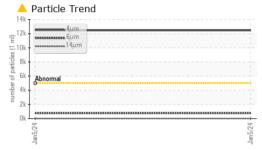

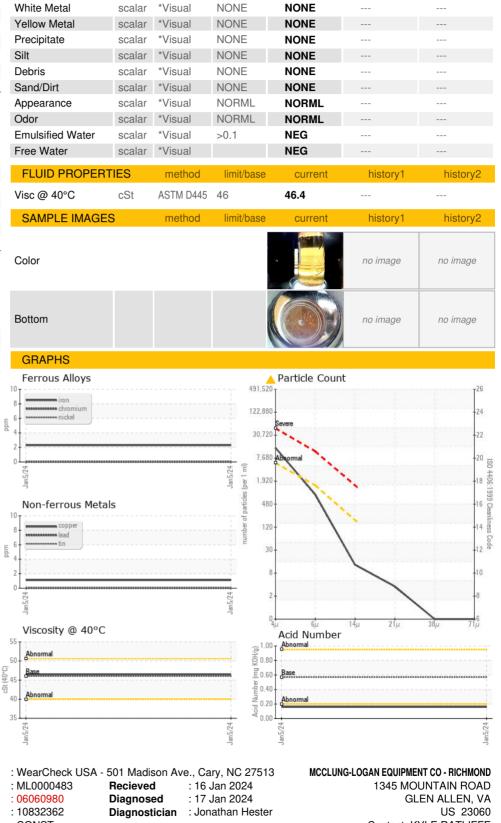

0.8 Ê0.60 Ê n 40 Pig 0.2 0.00 Viscosity @ 40°C 52 50 48 75 44 47 Ab 40 38 Jan5/74



Contact: KYLE RATLIFFE To discuss this sample report, contact Customer Service at 1-800-237-1369. KRATLIFFE@MCCLUNG-LOGAN.COM * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (804)266-1611

Contact/Location: KYLE RATLIFFE - VOLVO8882

T: