

OIL ANALYSIS REPORT

GP-212 B60752 - PUMP VACUUM BUSCH RA 1000 SOMME 3 (S/N C1523000447) Component

Pump Fluid

PETRO CANADA PURITY FG EP GEAR FLUID 100 (5 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





Sample Rating Trend


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0880582	WC0855971	WC0842484
Sample Date		Client Info		06 Jan 2024	22 Nov 2023	12 Sep 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>.1	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	8	8	0
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>7	0	1	3
Lead	ppm	ASTM D5185m	>12	0	0	0
Copper	ppm	ASTM D5185m	>30	0	0	0
Tin	ppm	ASTM D5185m	>9	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	<1	<1
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		257	295	399
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		982	1062	1537
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>60	1	3	<1
Sodium	ppm	ASTM D5185m		3	0	2
Potassium	ppm	ASTM D5185m	>20	0	2	0
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	1100	607	161
Particles >6µm		ASTM D7647	>2500	266	173	64
Particles >14µm		ASTM D7647	>320	19	9	13
Particles >21µm		ASTM D7647	>80	5	2	4
Particles >38µm		ASTM D7647	>20	1	0	1
Particles >71µm		ASTM D7647		0	0	1
Oil Cleanliness		ISO 4406 (c)	>20/18/15	17/15/11	16/15/10	15/13/11
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	.44	0.06	0.139	0.047
·57·26) Pov: 1				0	option: DVANUC	


Report Id: HORAUS [WUSCAR] 06061007 (Generated: 01/18/2024 08:57:26) Rev: 1


Contact/Location: RYAN LOWE - HORAUS




OIL ANALYSIS REPORT










VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	103.2	95.6	94.0	91.0
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					•	
Bottom						

Bottom

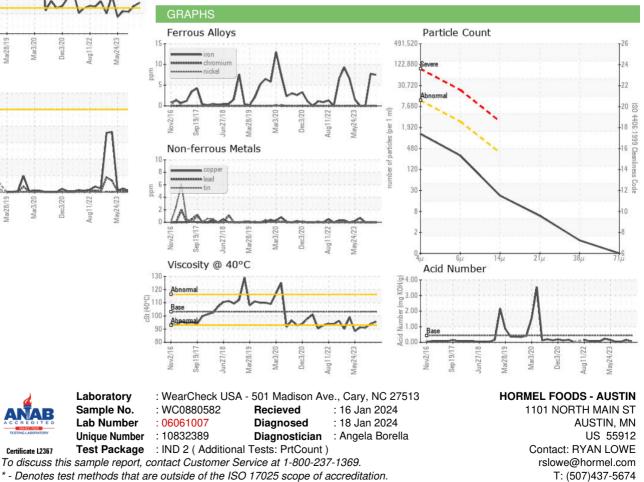

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

F: (507)437-9805