



OIL ANALYSIS REPORT

Sample Rating Trend

ISO



Machine Id


5

Component

Hydraulic System

Fluid

WEBER HYDRAULIC 46 (--- GAL)

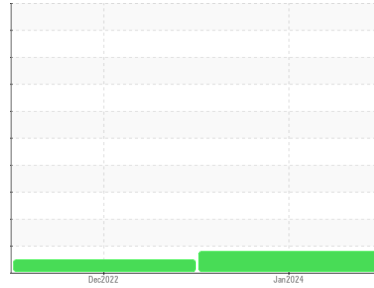

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0650956	WC0650948	---
Sample Date	Client Info	09 Jan 2024	20 Dec 2022	---
Machine Age	hrs	Client Info	0	3605
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	Not Chngd	N/A	---
Sample Status		ATTENTION	NORMAL	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	13	11
Chromium	ppm	ASTM D5185m	>10	0	<1
Nickel	ppm	ASTM D5185m	>10	0	0
Titanium	ppm	ASTM D5185m		0	0
Silver	ppm	ASTM D5185m		0	0
Aluminum	ppm	ASTM D5185m	>10	0	0
Lead	ppm	ASTM D5185m	>10	0	<1
Copper	ppm	ASTM D5185m	>75	4	5
Tin	ppm	ASTM D5185m	>10	0	0
Vanadium	ppm	ASTM D5185m		0	0
Cadmium	ppm	ASTM D5185m		0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	<1
Barium	ppm	ASTM D5185m		0	0
Molybdenum	ppm	ASTM D5185m		0	<1
Manganese	ppm	ASTM D5185m		<1	<1
Magnesium	ppm	ASTM D5185m		12	25
Calcium	ppm	ASTM D5185m		28	41
Phosphorus	ppm	ASTM D5185m		428	397
Zinc	ppm	ASTM D5185m		451	453
Sulfur	ppm	ASTM D5185m		2461	2774

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>20	<1	2
Sodium	ppm	ASTM D5185m		<1	0
Potassium	ppm	ASTM D5185m	>20	0	<1

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 6938	1644
Particles >6µm	ASTM D7647	>1300	660	495
Particles >14µm	ASTM D7647	>160	20	30
Particles >21µm	ASTM D7647	>40	5	5
Particles >38µm	ASTM D7647	>10	0	0
Particles >71µm	ASTM D7647	>3	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 20/17/11	18/16/12


FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045		0.52	0.56




OIL ANALYSIS REPORT


Particle Trend

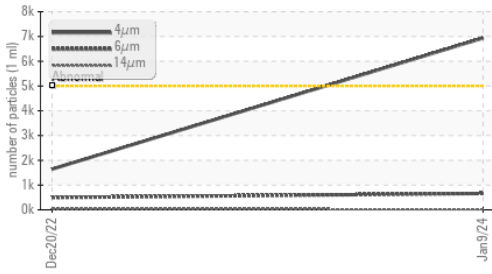


Particle Trend

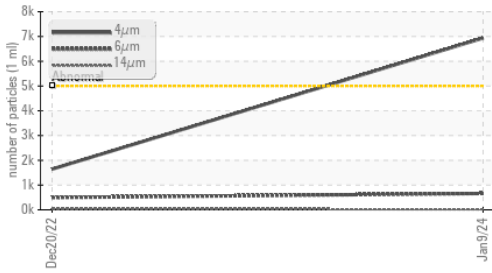

Acid Number

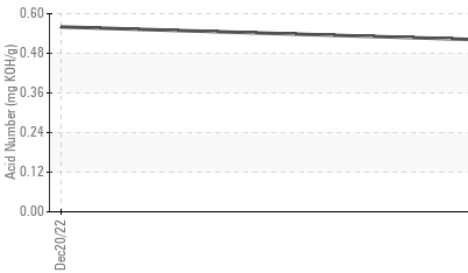


Viscosity @ 40°C

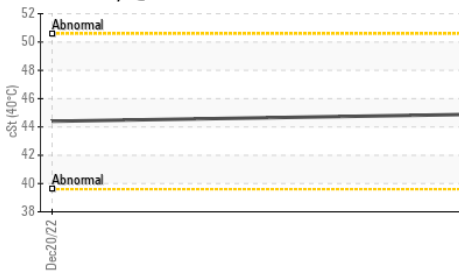


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	44.9	44.4	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

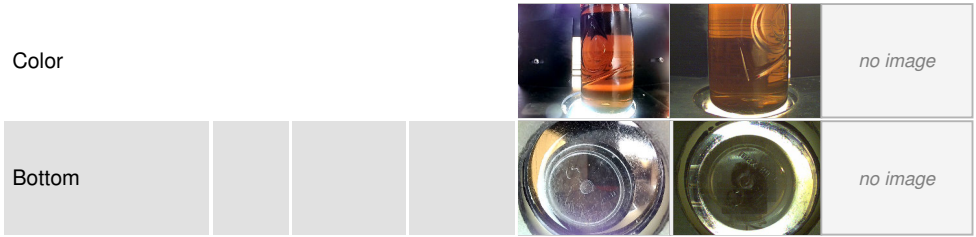

GRAPHS

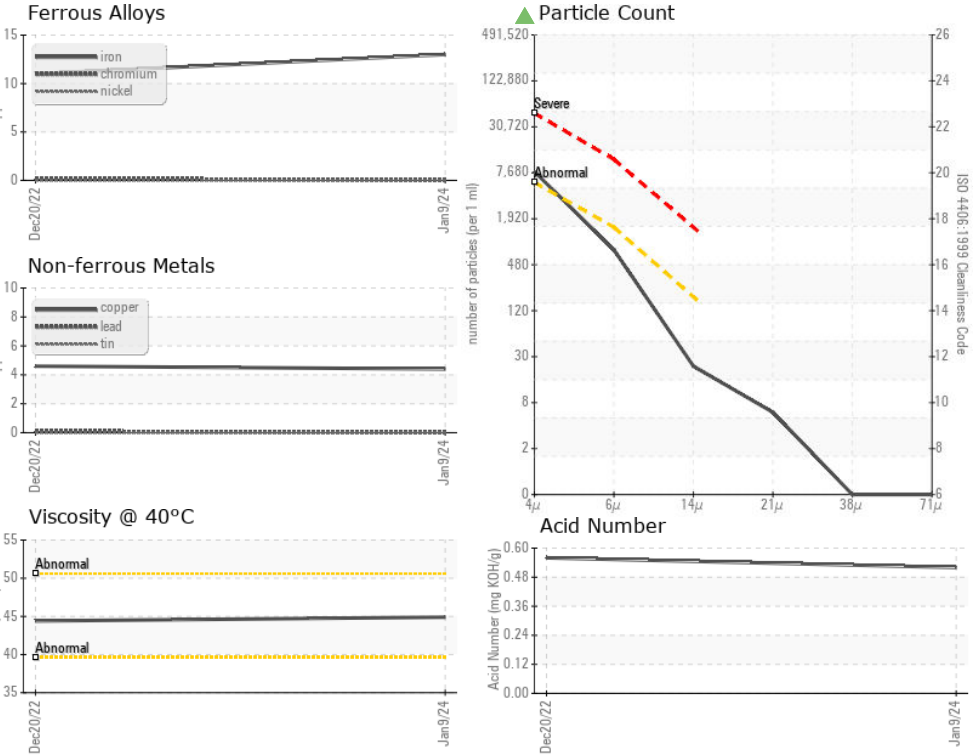

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0650956 Recieved : 16 Jan 2024
 Lab Number : 06061009 Diagnosed : 17 Jan 2024
 Unique Number : 10832391 Diagnostician : Wes Davis
 Test Package : MOB 2

DENVILLE LINE PAINTING
 501 FORD RD
 ROCKAWAY, NJ
 US 07866
 Contact: DAVID ORR
 DAVIDORR59@GMAIL.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: