


OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id 56 Component **Hydraulic System**

WEBER HYDRAULIC 46 (--- GAL)

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Dec2022	Jan 2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0650957	WC0650949	
Sample Date		Client Info		09 Jan 2024	20 Dec 2022	
Machine Age	hrs	Client Info		0	3243	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		Not Changd	N/A	
Sample Status				ATTENTION	NORMAL	
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	6	5	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>10	0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>10	0	0	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m	>75	2	1	
Tin	ppm	ASTM D5185m	>10	0	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		0	<1	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m		0	3	
Calcium	ppm	ASTM D5185m		33	47	
Phosphorus	ppm	ASTM D5185m		390	363	
Zinc	ppm	ASTM D5185m		465	453	
Sulfur	ppm	ASTM D5185m		2883	2947	
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<1	2	
Sodium	ppm	ASTM D5185m		1	0	
Potassium	ppm	ASTM D5185m	>20	0	<1	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	▲ 5694	1173	
Particles >6µm		ASTM D7647	>1300	1029	406	
Particles >14µm		ASTM D7647	>160	41	47	
Particles >21µm		ASTM D7647	>40	10	10	
Particles >38µm		ASTM D7647	>10	0	1	
Particles >71μm		ASTM D7647	>3	0	1	
Oil Cleanliness		ISO 4406 (c)	>19/17/14	2 0/17/13	17/16/13	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.54	0.55	



OIL ANALYSIS REPORT

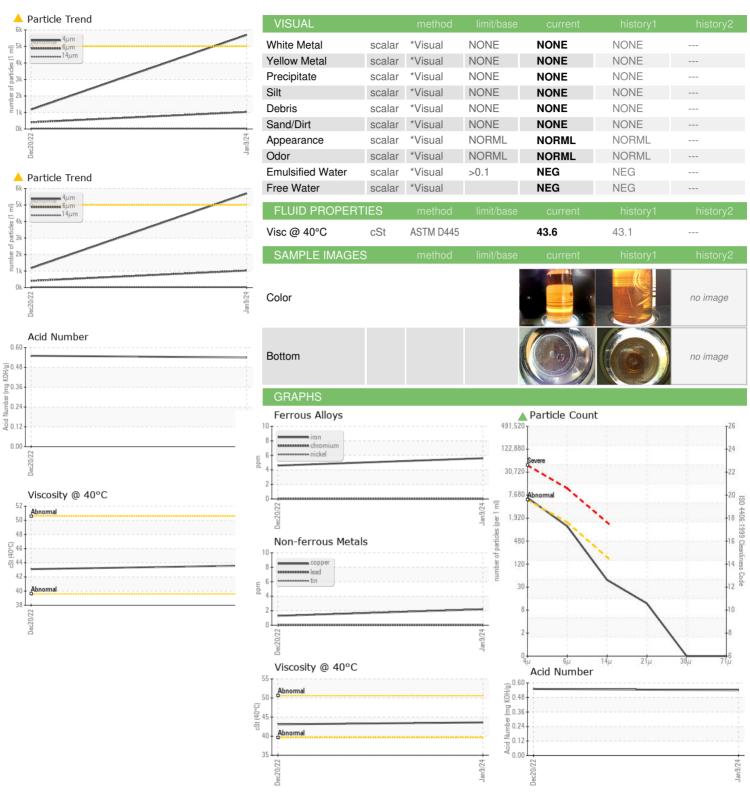





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: WC0650957 : 06061010 : 10832392 Test Package : MOB 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 16 Jan 2024 Recieved Diagnosed Diagnostician

: 17 Jan 2024 : Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

DENVILLE LINE PAINTING

501 FORD RD ROCKAWAY, NJ US 07866

Contact: DAVID ORR

DAVIDORR59@GMAIL.COM

T: F: