


OIL ANALYSIS REPORT

Sample Rating Trend

ISO



Machine Id
CATERPILLAR 980H LOADER 6583 (S/N JMS05055)
Component
Hydraulic System
Fluid
TULCO LUBSOIL SUPER HYDRAULIC HZ 46 (--- GAL)

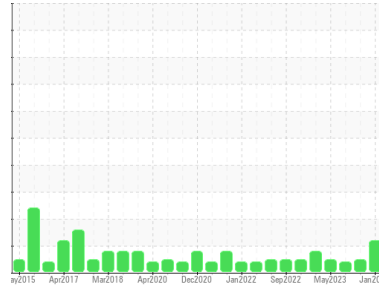

DIAGNOSIS

Recommendation
The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		TO10003077	TO10002752	TO10002310
Sample Date	Client Info		08 Jan 2024	02 Oct 2023	14 Jul 2023
Machine Age	hrs	Client Info	34718	34179	33615
Oil Age	hrs	Client Info	5126	4587	4023
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			ABNORMAL	NORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	7	8	10
Chromium	ppm	ASTM D5185m >10	0	0	<1
Nickel	ppm	ASTM D5185m >10	0	0	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >10	1	0	2
Lead	ppm	ASTM D5185m >10	0	0	0
Copper	ppm	ASTM D5185m >75	1	2	1
Tin	ppm	ASTM D5185m >10	0	0	0
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m	153	140	140
Calcium	ppm	ASTM D5185m	189	191	204
Phosphorus	ppm	ASTM D5185m	648	562	597
Zinc	ppm	ASTM D5185m	788	718	741
Sulfur	ppm	ASTM D5185m	2416	2331	2816

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	7	4	7
Sodium	ppm	ASTM D5185m	3	3	2
Potassium	ppm	ASTM D5185m >20	0	2	<1
Water	%	ASTM D6304 >0.1	NEG	NEG	NEG

FLUID CLEANLINESS


	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 114412	4184	---
Particles >6µm	ASTM D7647	>1300	▲ 15919	220	---
Particles >14µm	ASTM D7647	>160	11	27	---
Particles >21µm	ASTM D7647	>40	3	9	---
Particles >38µm	ASTM D7647	>10	1	0	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 24/21/11	19/15/12	---

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.81	0.71	0.72

OIL ANALYSIS REPORT


▲ Particle Trend

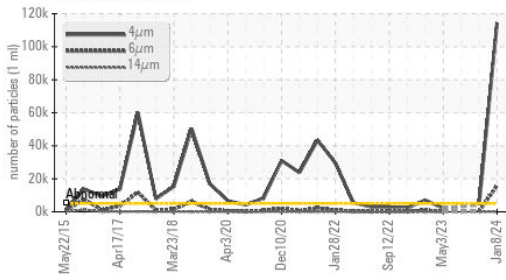


Viscosity @ 100°C

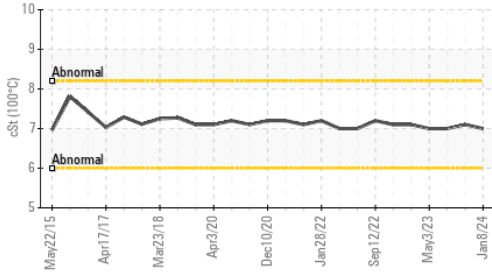


Water (KF)

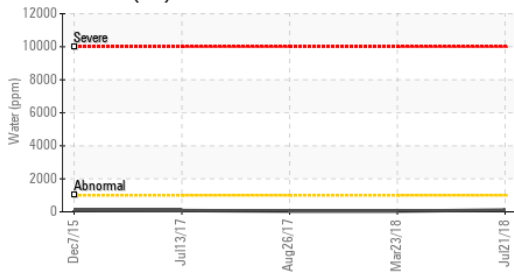

Viscosity @ 100°C

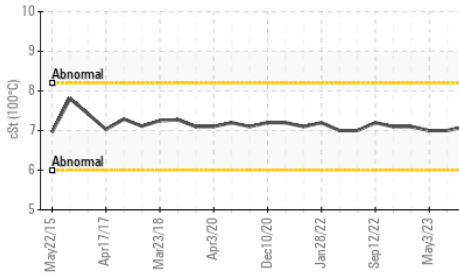

Viscosity @ 40°C

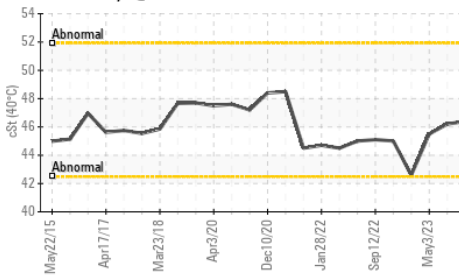


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.9	46.4	46.2
Visc @ 100°C	cSt	ASTM D445	7	7.1	7
Viscosity Index (VI)	Scale	ASTM D2270	105	111	108

SAMPLE IMAGES


Color

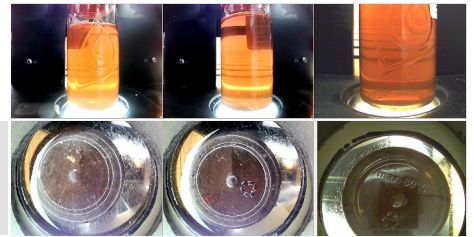


Bottom

GRAPHS


Ferrous Alloys

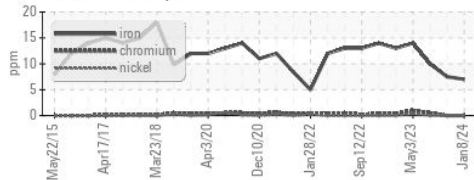


Non-ferrous Metals

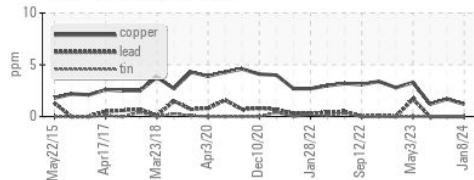


Viscosity @ 40°C

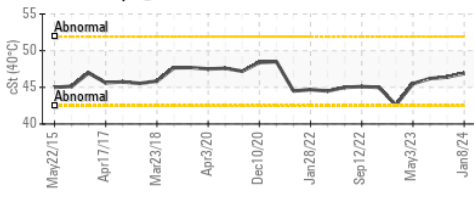

▲ Particle Count

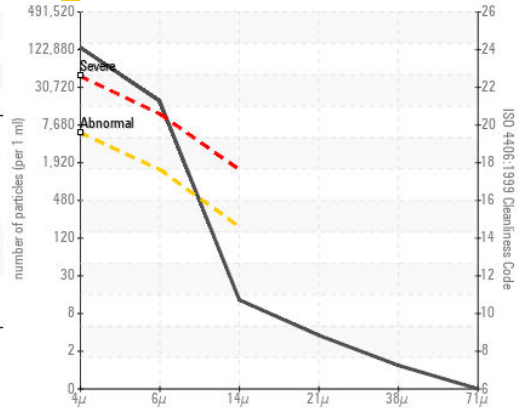

Acid Number

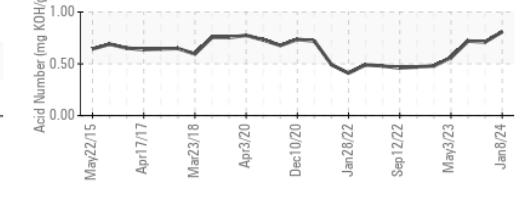

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10003077 **Recieved** : 16 Jan 2024
Lab Number : 06061043 **Diagnosed** : 17 Jan 2024
Unique Number : 10832425 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: KF, KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137

Contact: MIKE SNYDER
 msnyder@anchorstoneco.com

T: (417)850-9635

F: