




OIL ANALYSIS REPORT

Sample Rating Trend

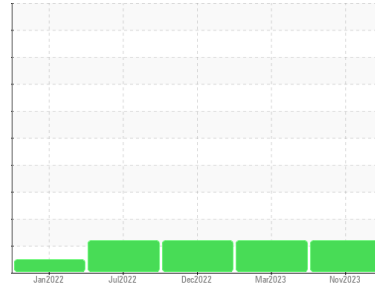

ISO



Area
DICK LAVY
 Machine Id
DICK LAVY 4862
 Component
Front Differential
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0876039 | WC0815588 | WC0765823 |
| Sample Date | Client Info | | 20 Nov 2023 | 08 Mar 2023 | 04 Dec 2022 |
| Machine Age | mls | Client Info | 207208 | 150028 | 98680 |
| Oil Age | mls | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | ABNORMAL | ABNORMAL | ABNORMAL |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >500 | 166 | 134 | 119 |
| Chromium | ppm | ASTM D5185m >10 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m >10 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >25 | <1 | 2 | 1 |
| Lead | ppm | ASTM D5185m >25 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185m >100 | <1 | <1 | <1 |
| Tin | ppm | ASTM D5185m >10 | <1 | 0 | <1 |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | 215 | 222 | 229 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 0 | <1 | 0 |
| Manganese | ppm | ASTM D5185m | 4 | 4 | 4 |
| Magnesium | ppm | ASTM D5185m | 0 | 1 | <1 |
| Calcium | ppm | ASTM D5185m | 0 | 3 | 3 |
| Phosphorus | ppm | ASTM D5185m | 1481 | 1488 | 1420 |
| Zinc | ppm | ASTM D5185m | 0 | 0 | 5 |
| Sulfur | ppm | ASTM D5185m | 23949 | 29142 | 27206 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >75 | 27 | 18 | 16 |
| Sodium | ppm | ASTM D5185m | 4 | 3 | 3 |
| Potassium | ppm | ASTM D5185m >20 | 0 | <1 | <1 |
| Water | % | ASTM D6304 >.2 | 0.037 | 0.033 | 0.035 |
| ppm Water | ppm | ASTM D6304 >2000 | 375 | 335.4 | 351.3 |

FLUID CLEANLINESS






| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-------------------|------------|------------|
| Particles >4µm | ASTM D7647 | >20000 | ▲ 141792 | ▲ 188430 | ▲ 166082 |
| Particles >6µm | ASTM D7647 | >5000 | ▲ 35194 | ▲ 90348 | ▲ 70191 |
| Particles >14µm | ASTM D7647 | >640 | 102 | 543 | 295 |
| Particles >21µm | ASTM D7647 | >160 | 10 | 41 | 36 |
| Particles >38µm | ASTM D7647 | >40 | 1 | 1 | 2 |
| Particles >71µm | ASTM D7647 | >10 | 0 | 0 | 1 |
| Oil Cleanliness | ISO 4406 (c) | >21/19/16 | ▲ 24/22/14 | ▲ 25/24/16 | ▲ 25/23/15 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 2.61 | 2.15 | 2.75 |




OIL ANALYSIS REPORT

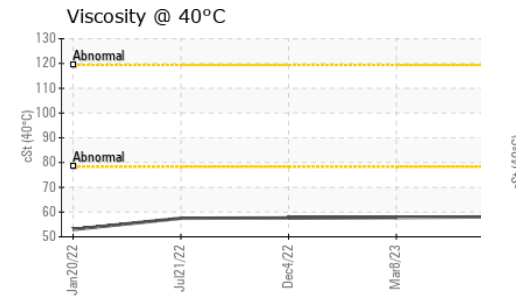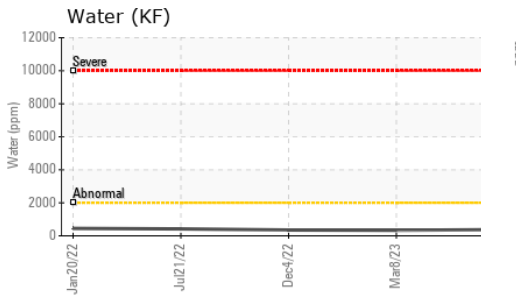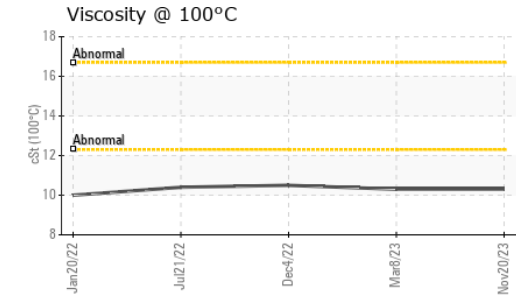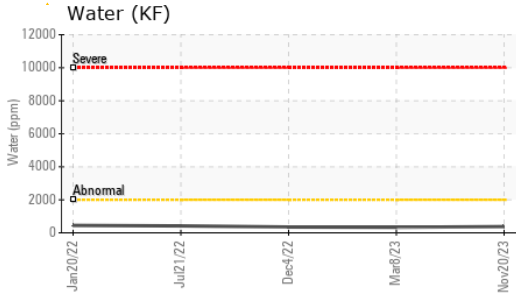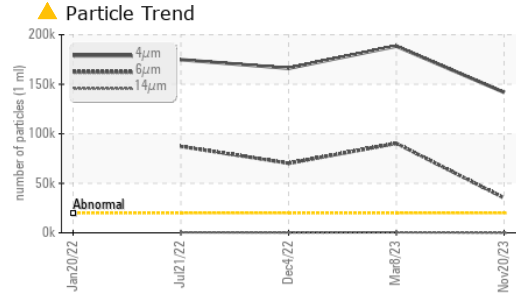






| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|----------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 58.1 | 57.8 | 57.6 |
| Visc @ 100°C | cSt | ASTM D445 | 10.3 | 10.3 | 10.5 |
| Viscosity Index (VI) | Scale | ASTM D2270 | 167 | 168 | 174 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

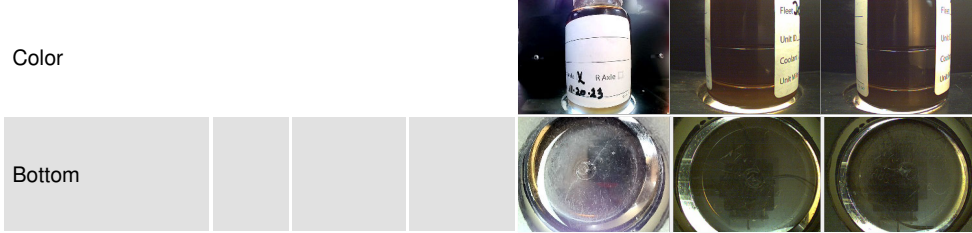

GRAPHS

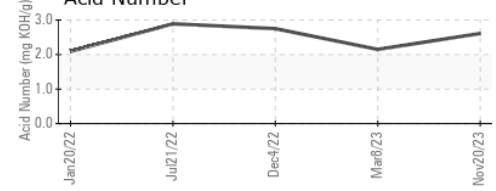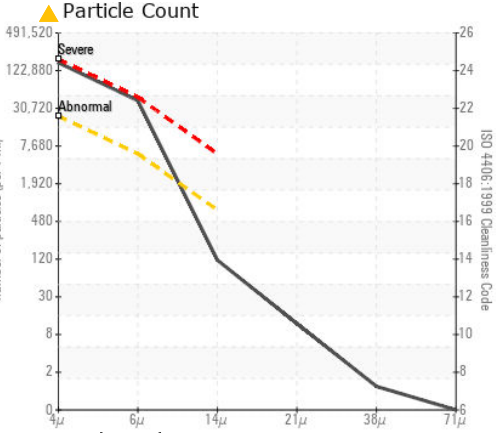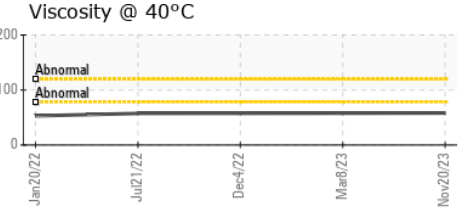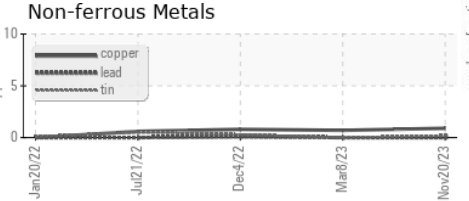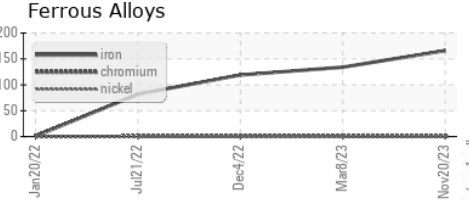

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0876039 **Received** : 16 Jan 2024
Lab Number : 06061051 **Diagnosed** : 17 Jan 2024
Unique Number : 10832433 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)