


# OIL ANALYSIS REPORT

Sample Rating Trend



ISO

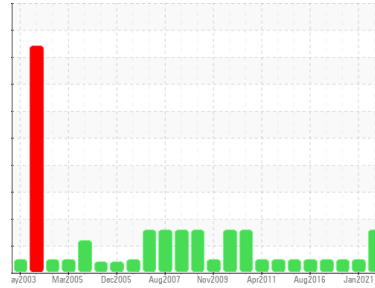

Machine Id  
**MACHINE 34 (S/N 80448)**

Component  
**Hydraulic System**

Fluid  
**ESSO NUTO H ISO 46 (175 GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible.

### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>RP0038674</b>	RP194107	RP99295
Sample Date	Client Info		<b>15 Jan 2024</b>	18 Jan 2021	09 Sep 2018
Machine Age	yrs	Client Info	<b>0</b>	0	0
Oil Age	yrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<1	<1	<1
Chromium	ppm	ASTM D5185m >20	0	<1	<1
Nickel	ppm	ASTM D5185m >20	0	0	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >20	0	<1	<1
Lead	ppm	ASTM D5185m >20	0	3	<1
Copper	ppm	ASTM D5185m >20	2	2	2
Tin	ppm	ASTM D5185m >20	0	0	<1
Antimony	ppm	ASTM D5185m	---	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	<1	0
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 0	0	0	0
Manganese	ppm	ASTM D5185m	0	0	<1
Magnesium	ppm	ASTM D5185m 5	0	<1	0
Calcium	ppm	ASTM D5185m 50	12	3	0
Phosphorus	ppm	ASTM D5185m 330	327	363	350
Zinc	ppm	ASTM D5185m 410	307	288	331

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<1	1	<1
Sodium	ppm	ASTM D5185m	<1	<1	0
Potassium	ppm	ASTM D5185m >20	0	2	<1
Water	%	ASTM D6304 >0.05	<b>0.006</b>	0.009	0.013
ppm Water	ppm	ASTM D6304 >500	<b>69</b>	92.1	130

## FLUID CLEANLINESS


	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ <b>11489</b>	2287	5026
Particles >6µm	ASTM D7647	>1300	▲ <b>3319</b>	600	846
Particles >14µm	ASTM D7647	>160	▲ <b>169</b>	59	78
Particles >21µm	ASTM D7647	>40	<b>36</b>	18	26
Particles >38µm	ASTM D7647	>10	<b>3</b>	0	1
Particles >71µm	ASTM D7647	>3	<b>1</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>21/19/15</b>	18/16/13	20/17/13

## FLUID DEGRADATION


	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.45	<b>0.43</b>	0.368	0.429

# OIL ANALYSIS REPORT


## ▲ Particle Trend

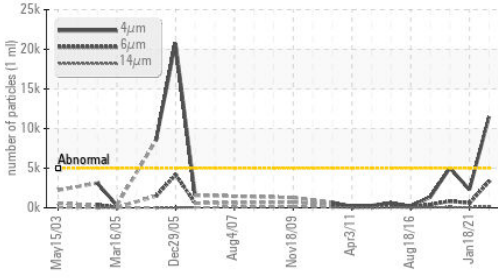


## Water (KF)

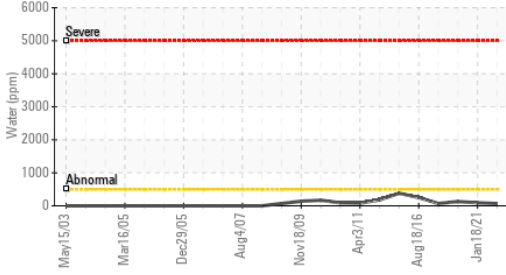


## Acid Number

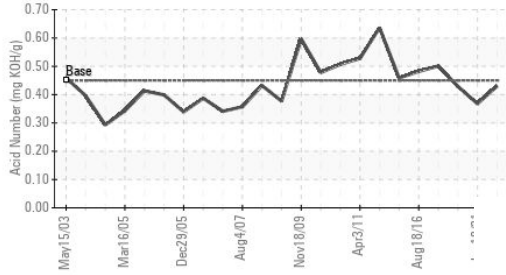

## Water (KF)

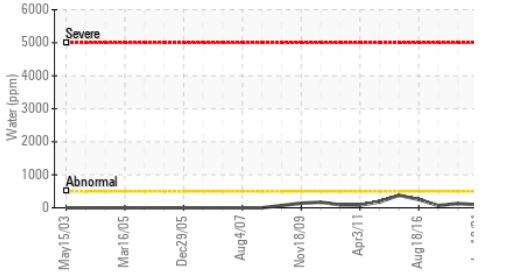


## Viscosity @ 40°C

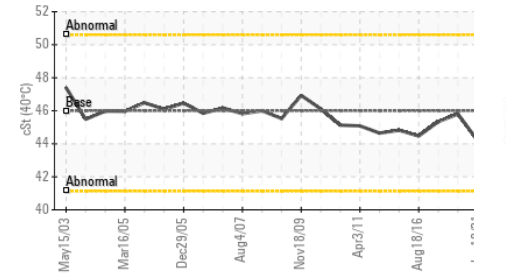

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	44.0	44.2	45.81

## SAMPLE IMAGES

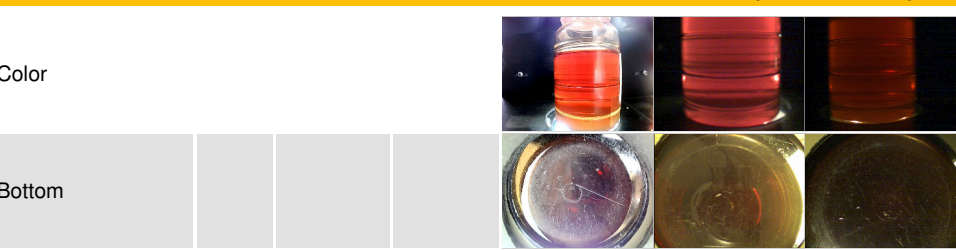


## GRAPHS


### Ferrous Alloys

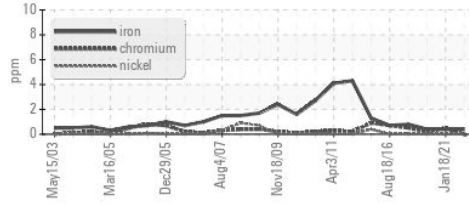


### Non-ferrous Metals

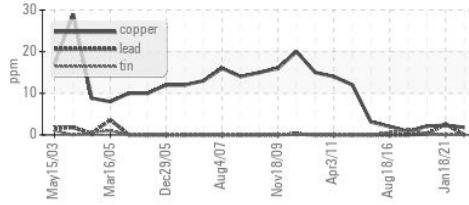


### Viscosity @ 40°C

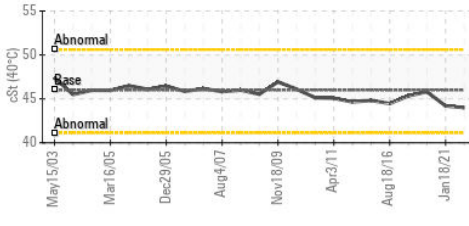

### ▲ Particle Count

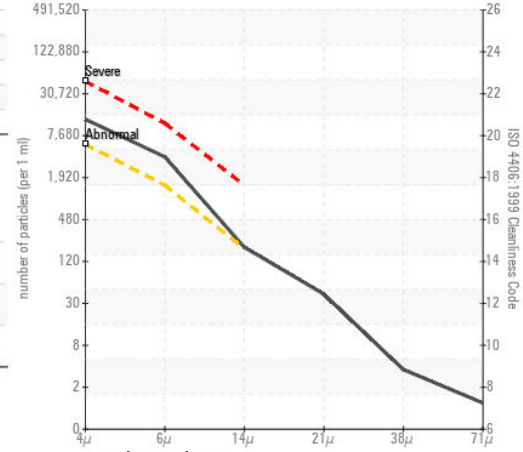

### Acid Number

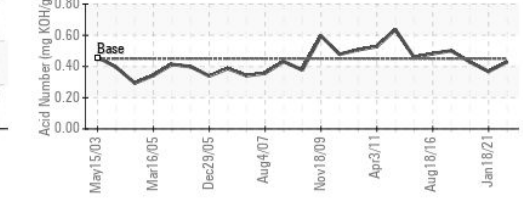

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RP0038674 **Recieved** : 16 Jan 2024  
**Lab Number** : 06061073 **Diagnosed** : 17 Jan 2024  
**Unique Number** : 10832455 **Diagnostician** : Wes Davis  
**Test Package** : IND 2

**YANFENG - ROMULUS**  
 9800 INKSTER RD  
 ROMULUS, MI  
 US 48174  
 Contact: AARON BLIESNER  
 aaron.bliesner@yanfeng.com  
 T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (734)946-0237