


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



MACHINE 29 (S/N 76261)

Component **Hydraulic System**

Fluid System

ESSO NUTO H ISO 46 (450 GAL)

1 A			
IΑ	NП	124	

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		ay2003 Mar	2005 Dec2005 Aug20	07 Nov2009 Oct2011 Oct2	017 Jan202	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		RP0038671	RP0010901	RP99303
Sample Date		Client Info		15 Jan 2024	18 Jan 2021	09 Sep 2018
Machine Age	yrs	Client Info		0	0	0
Oil Age	yrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1	2	3
Chromium	ppm	ASTM D5185m	>20	<1	1	<1
Nickel	ppm	ASTM D5185m	>20	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	<1	<1
Lead	ppm	ASTM D5185m	>20	0	3	<1
Copper	ppm	ASTM D5185m		5	5	8
Tin	ppm	ASTM D5185m	>20	1	<1	<1
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	5	2	0	0
Calcium	ppm	ASTM D5185m	50	31	1	18
Phosphorus	ppm	ASTM D5185m	330	335	330	319
Zinc	ppm	ASTM D5185m	410	364	257	309
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	<1	<1
Sodium	ppm	ASTM D5185m		1	<1	<1
Potassium	ppm	ASTM D5185m	>20	0	0	1
Water	%	ASTM D6304	>0.05	0.010	0.003	0.030
ppm Water	ppm	ASTM D6304	>500	104	35.4	300
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1748		<u>▲</u> 34807
Particles >6µm		ASTM D7647	>1300	303		▲ 3046
Particles >14μm		ASTM D7647	>160	15		72
Particles >21µm		ASTM D7647	>40	4		12
Particles >38µm		ASTM D7647	>10	0		0
Particles >71μm		ASTM D7647	>3	0		0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/15/11		<u>22/19/13</u>
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.45	0.42	0.356	0.468



OIL ANALYSIS REPORT

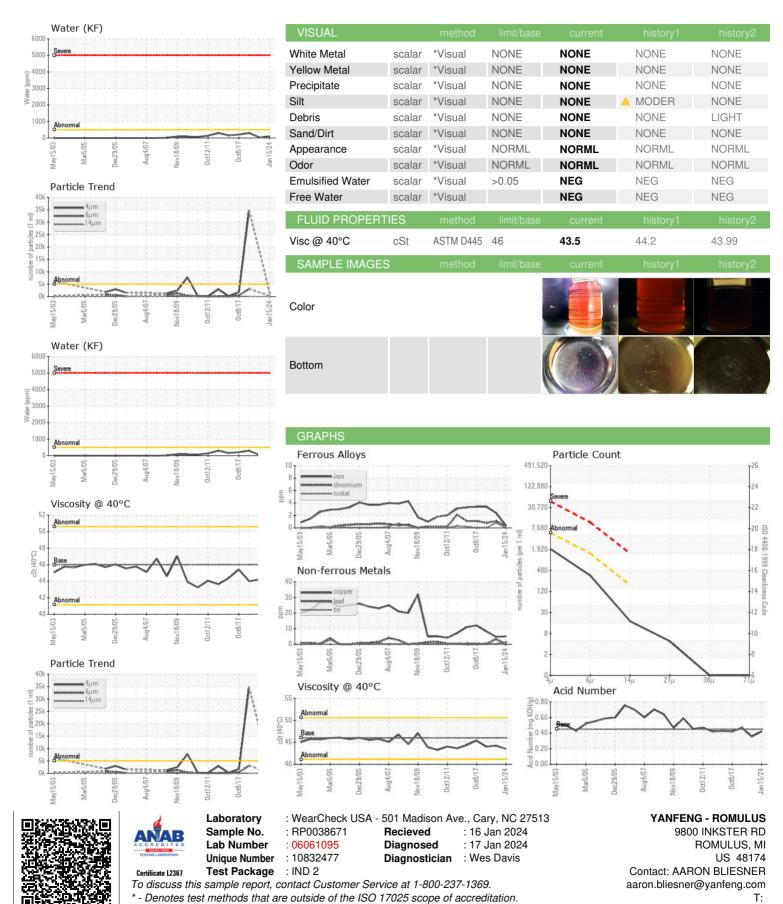

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (734)946-0237