


# **OIL ANALYSIS REPORT**



**VIS DEBRIS** 



# KAESER 4887028

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

## **DIAGNOSIS**

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

## Wear

All component wear rates are normal.

### Contamination

Moderate concentration of visible dirt/debris present in the oil.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Apr2022	Dec2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC06061126	KC104121	
Sample Date		Client Info		03 Dec 2023	28 Apr 2022	
Machine Age	hrs	Client Info		38433	32459	
Oil Age	hrs	Client Info		0	4120	
Oil Changed		Client Info		N/A	Changed	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	0	<1	
Lead	ppm	ASTM D5185m	>10	0	<1	
Copper	ppm	ASTM D5185m	>50	29	41	
Tin	ppm	ASTM D5185m	>10	1	<1	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m	90	0	0	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m	90	0	0	
Calcium	ppm	ASTM D5185m	2	0	0	
Phosphorus	ppm	ASTM D5185m		0	0	
Zinc	ppm	ASTM D5185m		0	0	
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	
Sodium	ppm	ASTM D5185m		<1	0	
Potassium	ppm	ASTM D5185m	>20	0	1	
Water	%	ASTM D6304	>0.05	0.013	0.007	
ppm Water	ppm	ASTM D6304	>500	138	75.7	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647			73221	
Particles >6μm		ASTM D7647	>1300		<u>^</u> 26551	
Particles >14μm		ASTM D7647	>80		<u></u> 4 3165 <u></u> 3165 <u></u> 3165 <u></u>	
Particles >21µm		ASTM D7647	>20		<u>^</u> 780	
Particles >38µm		ASTM D7647	>4		<u>▲</u> 56	
Particles >71µm		ASTM D7647	>3		0	
Oil Cleanliness		ISO 4406 (c)	>/17/13		<u>22/19</u>	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.36	0.35	



# **OIL ANALYSIS REPORT**

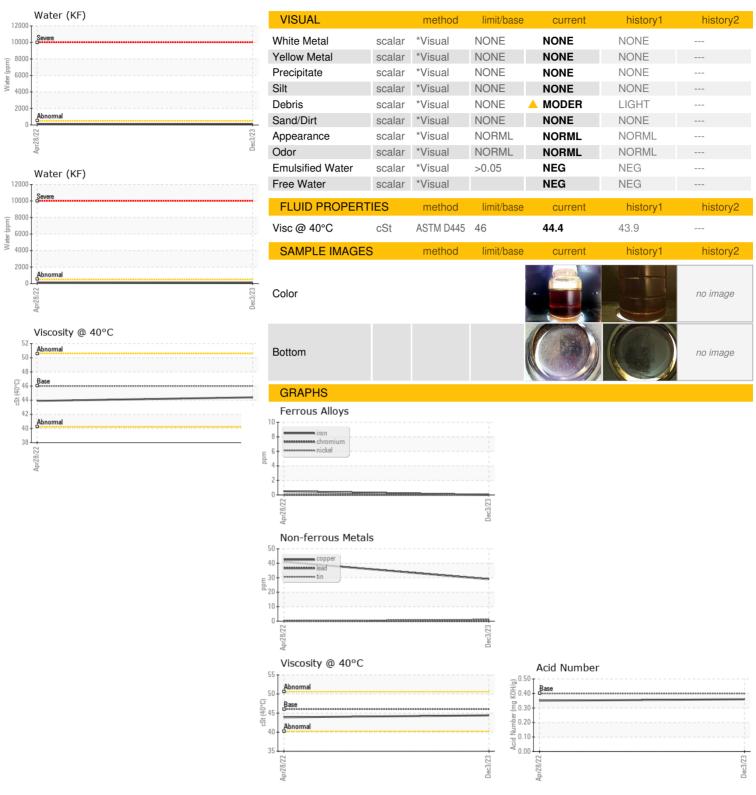





Laboratory Sample No. Lab Number **Unique Number** Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 06061126

: KC06061126 : 10832508

: 16 Jan 2024 Recieved Diagnosed

Diagnostician : Doug Bogart

: 17 Jan 2024

**VA HOSPITAL - BILOXI** 400 VETERANS AVE, BLDG 31 BILOXI, MS

US 39531

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: