

OIL ANALYSIS REPORT

Area ER-4 4MC3 (S/N 10241B02890456)

Component Refrigeration Compressor

USPI ALT-68 SC (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

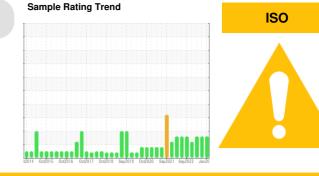

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0005030	USP0001655	USP255225
Sample Date		Client Info		02 Jan 2024	26 Sep 2023	27 Jun 2023
Machine Age	hrs	Client Info		0	0	67846
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	3	1	2
Chromium	ppm	ASTM D5185m	>2	<1	0	0
Nickel	ppm	ASTM D5185m		0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	0
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	0	0
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	<1	0
Sulfur	ppm	ASTM D5185m	50	0	0	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water	%	ASTM D6304	>0.01	0.003	0.008	0.008
ppm Water	ppm	ASTM D6304	>100	36	86.7	83.8
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	107843	▲ 74122	4 91519
Particles >6µm		ASTM D7647	>2500	<u> </u>	<u> </u>	▲ 33614
Particles >14µm		ASTM D7647	>320	A 324	6 50	6 35
Particles >21µm		ASTM D7647	>80	31	68	53
Particles >38µm		ASTM D7647	>20	1	2	1
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	4/22/16	▲ 23/22/17	▲ 24/22/16
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.014	0.015



Acid Number

r+5/16 lct2/17 c+4/18

Oct5/1

Water (KF)

Viscosity @ 40°C

0.02

(B/HO)

-Pg 0.01

0.00

250

20

E 150

100

5

72

70

cSt (40°C) 99 99 94


62


60

5

Water

OIL ANALYSIS REPORT

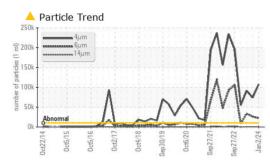

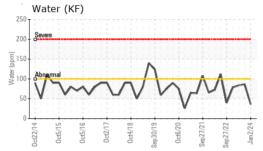


c+4/18 ep30/19



Bottom

1C/LCue

CILCUN

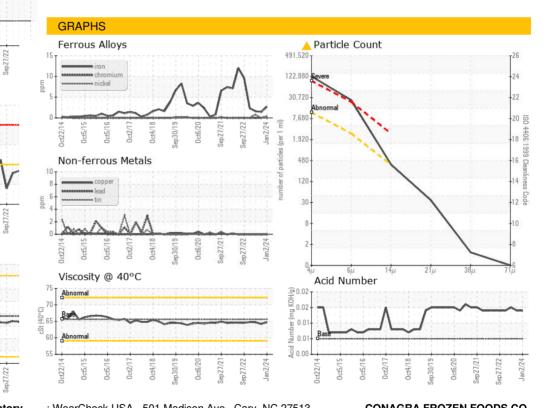

CILCUM Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513 **CONAGRA FROZEN FOODS CO** Sample No. : USP0005030 Recieved : 16 Jan 2024 Lab Number :06061155 RUSSELLVILLE, AR Diagnosed : 17 Jan 2024 Unique Number : 10832537 Diagnostician : Doug Bogart US Test Package : IND 2 Contact: SERVICE MANAGER Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T:

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)