


# **OIL ANALYSIS REPORT**

# ENG RM 4 4MC4 (S/N 0574)

**Refrigeration Compressor** 

USPI ALT-68 SC (--- GAL)



Sample Rating Trend



## **DIAGNOSIS**

#### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

-z/2014 Ocz/2016 Ocz/2017 Ocz/2018 Docz/2019 Jan/2021 Docz/2021 Docz/2022 Jan/20						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0005021	USP0001630	USP255226
Sample Date		Client Info		02 Jan 2024	26 Sep 2023	27 Jun 2023
Machine Age	hrs	Client Info		0	0	82190
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	13	22	22
Chromium	ppm	ASTM D5185m	>2	<1	0	0
Nickel	ppm	ASTM D5185m		0	<1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	<1
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	0	0
Tin	ppm	ASTM D5185m	>4	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	1	0
Sulfur	ppm	ASTM D5185m	50	0	0	4
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	<1	0	2
Water	%	ASTM D6304	>0.01	0.007	0.007	0.009
ppm Water	ppm	ASTM D6304	>100	72	76.5	96.5
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<b>▲</b> 55265	<b>▲</b> 41176	<u></u> 21500
Particles >6µm		ASTM D7647	>2500	<u> </u>	<b>9200</b>	<b>4604</b>
Particles >14µm		ASTM D7647	>320	<b>535</b>	218	55
Particles >21µm		ASTM D7647	>80	<u>^</u> 86	33	6
Particles >38µm		ASTM D7647	>20	0	2	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<b>23/21/16</b>	<b>23/20/15</b>	<u>22/19/13</u>
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.013	0.014



# OIL ANALYSIS REPORT

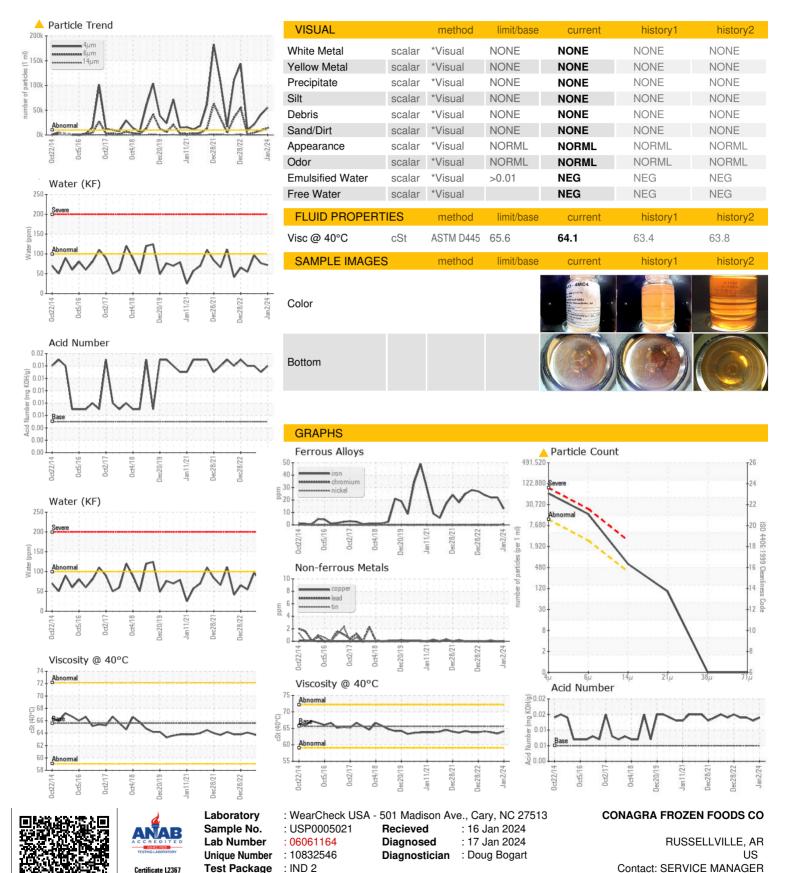

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: