

OIL ANALYSIS REPORT

Area ER-1 Machine Id C-11 (S/N S0431TFMCTHAA03) Component

Refrigeration Compressor

FRICK COMPRESSOR OIL #3 (130 GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

🔺 Wear


The iron level is abnormal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

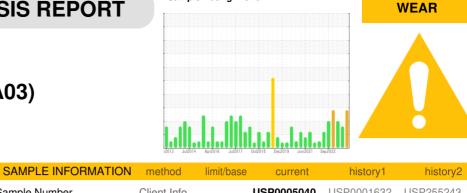

Sample Rating Trend

SAMPLE INFORM		method	limit/base	current	history i	history2
Sample Number		Client Info		USP0005040	USP0001632	USP255243
Sample Date		Client Info		02 Jan 2024	26 Sep 2023	28 Jun 2023
Machine Age	hrs	Client Info		29143	27871	27871
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ATTENTION	ABNORMAL
		un atla a d	line it /le e e e			
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	<mark>/</mark> 89	<u> </u>	<u> </u>
Chromium	ppm	ASTM D5185m	>2	<1	0	0
Nickel	ppm	ASTM D5185m		0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	0
Lead	ppm	ASTM D5185m	>2	0	<1	<1
Copper	ppm	ASTM D5185m	>8	4	2	2
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		<1	<1	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		3	17	16
Sulfur	ppm	ASTM D5185m		25	74	53
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
Sodium	ppm	ASTM D5185m		3	<1	0
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1
Water	%	ASTM D6304	>0.01	0.003	0.002	0.003
ppm Water	ppm	ASTM D6304	>100	31	25.0	34.2
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	197107	▲ 15904	▲ 52598
Particles >6µm		ASTM D7647	>2500	🔺 113368	2407	▲ 10916
Particles >14µm		ASTM D7647	>320	<u> </u>	82	294
Particles >21µm		ASTM D7647	>80	6 579	15	33
Particles >38µm		ASTM D7647	>20	5	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	25/24/20	▲ 21/18/14	▲ 23/21/15
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	- in the base	0.073	0.069	0.014
Acid Number (AN)	ilig KOH/g	ASTIVI D9/4		0.073	0.069	0.014



2

0.08

0.07

(B/HOX Bu)

0.04

0.03 Pg 0.02

0.01

0.00

50

400


E 300


Nater Nater


100

lan 8/1

OIL ANALYSIS REPORT

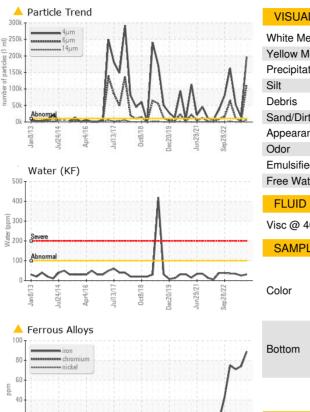

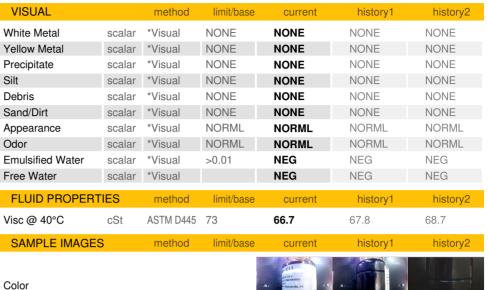

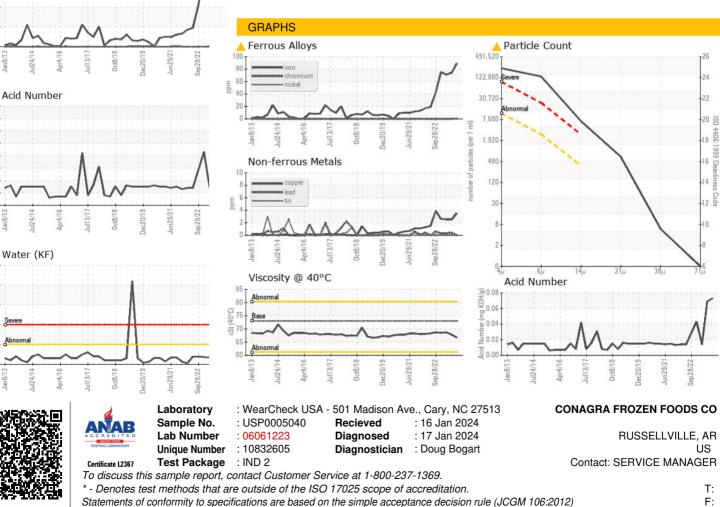

Contact/Location: SERVICE MANAGER ? - CONRUS