


OIL ANALYSIS REPORT

[] WC-9800-0105-5 Chiller #5

Component Chiller

YORK TYPE K (--- GAL)





DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a trace of moisture present in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | Jun2023 | Jan 2024 | | |
|------------------|----------|--------------|------------|----------------|-------------|----------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | WC0836507 | WC0827392 | |
| Sample Date | | Client Info | | 09 Jan 2024 | 25 Jun 2023 | |
| Machine Age | hrs | Client Info | | 62566 | 60549 | |
| Oil Age | hrs | Client Info | | 0 | 0 | |
| Oil Changed | | Client Info | | N/A | N/A | |
| Sample Status | | | | MARGINAL | ABNORMAL | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >8 | <1 | 2 | |
| Chromium | ppm | ASTM D5185m | >2 | <1 | 0 | |
| Nickel | ppm | ASTM D5185m | | 0 | 0 | |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | |
| Aluminum | ppm | ASTM D5185m | >3 | 2 | 0 | |
| Lead | ppm | ASTM D5185m | >2 | 0 | 0 | |
| Copper | ppm | ASTM D5185m | >8 | 0 | 0 | |
| Tin | ppm | ASTM D5185m | >4 | 0 | <1 | |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 0 | 0 | 0 | |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | 0 | |
| Manganese | ppm | ASTM D5185m | 0 | 0 | <1 | |
| Magnesium | ppm | ASTM D5185m | 0 | 0 | 0 | |
| Calcium | ppm | ASTM D5185m | 0 | 0 | 0 | |
| Phosphorus | ppm | ASTM D5185m | 5 | 32 | 1 | |
| Zinc | ppm | ASTM D5185m | 0 | 0 | 0 | |
| Sulfur | ppm | ASTM D5185m | 10 | 0 | 22 | |
| CONTAMINANTS | 3 | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >15 | 15 | <u> </u> | |
| Sodium | ppm | ASTM D5185m | | 2 | 0 | |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 0 | |
| Water | % | ASTM D6304 | >0.03 | △ 0.035 | 0.063 | |
| ppm Water | ppm | ASTM D6304 | >300 | △ 359 | 638.5 | |
| FLUID CLEANLIN | NESS | method | limit/base | current | history1 | history2 |
| Particles >4μm | | ASTM D7647 | >10000 | 401 | 4892 | |
| Particles >6μm | | ASTM D7647 | >2500 | 79 | 819 | |
| Particles >14μm | | ASTM D7647 | >320 | 8 | 17 | |
| Particles >21μm | | ASTM D7647 | >80 | 2 | 3 | |
| Particles >38µm | | ASTM D7647 | >20 | 0 | 0 | |
| Particles >71μm | | ASTM D7647 | >4 | 0 | 0 | |
| Oil Cleanliness | | ISO 4406 (c) | >20/18/15 | 16/13/10 | 19/17/11 | |
| FLUID DEGRADA | ATION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.03 | 0.014 | 0.014 | |



OIL ANALYSIS REPORT

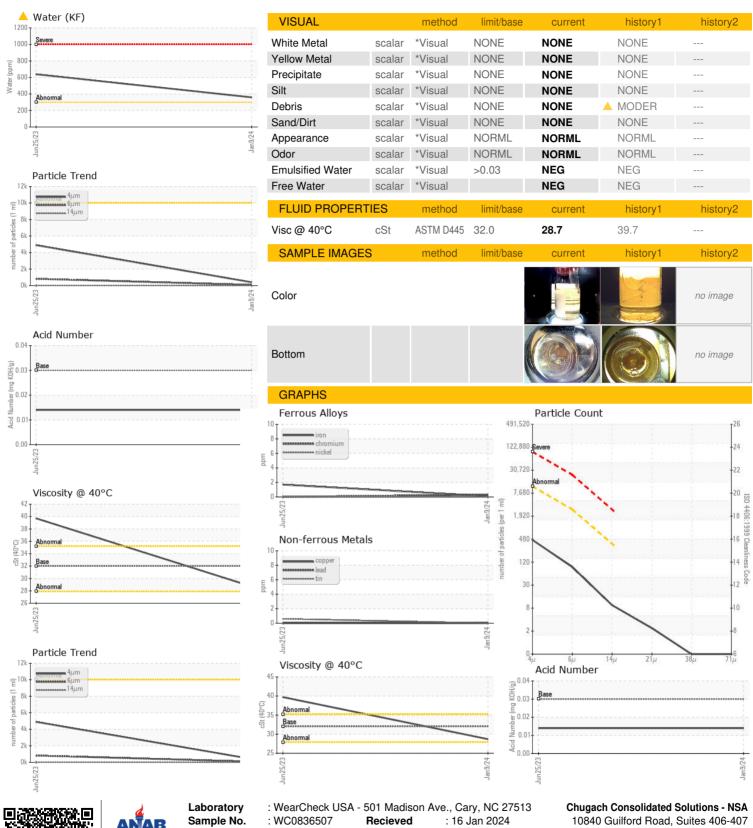



Certificate L2367

Lab Number **Unique Number** Test Package

: 06061245 : 10832627 : PLANT

Diagnosed Diagnostician

: 30 Jan 2024 : Doug Bogart

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) Annapolis Junction, MD US 20701

Contact: Susan Nord susan.nord@chugachgov.com

T: (301)688-6363 F: (443)479-5666