




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
timberpro TL745D SCHAEFER LOGGING (S/N TL745D0832041321)
 Component
Right Final Drive
 Fluid
{not provided} (--- GAL)

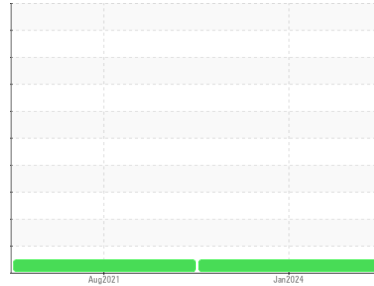

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
 Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0614555	WC0589694	---
Sample Date	Client Info			02 Jan 2024	17 Aug 2021	---
Machine Age	hrs	Client Info		347	0	---
Oil Age	hrs	Client Info		0	125	---
Oil Changed	Client Info			N/A	Not Changd	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	196	51	---
Chromium	ppm	ASTM D5185m	>10	7	<1	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	12	1	---
Lead	ppm	ASTM D5185m	>25	3	<1	---
Copper	ppm	ASTM D5185m	>50	9	5	---
Tin	ppm	ASTM D5185m	>10	<1	<1	---
Antimony	ppm	ASTM D5185m	>5	---	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	9	---
Barium	ppm	ASTM D5185m		17	0	---
Molybdenum	ppm	ASTM D5185m		0	<1	---
Manganese	ppm	ASTM D5185m		6	2	---
Magnesium	ppm	ASTM D5185m		13	8	---
Calcium	ppm	ASTM D5185m		2949	2762	---
Phosphorus	ppm	ASTM D5185m		1037	924	---
Zinc	ppm	ASTM D5185m		1273	1111	---
Sulfur	ppm	ASTM D5185m		7297	6277	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	37	5	---
Sodium	ppm	ASTM D5185m		2	4	---
Potassium	ppm	ASTM D5185m	>20	<1	0	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	LIGHT	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
Free Water	scalar	*Visual		NEG	---	---



OIL ANALYSIS REPORT








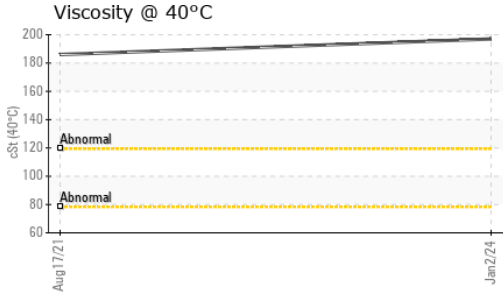


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	197	186	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

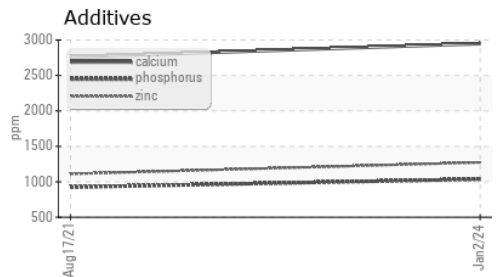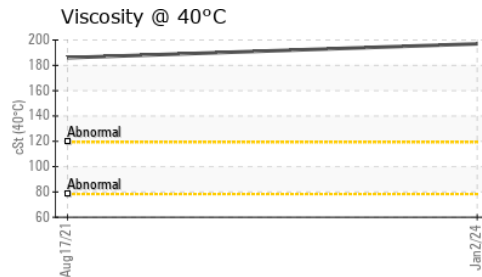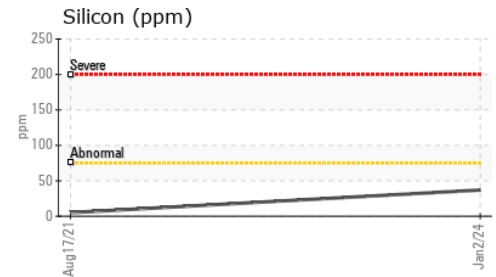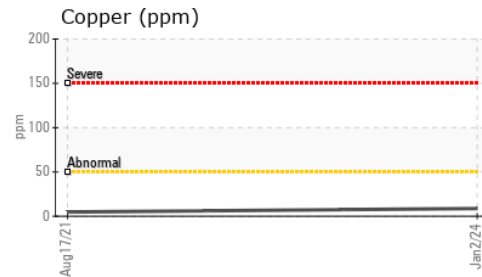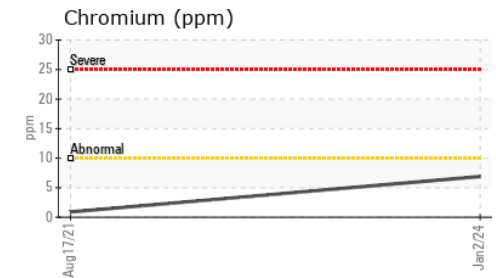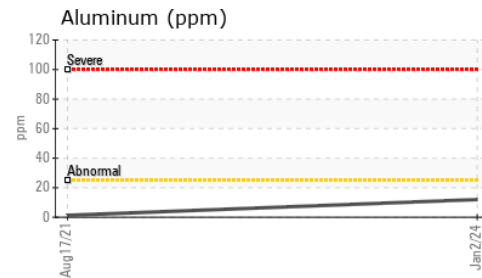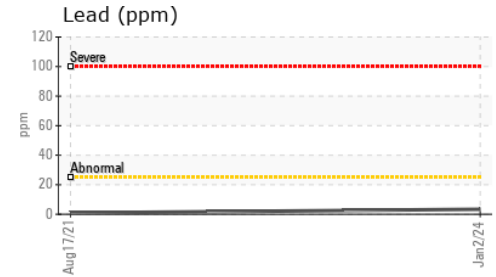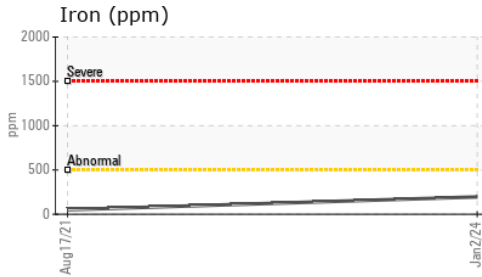

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0614555 **Received** : 16 Jan 2024
Lab Number : **06061528** **Diagnosed** : 17 Jan 2024
Unique Number : 10832910 **Diagnostician** : Wes Davis
Test Package : MOBCE

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CJ LOGGING
 8730 INDUSTRIAL DRIVE
 BOONVILLE, NY
 US 13309
 Contact: SUE CAIN
 sue@cjlogequip.com
 T: (315)942-5431
 F: