




OIL ANALYSIS REPORT

Sample Rating Trend

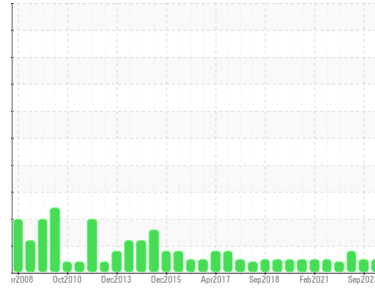

NORMAL



Area
OKLAHOMA/1151/EG - OTHER SERVICE
 Machine Id
48.03L [OKLAHOMA^1151^EG - OTHER SERVICE]
 Component
Front Differential
 Fluid
MOBIL MOBILTRANS AST 30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Confirm oil type. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0848850	WC0778261	WC0792417
Sample Date	Client Info		21 Dec 2023	29 Sep 2023	16 May 2023
Machine Age	hrs	Client Info	20253	19862	19253
Oil Age	hrs	Client Info	487	1000	500
Oil Changed	Client Info		Not Chngd	Changed	Not Chngd
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	327	414	▲ 551
Chromium	ppm	ASTM D5185m >3	<1	1	2
Nickel	ppm	ASTM D5185m >3	<1	<1	<1
Titanium	ppm	ASTM D5185m >2	<1	<1	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >30	2	2	4
Lead	ppm	ASTM D5185m >13	0	<1	0
Copper	ppm	ASTM D5185m >103	7	23	19
Tin	ppm	ASTM D5185m >5	0	0	0
Antimony	ppm	ASTM D5185m >5	---	---	---
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<1	<1	1
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	9	14	23
Manganese	ppm	ASTM D5185m	3	5	6
Magnesium	ppm	ASTM D5185m	<1	13	7
Calcium	ppm	ASTM D5185m	237	2963	3065
Phosphorus	ppm	ASTM D5185m	526	1060	1051
Zinc	ppm	ASTM D5185m	93	1268	1283
Sulfur	ppm	ASTM D5185m	960	7672	7593

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >100	35	6	8
Sodium	ppm	ASTM D5185m	6	37	36
Potassium	ppm	ASTM D5185m >20	2	2	1

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG



OIL ANALYSIS REPORT



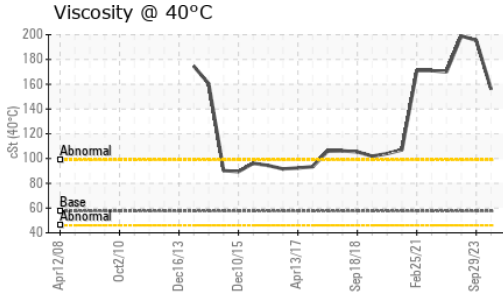


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	57.6	156	195.5	199

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

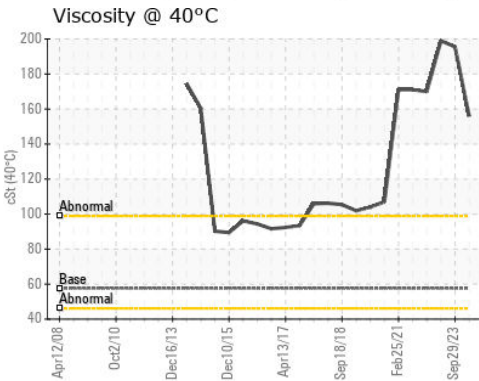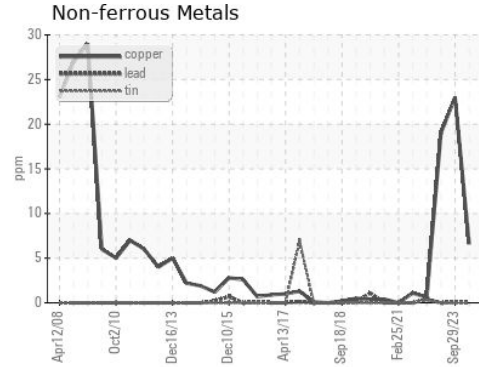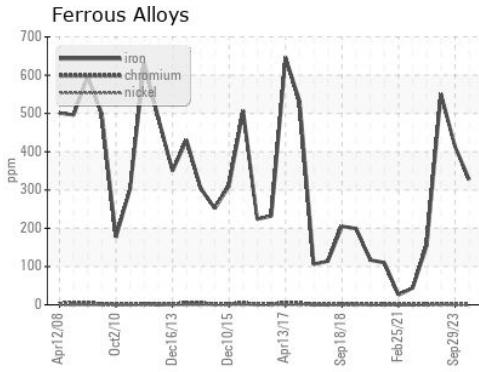

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0848850 **Received** : 16 Jan 2024
Lab Number : **06061571** **Diagnosed** : 17 Jan 2024
Unique Number : 10832953 **Diagnostician** : Don Baldrige
Test Package : CONST

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)