



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**102201 GOMACO RTP**  
 Component  
**Gearbox**  
 Fluid  
**SAE 75W90 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>SBP0005743</b>	---	---
Sample Date	Client Info		<b>11 Jan 2024</b>	---	---
Machine Age	hrs	Client Info	<b>2158</b>	---	---
Oil Age	hrs	Client Info	<b>224</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>503</b>	---	---
Chromium	ppm	ASTM D5185m >10	<b>3</b>	---	---
Nickel	ppm	ASTM D5185m >10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >25	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m >50	<b>1</b>	---	---
Copper	ppm	ASTM D5185m >200	<b>122</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>9</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>213</b>	---	---
Barium	ppm	ASTM D5185m	<b>11</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>3</b>	---	---
Manganese	ppm	ASTM D5185m	<b>5</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>18</b>	---	---
Calcium	ppm	ASTM D5185m	<b>39</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>1716</b>	---	---
Zinc	ppm	ASTM D5185m	<b>27</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>22100</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>22</b>	---	---
Sodium	ppm	ASTM D5185m	<b>4</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	---	---

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.1</b>	---	---
Nitration	Abs/cm	*ASTM D7624	<b>3.7</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	<b>24.1</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	<b>8.1</b>	---	---



# OIL ANALYSIS REPORT


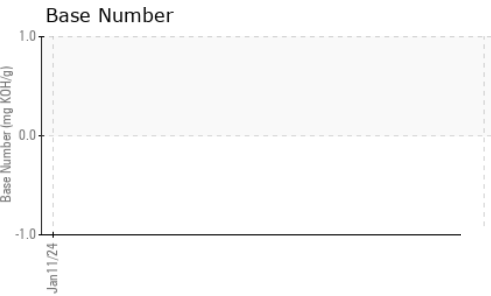
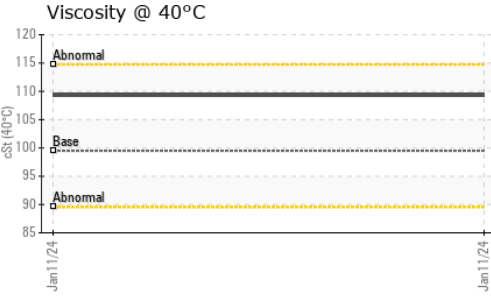
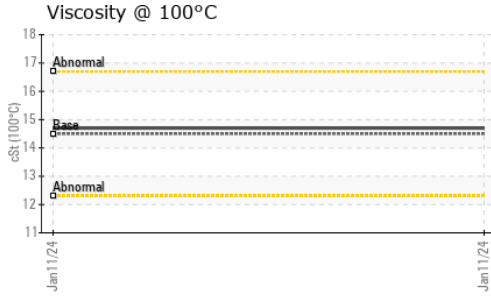


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>MODER</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	99.5	<b>109.3</b>	---	---
Visc @ 100°C	cSt	ASTM D445	14.5	<b>14.7</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270	150	<b>138</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2	
Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

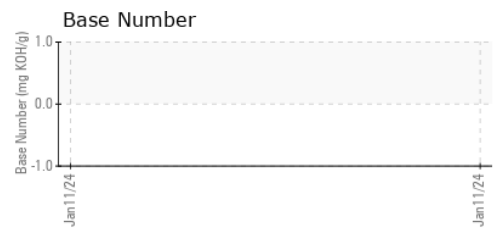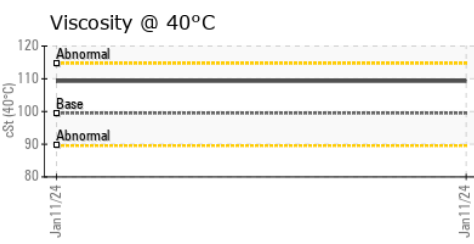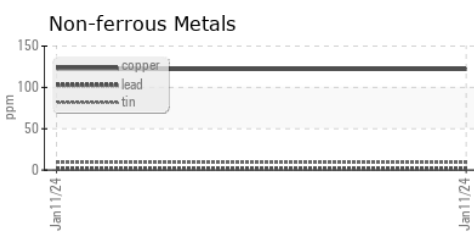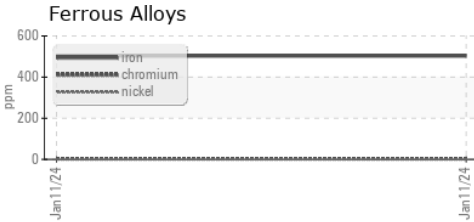

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0005743 **Recieved** : 16 Jan 2024  
**Lab Number** : **06061878** **Diagnosed** : 23 Jan 2024  
**Unique Number** : 10833260 **Diagnostician** : Doug Bogart  
**Test Package** : FLEET ( Additional Tests: FT-IR, KV100, TBN, VI )

**Constructors Inc. - 603659**  
 1815 Y Street  
 Lincoln, NE  
 US 68508  
 Contact: Loren Michael  
 LorenM@constructorslincoln.com  
 T: (402)434-2157  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)