


# **OIL ANALYSIS REPORT**



# CATERPILLAR 330DL EX6125 (S/N 0MWP03368)

Component **Hydraulic System** 

**DURALENE ZD ADVA** 





**DIAGNOSIS** 

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 6 microns in size) present in the oil.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

ICED 46 ( CA						
NCED 46 ( GA	L)			Jan2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		DC0032543		
Sample Date		Client Info		12 Jan 2024		
Machine Age	hrs	Client Info		15202		
Oil Age	hrs	Client Info		15202		
Oil Changed	1110	Client Info		N/A		
Sample Status				ABNORMAL		
CONTAMINATIO	V	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	14		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>10	2		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>75	3		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m	>10	0		
Cadmium	ppm	ASTM D5185m		0		
	ррпп					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		34		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		6		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		68		
Calcium	ppm	ASTM D5185m		2888		
Phosphorus	ppm	ASTM D5185m		874		
Zinc	ppm	ASTM D5185m		1254		
Sulfur	ppm	ASTM D5185m		4258		
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	8		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	3		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>22564</b>		
Particles >6µm		ASTM D7647	>1300	432		
Particles >14μm		ASTM D7647	>160	15		
Particles >21µm		ASTM D7647	>40	6		
Particles >38µm		ASTM D7647	>10	1		
Particles >71μm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<u>22/16/11</u>		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		1.57		



## **OIL ANALYSIS REPORT**

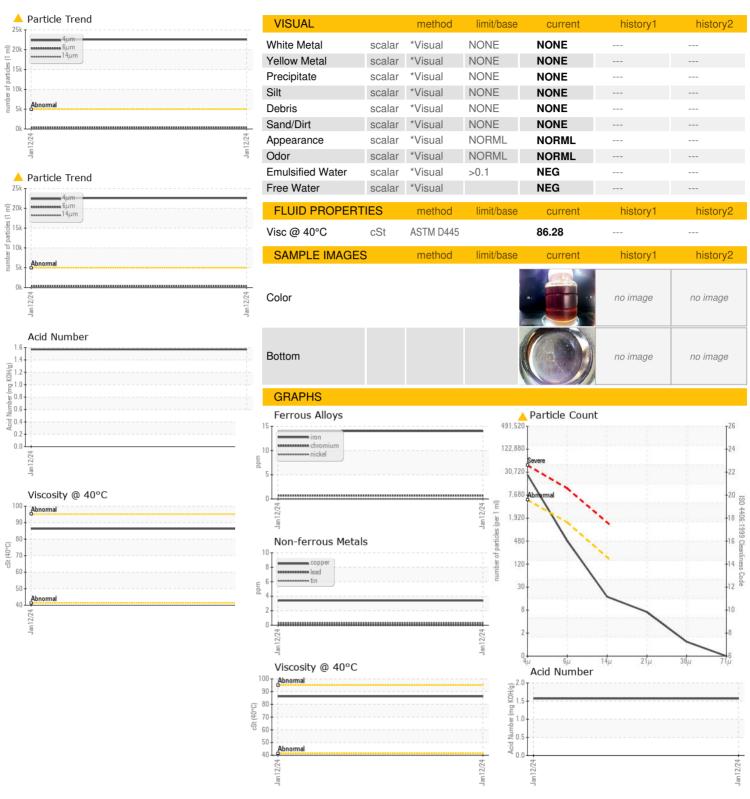





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number** 

: DC0032543 : 06061907 : 10833289 Test Package : MOB 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 16 Jan 2024 Recieved Diagnosed : 23 Jan 2024

Diagnostician : Doug Bogart

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) **COMER CONSTRUCTION** 

2100 SLADE LANE FOREST HILL, MD US 21050

Contact: DONALD FOX dfox@comerconstruction.com

T: (443)269-1379

F: (410)638-0289 Submitted By: DONALD FOX