


# OIL ANALYSIS REPORT

Sample Rating Trend



**WATER**

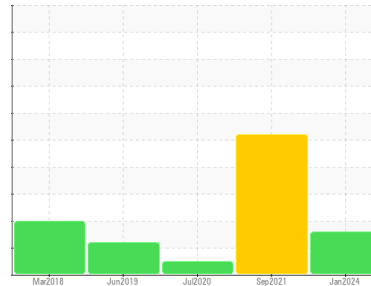

Machine Id  
**KAESER SX 5 3564068 (S/N 1084)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) M-460 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a trace of moisture present in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KCPA011502</b>	KCP42446	KCP10263
Sample Date	Client Info		<b>05 Jan 2024</b>	06 Sep 2021	29 Jul 2020
Machine Age	hrs	Client Info	<b>10104</b>	9583	9294
Oil Age	hrs	Client Info	<b>0</b>	236	208
Oil Changed	Client Info		<b>N/A</b>	Changed	Changed
Sample Status			<b>MARGINAL</b>	ABNORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>0</b>	1	<1
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>2</b>	0	0
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m >50	<b>1</b>	3	3
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	14	0
Barium	ppm	ASTM D5185m 90	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 100	<b>36</b>	52	36
Calcium	ppm	ASTM D5185m 0	<b>1</b>	10	0
Phosphorus	ppm	ASTM D5185m 0	<b>32</b>	11	3
Zinc	ppm	ASTM D5185m 0	<b>0</b>	46	44
Sulfur	ppm	ASTM D5185m 23500	<b>13143</b>	16989	16108

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>0</b>	1	<1
Sodium	ppm	ASTM D5185m	<b>2</b>	9	16
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	3
Water	%	ASTM D6304 >0.05	<b>▲ 0.053</b>	▲ 0.878	0.025
ppm Water	ppm	ASTM D6304 >500	<b>▲ 532</b>	▲ 8780	257.4






## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>2577</b>	---	1362
Particles >6µm	ASTM D7647	>1300	<b>597</b>	---	271
Particles >14µm	ASTM D7647	>80	<b>61</b>	---	16
Particles >21µm	ASTM D7647	>20	<b>23</b>	---	3
Particles >38µm	ASTM D7647	>4	<b>2</b>	---	0
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	0
Oil Cleanliness	ISO 4406 (c)	>--/17/13	<b>19/16/13</b>	---	15/11

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	<b>0.31</b>	0.323	0.275


# OIL ANALYSIS REPORT

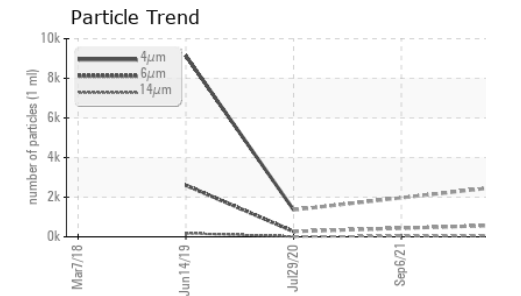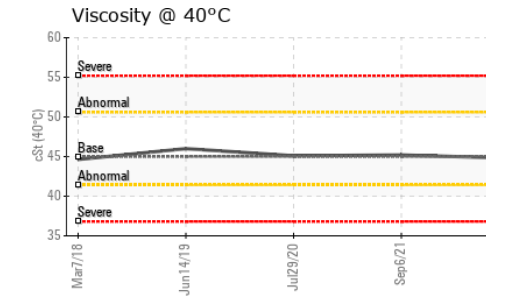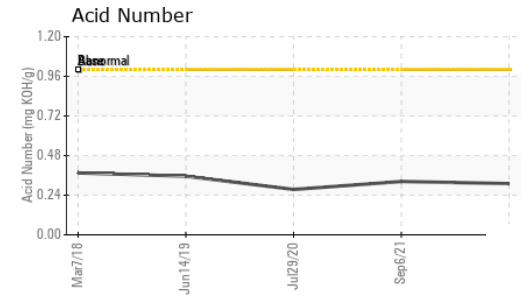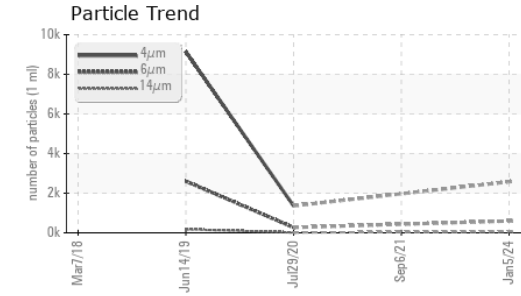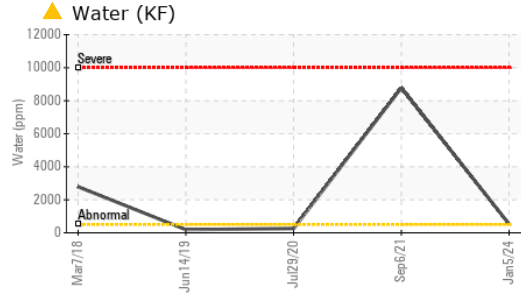






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	▲ MODER
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	▲ HAZY
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	▲ 1.0

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	45	44.8	45.2	45.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

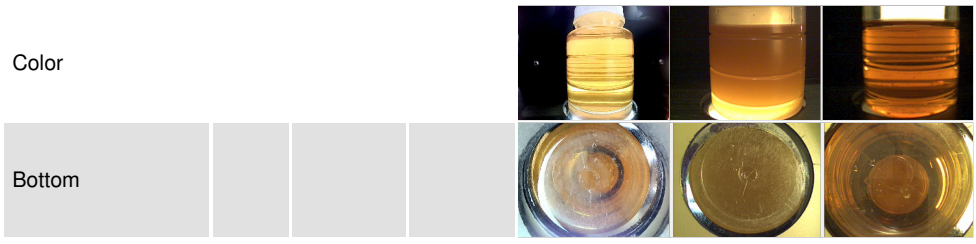

## GRAPHS

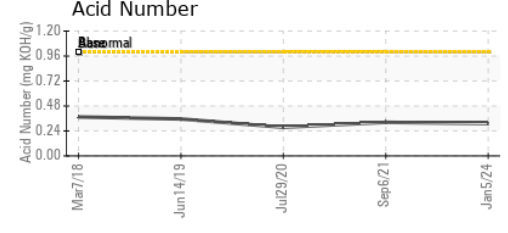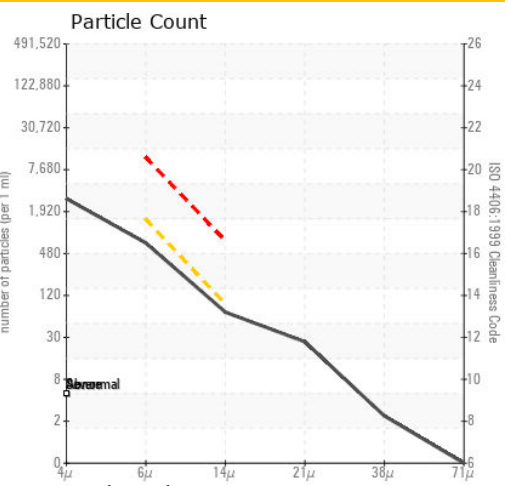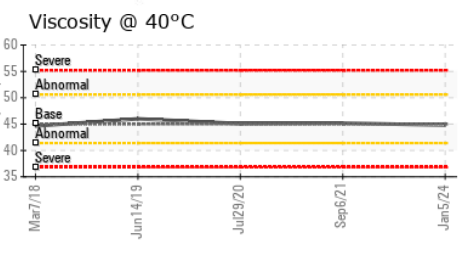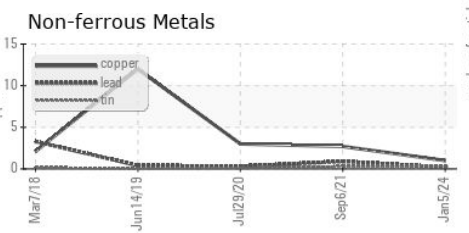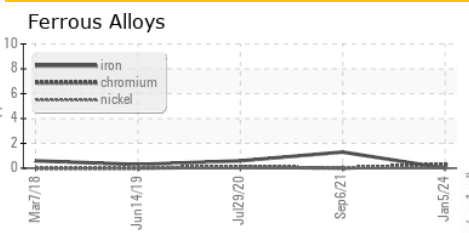

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA011502 **Received** : 16 Jan 2024  
**Lab Number** : 06061958 **Diagnosed** : 18 Jan 2024  
**Unique Number** : 10833340 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**THE PROS CAR CARE CENTER**  
 44 CHAUNCY STREET  
 MANSFIELD, MA  
 US 02048  
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: