


OIL ANALYSIS REPORT

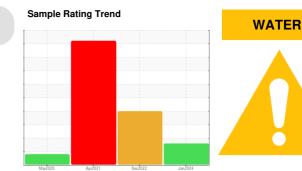

Component Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

KAESER 5288925

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. We were unable to perform a particle count on this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a light concentration of water present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		KCPA011146	KCP45777	KCP32243	
Sample Date		Client Info		04 Jan 2024	06 Dec 2022	30 Apr 2021	
Machine Age	hrs	Client Info		24279	17541	8169	
Oil Age	hrs	Client Info		0	737	3899	
Oil Changed		Client Info		N/A	Changed	Changed	
Sample Status				ABNORMAL	ABNORMAL	SEVERE	
	_	un e tie e el	line it /le e e e	-			
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>50	0	<1	0	
Chromium	ppm	ASTM D5185m	>10	<1	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	0	
Titanium	ppm	ASTM D5185m		<1	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	<1	
Aluminum	ppm	ASTM D5185m	>10	2	<1	0	
Lead	ppm	ASTM D5185m	>10	0	0	0	
Copper	ppm	ASTM D5185m	>50	6	8	8	
Tin	ppm	ASTM D5185m	>10	<1	<1	<1	
Antimony	ppm	ASTM D5185m				0	
Vanadium	ppm	ASTM D5185m		0	0	0	
Cadmium	ppm	ASTM D5185m		0	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	<1	
Barium	ppm	ASTM D5185m	90	0	0	2	
Molybdenum		ASTM D5185m	50	0	0	0	
Manganese	ppm ppm	ASTM D5185m		0	0	<1	
Magnesium		ASTM D5185m	90	16	20	27	
Calcium	ppm	ASTM D5185m		<1	0	0	
	ppm	ASTM D5185m	2	32	15	6	
Phosphorus	ppm						
Zinc	ppm	ASTM D5185m		0	12	23	
Sulfur	ppm	ASTM D5185m		18436	20094	17740	
CONTAMINANTS	3	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	0	<1	<1	
Sodium	ppm	ASTM D5185m		0	3	<1	
Potassium	ppm	ASTM D5185m	>20	2	0	<1	
Water	%	ASTM D6304	>0.05	6.077	0.290	12.8	
ppm Water	ppm	ASTM D6304	>500	A 764	2 900	128000	
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647			444		
Particles >6µm		ASTM D7647	>1300		242		
Particles >14µm		ASTM D7647	>80		41		
Particles >21µm		ASTM D7647	>20		14		
Particles >38μm		ASTM D7647	>4		2		
Particles >71µm		ASTM D7647	>3		0		
Oil Cleanliness		ISO 4406 (c)	>/17/13		16/15/13		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.28	0.27	0.305	
:48:49) Rev: 1	ing itoriy	, 10 I W D0040	0.7	Contact/Location: Service Manager - DAVWO			


Report Id: DAVWOB [WUSCAR] 06061979 (Generated: 01/23/2024 21:48:49) Rev: 1


Contact/Location: Service Manager - DAVWOB



OIL ANALYSIS REPORT

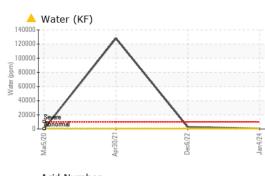

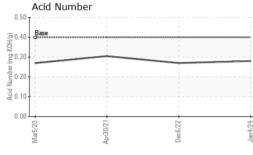




VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	HEAVY	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	A HAZY	A HAZY
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	 0.2%	0.2%	NEG
Free Water	scalar	*Visual		NEG	▲ 1.0	1.0
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	43.79	44.6	43.6
SAMPLE IMAGES		method	limit/base	current	history1	history2

Color



Bottom

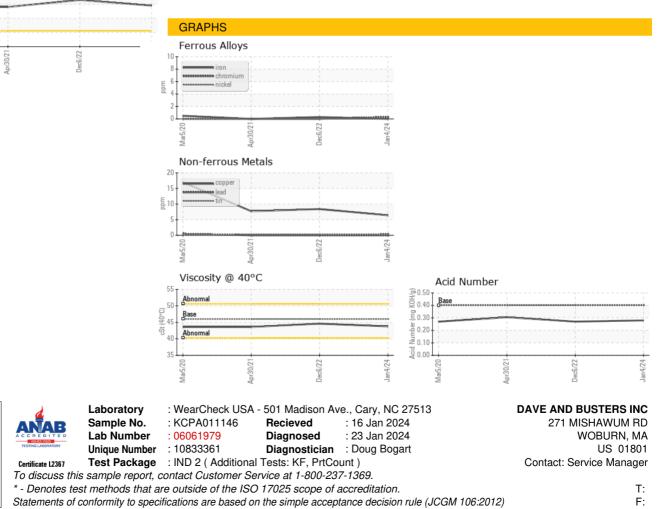

Contact/Location: Service Manager - DAVWOB