


OIL ANALYSIS REPORT

ATLAS COPCO ROTO XTEND [664659] ATLAS COPCO WUX584463 - UNITEC CONSTRUCTION & FORESTRY

Component

Compressor





Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| SAMPLE INFORM | /ATION | method | limit/base | current | history1 | history2 |
|------------------|----------|-------------|------------|-------------|----------|----------|
| Sample Number | | Client Info | | UCH06062102 | | |
| Sample Date | | Client Info | | 18 Dec 2023 | | |
| Machine Age | hrs | Client Info | | 6296 | | |
| Oil Age | hrs | Client Info | | 1000 | | |
| Oil Changed | | Client Info | | Changed | | |
| Sample Status | | | | NORMAL | | |
| CONTAMINATIO | V | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.1 | NEG | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | 0 | | |
| Chromium | ppm | ASTM D5185m | >5 | 0 | | |
| Nickel | ppm | ASTM D5185m | | 0 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >15 | <1 | | |
| Lead | ppm | ASTM D5185m | >65 | 0 | | |
| Copper | ppm | ASTM D5185m | >65 | 3 | | |
| Tin | ppm | ASTM D5185m | >10 | 0 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | 0 | | |
| Molybdenum | ppm | ASTM D5185m | | 0 | | |
| Manganese | ppm | ASTM D5185m | | <1 | | |
| Magnesium | ppm | ASTM D5185m | | 1 | | |
| Calcium | ppm | ASTM D5185m | | <1 | | |
| Phosphorus | ppm | ASTM D5185m | | 94 | | |
| Zinc | ppm | ASTM D5185m | | 162 | | |
| Sulfur | ppm | ASTM D5185m | | 360 | | |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >35 | <1 | | |
| Sodium | ppm | ASTM D5185m | | <1 | | |
| Potassium | ppm | ASTM D5185m | >20 | 0 | | |
| FLUID DEGRADA | ATION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.14 | 0.19 | | |



OIL ANALYSIS REPORT

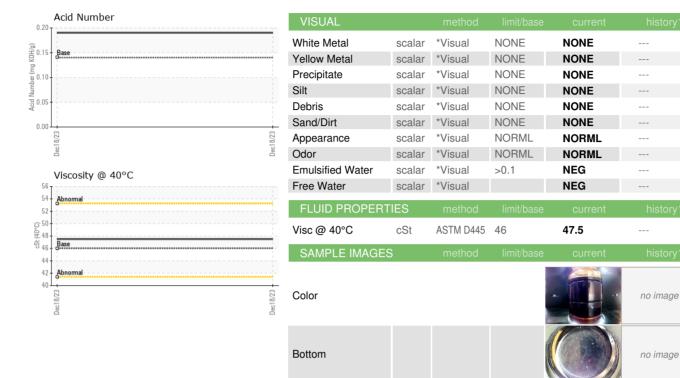

GRAPHS Ferrous Alloys

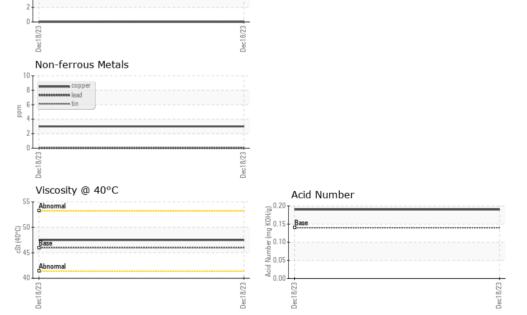





Certificate L2367

Laboratory Sample No. Lab Number Unique Number

: UCH06062102 : 06062102 : 10833484 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 16 Jan 2024 Recieved Diagnosed : 18 Jan 2024 : Don Baldridge Diagnostician

D.L. THURROTT AIR PRODUCTS

84 EASTERN AVE WATERVILLE, ME US 04901

no image

no image

Contact: ROBERT TOWNE

rtowne@inscogroup.com

T:

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: