




OIL ANALYSIS REPORT

Sample Rating Trend

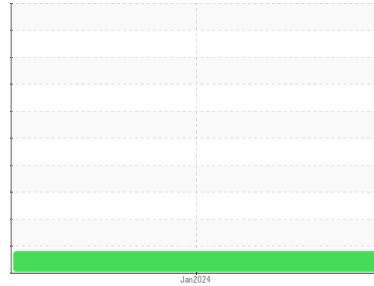

WEAR



Machine Id
4RE103834
 Component
Diesel Engine
 Fluid
HENNESSEY (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

The lead level is abnormal. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0843374	---	---
Sample Date	Client Info		02 Jan 2024	---	---
Machine Age	mths	Client Info	0	---	---
Oil Age	mths	Client Info	12	---	---
Oil Changed	Client Info		Not Changed	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	13	---
Chromium	ppm	ASTM D5185m	>20	<1	---
Nickel	ppm	ASTM D5185m	>2	0	---
Titanium	ppm	ASTM D5185m	>2	0	---
Silver	ppm	ASTM D5185m	>2	0	---
Aluminum	ppm	ASTM D5185m	>30	3	---
Lead	ppm	ASTM D5185m	>30	▲ 50	---
Copper	ppm	ASTM D5185m	>30	3	---
Tin	ppm	ASTM D5185m	>15	1	---
Vanadium	ppm	ASTM D5185m		0	---
Cadmium	ppm	ASTM D5185m		0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	---
Barium	ppm	ASTM D5185m		0	---
Molybdenum	ppm	ASTM D5185m		93	---
Manganese	ppm	ASTM D5185m		<1	---
Magnesium	ppm	ASTM D5185m		20	---
Calcium	ppm	ASTM D5185m		3835	---
Phosphorus	ppm	ASTM D5185m		996	---
Zinc	ppm	ASTM D5185m		1148	---
Sulfur	ppm	ASTM D5185m		3987	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	14	---
Sodium	ppm	ASTM D5185m		<1	---
Potassium	ppm	ASTM D5185m	>20	<1	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.8	---
Nitration	Abs/cm	*ASTM D7624	>20	12.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	40.1	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	38.5	---
Acid Number (AN)	mg KOH/g	ASTM D8045		2.01	---
Base Number (BN)	mg KOH/g	ASTM D2896		10.99	---




OIL ANALYSIS REPORT

▲ Non-ferrous Metals




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

Acid Number

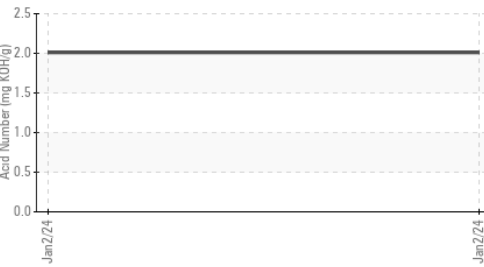


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.3	---	---

Base Number

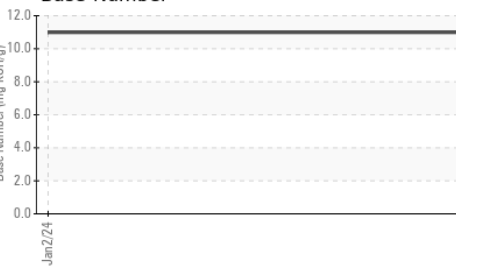


GRAPHS


Iron (ppm)

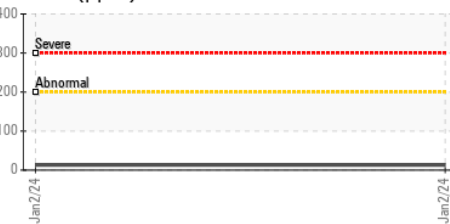


▲ Lead (ppm)

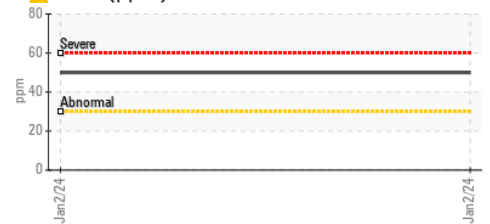

Aluminum (ppm)

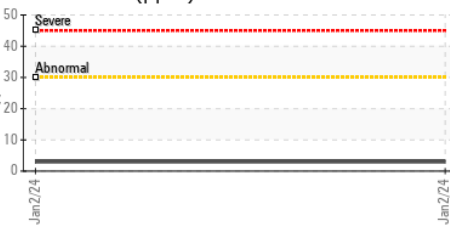


Chromium (ppm)

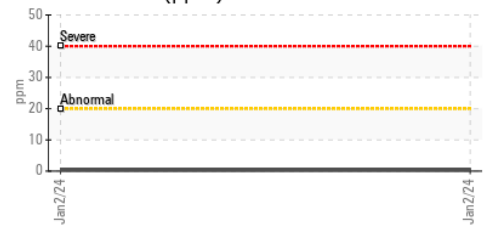


Copper (ppm)




Silicon (ppm)

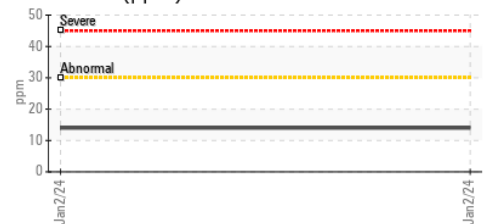

Viscosity @ 100°C

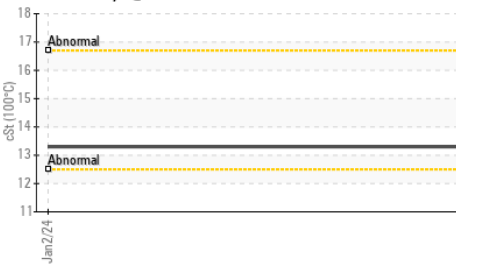

Viscosity @ 100°C

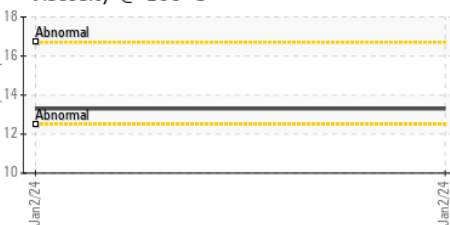

Base Number



Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0843374 **Received** : 16 Jan 2024
Lab Number : 06062160 **Diagnosed** : 18 Jan 2024
Unique Number : 10833542 **Diagnostician** : Don Baldrige
Test Package : MOB 2

PARKE CO FIREWOOD
 4121 N 100 E
 MARSHALL, IN
 US 47859

Contact: ELAM SWAREY JR
 cealey@cebridge.net

T: (765)597-2237

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)