




# OIL ANALYSIS REPORT

Sample Rating Trend

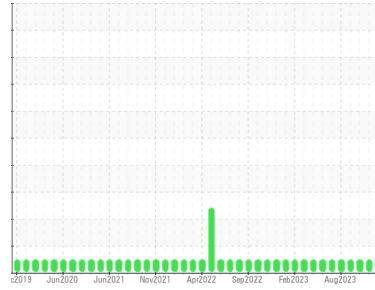

VIS DEBRIS



Area  
**CRAIG E PHILIP**  
 Machine Id  
**[CRAIG E PHILIP] 003 565024-3**  
 Component  
**Starboard Main Engine**  
 Fluid  
**CHEVRON DELO 710 LE (142 GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Moderate concentration of visible dirt/debris present in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>MW0064590</b>	MW0060313	MW0060306
Sample Date	Client Info		<b>01 Jan 2024</b>	31 Oct 2023	01 Oct 2023
Machine Age	hrs	Client Info	<b>22523</b>	21037	20386
Oil Age	hrs	Client Info	<b>6420</b>	21037	20386
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>4</b>	7	8
Chromium	ppm	ASTM D5185m >8	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >15	<b>2</b>	2	2
Lead	ppm	ASTM D5185m >18	<b>2</b>	3	3
Copper	ppm	ASTM D5185m >80	<b>10</b>	12	6
Tin	ppm	ASTM D5185m >14	<b>1</b>	2	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>33</b>	39	40
Barium	ppm	ASTM D5185m	<b>0</b>	0	3
Molybdenum	ppm	ASTM D5185m	<b>44</b>	44	45
Manganese	ppm	ASTM D5185m	<b>2</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>14</b>	12	13
Calcium	ppm	ASTM D5185m	<b>3205</b>	3454	3345
Phosphorus	ppm	ASTM D5185m	<b>3</b>	2	3
Zinc	ppm	ASTM D5185m 10	<b>8</b>	0	9
Sulfur	ppm	ASTM D5185m	<b>2057</b>	2375	2328

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>10</b>	6	6
Sodium	ppm	ASTM D5185m >75	<b>&lt;1</b>	4	5
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	3

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.4</b>	7.7	7.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>15.1</b>	15.3	14.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>8.1</b>	8.4	7.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.2	<b>9.80</b>	9.38	9.60







# OIL ANALYSIS REPORT

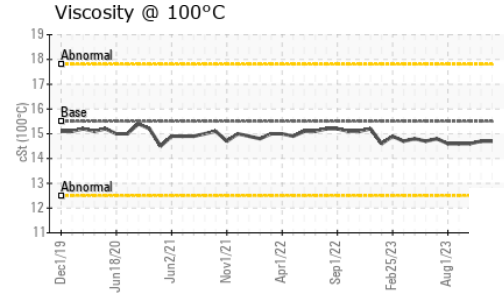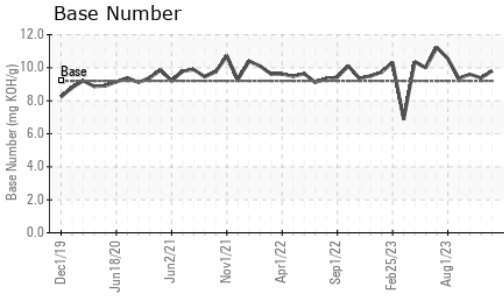

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Debris	scalar	*Visual	NONE	<b>▲ MODER</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.5	<b>14.7</b>	14.7

### GRAPHS

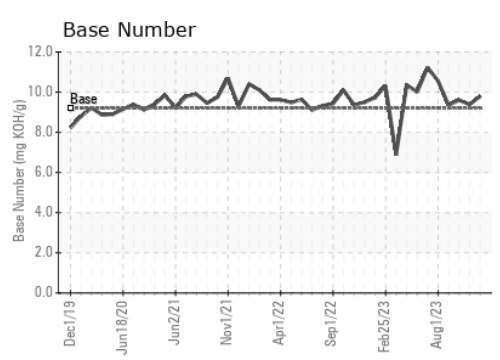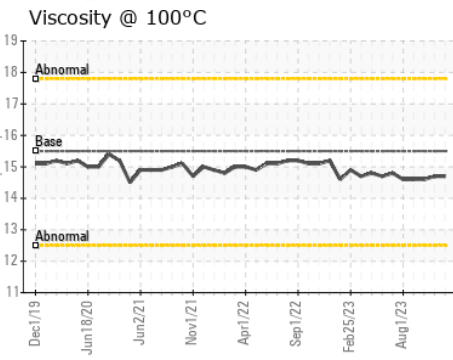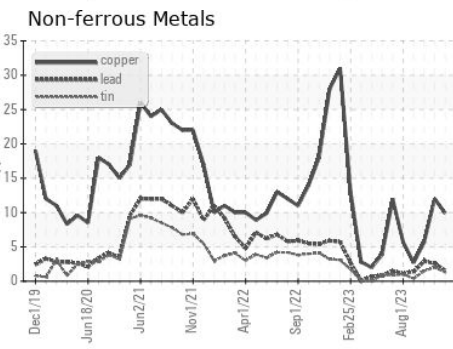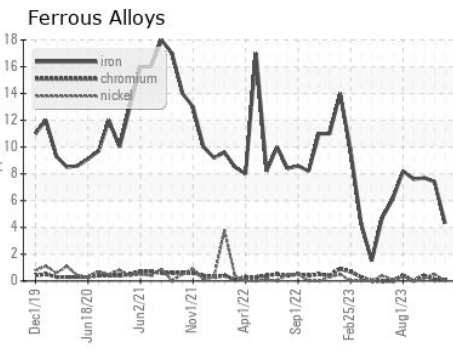

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0064590 **Recieved** : 16 Jan 2024  
**Lab Number** : **06062177** **Diagnosed** : 18 Jan 2024  
**Unique Number** : 10833559 **Diagnostician** : Don Baldrige  
**Test Package** : MAR 2

**INGRAM BARGE**  
 900 S 3RD ST  
 PADUCAH, KY  
 US 42003  
 Contact: ANTHONY VAN CURA  
 anthony.vancura@ingrambarga.com  
 T: (270)415-4467  
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)