



OIL ANALYSIS REPORT

Sample Rating Trend

DEGRADATION

Area
CARS
 Machine Id
CARS12DEC23-240
 Component
Gearbox
 Fluid
XPDC 038 (--- QTS)



DIAGNOSIS

Recommendation

The oil is near the end of its useful service life, recommend schedule an oil change. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is at the top-end of the recommended limit.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0685909	---	---
Sample Date	Client Info	09 Jan 2024	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>200	<1	---	---
Chromium ppm ASTM D5185m	>10	0	---	---
Nickel ppm ASTM D5185m	>10	0	---	---
Titanium ppm ASTM D5185m		0	---	---
Silver ppm ASTM D5185m		0	---	---
Aluminum ppm ASTM D5185m	>25	1	---	---
Lead ppm ASTM D5185m	>50	0	---	---
Copper ppm ASTM D5185m	>200	0	---	---
Tin ppm ASTM D5185m	>10	0	---	---
Vanadium ppm ASTM D5185m		0	---	---
Cadmium ppm ASTM D5185m		0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		288	---	---
Barium ppm ASTM D5185m		0	---	---
Molybdenum ppm ASTM D5185m		0	---	---
Manganese ppm ASTM D5185m		0	---	---
Magnesium ppm ASTM D5185m		<1	---	---
Calcium ppm ASTM D5185m		53	---	---
Phosphorus ppm ASTM D5185m		1382	---	---
Zinc ppm ASTM D5185m		0	---	---
Sulfur ppm ASTM D5185m		360	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>50	<1	---	---
Sodium ppm ASTM D5185m		<1	---	---
Potassium ppm ASTM D5185m	>20	<1	---	---
Water % ASTM D6304	>0.2	0.094	---	---
ppm Water ppm ASTM D6304	>2000	945	---	---

FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>20000	999	---	---
Particles >6µm ASTM D7647	>5000	250	---	---
Particles >14µm ASTM D7647	>640	14	---	---
Particles >21µm ASTM D7647	>160	3	---	---
Particles >38µm ASTM D7647	>40	0	---	---
Particles >71µm ASTM D7647	>10	0	---	---
Oil Cleanliness ISO 4406 (c)	>21/19/16	17/15/11	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045		▲ 4.90	---	---



OIL ANALYSIS REPORT

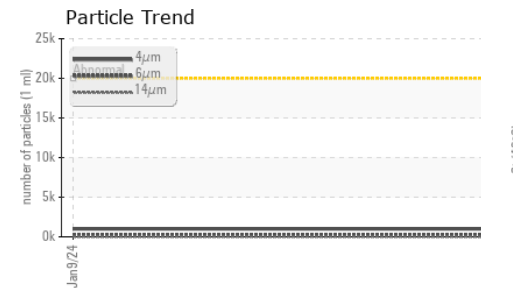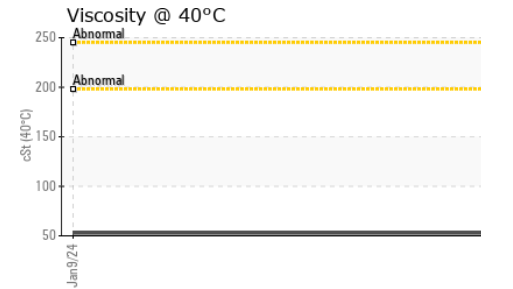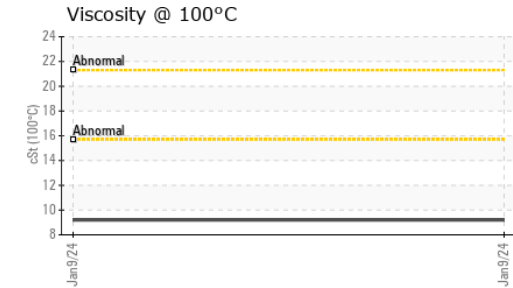
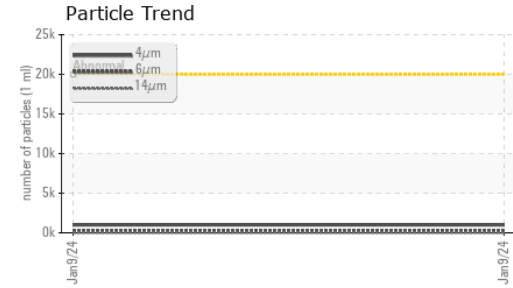
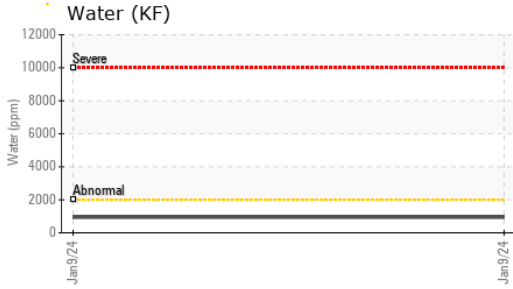


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	52.8	---	---
Visc @ 100°C	cSt	ASTM D445	9.2	---	---
Viscosity Index (VI)	Scale	ASTM D2270	157	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

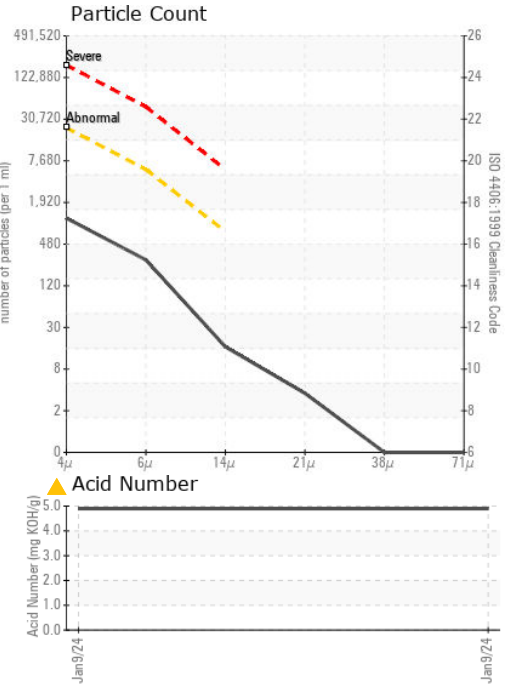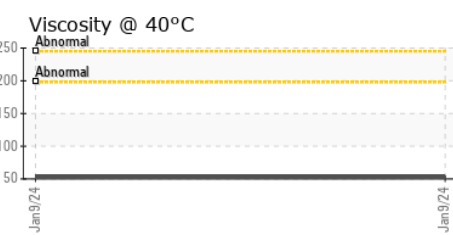

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0685909 **Recieved** : 17 Jan 2024
Lab Number : 06062658 **Diagnosed** : 19 Jan 2024
Unique Number : 10834040 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

COMPLIANCE and RESEARCH SERVICES
 1701 WEST FRONT ST
 PLAINFIELD, NJ
 US 07063
 Contact: MATT LARKIN
 blending@complianceandresearch.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: