


Area
Paper Cup Machines
 Machine Id
PMC 1001 POS-123 (S/N 50296)
 Component
Circulating System
 Fluid
SUMMIT Syngear SH-1032 320 (85 GAL)

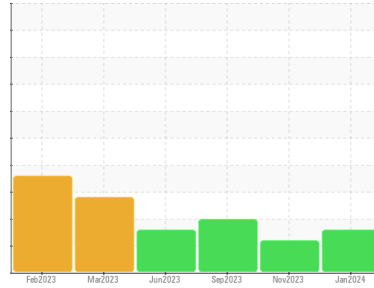

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			TO50001940	TO50001967	TO50001718
Sample Date	Client Info			11 Jan 2024	21 Nov 2023	07 Sep 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				ABNORMAL	ATTENTION	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		15	13	18
Iron	ppm	ASTM D5185m		5	5	5
Chromium	ppm	ASTM D5185m		0	<1	0
Nickel	ppm	ASTM D5185m		<1	1	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		1	2	0
Lead	ppm	ASTM D5185m		0	<1	<1
Copper	ppm	ASTM D5185m		1	2	<1
Tin	ppm	ASTM D5185m		0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	<1	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		54	97	86
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		0	1	2
Calcium	ppm	ASTM D5185m		4	33	2
Phosphorus	ppm	ASTM D5185m		523	542	494
Zinc	ppm	ASTM D5185m		0	6	0
Sulfur	ppm	ASTM D5185m		6553	6504	7485


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		802	998	901
Sodium	ppm	ASTM D5185m		1	<1	1
Potassium	ppm	ASTM D5185m	>20	<1	1	<1
Water	%	ASTM D6304		0.021	0.260	0.008
ppm Water	ppm	ASTM D6304		219	2600	83.5

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>1300	▲ 25008	▲ 2399	▲ 12186
Particles >6µm		ASTM D7647	>320	▲ 6064	▲ 325	▲ 1770
Particles >14µm		ASTM D7647	>80	▲ 106	21	52
Particles >21µm		ASTM D7647	>20	20	8	12
Particles >38µm		ASTM D7647	>4	2	3	4
Particles >71µm		ASTM D7647	>3	1	0	0
Oil Cleanliness		ISO 4406 (c)	>17/15/13	▲ 22/20/14	▲ 18/16/12	▲ 21/18/13


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.68	0.69	0.70

OIL ANALYSIS REPORT


▲ Particle Trend

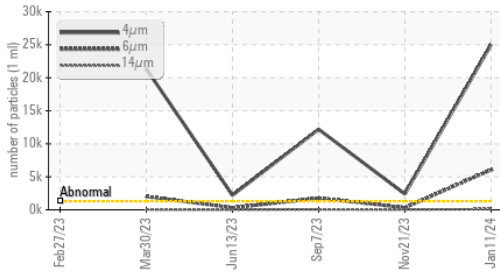


Water (KF)

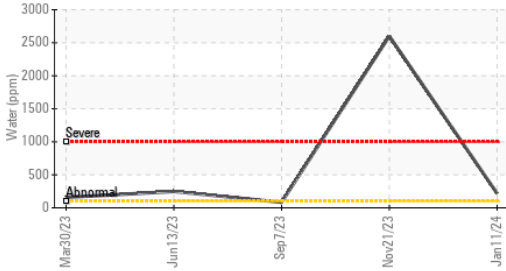


PQ

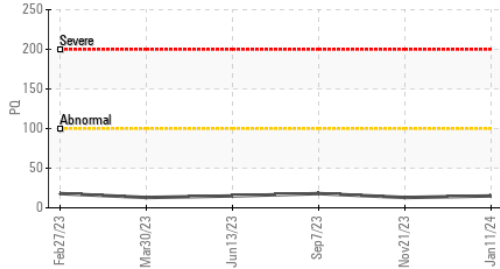

Viscosity @ 100°C

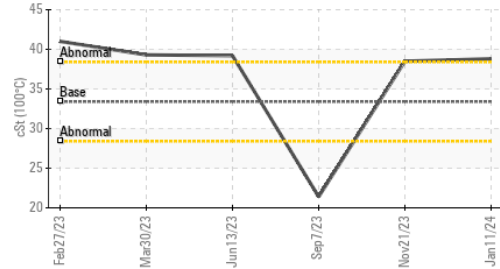

Viscosity @ 40°C

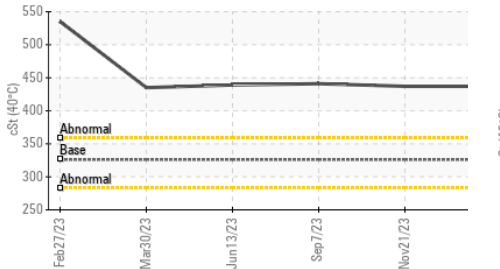

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	NEG	▲ 0.2%	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	326	437	▲ 441
Visc @ 100°C	cSt	ASTM D445	33.4	38.8	▲ 21.4
Viscosity Index (VI)	Scale	ASTM D2270	145	133	38

SAMPLE IMAGES

Color




Bottom




GRAPHS


Ferrous Alloys

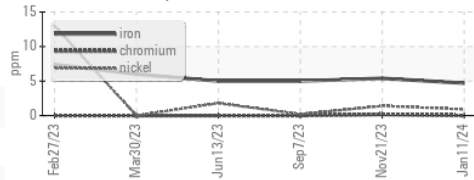


Non-ferrous Metals

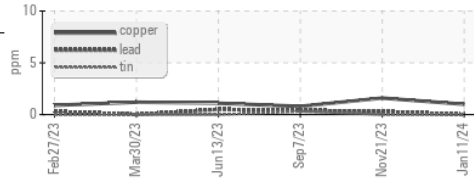


Viscosity @ 40°C

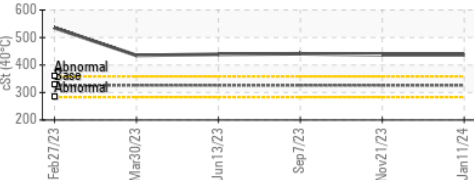

▲ Particle Count

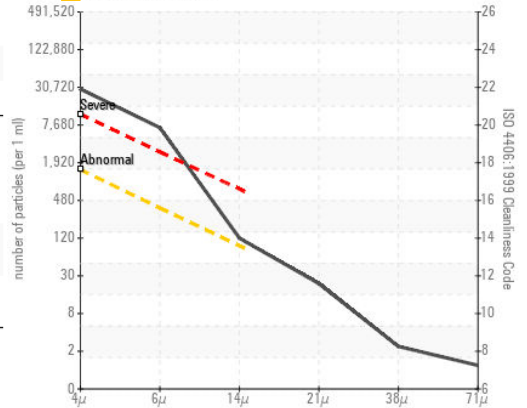

Acid Number

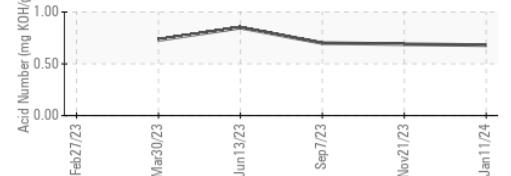

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO50001940 **Received** : 17 Jan 2024
Lab Number : 06062665 **Diagnosed** : 19 Jan 2024
Unique Number : 10834047 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, KV100, PQ, PrtCount, VI)

DART CONTAINER CORPORATION
 4444 W LEADBETTER DR
 DALLAS, TX
 US 75236
 Contact: YON PALOMINO
 yon.palomino@dart.biz
 T: (214)775-5673
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)