


OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY

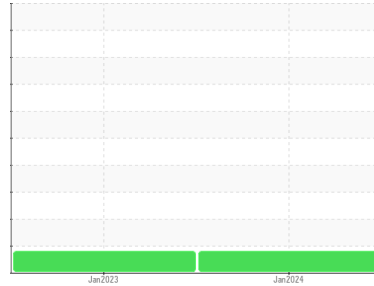

Area
Paper Cup Machines
 Machine Id
Baler 4
 Component
Gear Motor
 Fluid
CONOCO MEGAFLOW AW 32 (4 GAL)

DIAGNOSIS

- Recommendation**
Resample at the next service interval to monitor.
- Wear**
All component wear rates are normal.
- Contamination**
There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.
- Fluid Condition**
Viscosity of sample indicates oil is within ISO 46 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	TO50001544	TO50001455	---
Sample Date	Client Info	11 Jan 2024	02 Jan 2023	---
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	---
Sample Status		ATTENTION	ATTENTION	---

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >4.0	<1.0	<1.0	---
Glycol	WC Method	NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184	14	9	---
Iron	ppm ASTM D5185m >30	3	3	---
Chromium	ppm ASTM D5185m >10	0	0	---
Nickel	ppm ASTM D5185m >5	0	0	---
Titanium	ppm ASTM D5185m	0	0	---
Silver	ppm ASTM D5185m >5	0	0	---
Aluminum	ppm ASTM D5185m >20	1	0	---
Lead	ppm ASTM D5185m >10	0	0	---
Copper	ppm ASTM D5185m >25	1	<1	---
Tin	ppm ASTM D5185m >5	0	0	---
Vanadium	ppm ASTM D5185m	0	0	---
Cadmium	ppm ASTM D5185m	0	0	---

ADDITIVES


method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<1	0	---
Barium	ppm ASTM D5185m 0	0	0	---
Molybdenum	ppm ASTM D5185m 0	0	0	---
Manganese	ppm ASTM D5185m	0	0	---
Magnesium	ppm ASTM D5185m 0	61	73	---
Calcium	ppm ASTM D5185m 80	73	73	---
Phosphorus	ppm ASTM D5185m 365	340	359	---
Zinc	ppm ASTM D5185m 500	307	355	---
Sulfur	ppm ASTM D5185m 1000	1469	1838	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	5	2	---
Sodium	ppm ASTM D5185m	0	0	---
Potassium	ppm ASTM D5185m >20	<1	<1	---
Water	% ASTM D6304 >0.1	0.007	---	---
ppm Water	ppm ASTM D6304 >1000	71	---	---

OIL ANALYSIS REPORT

▲ Viscosity @ 40°C

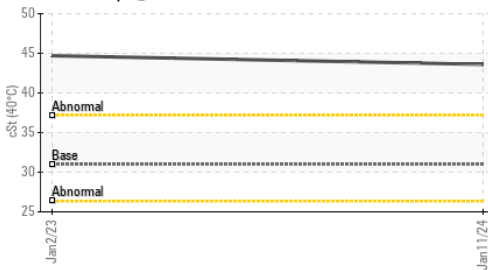

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	2233	---	---
Particles >6µm	ASTM D7647	>5000	529	---	---
Particles >14µm	ASTM D7647	>640	48	---	---
Particles >21µm	ASTM D7647	>160	14	---	---
Particles >38µm	ASTM D7647	>40	1	---	---
Particles >71µm	ASTM D7647	>10	0	---	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	18/16/13	---	---


FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.38	0.35	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	31.0	▲ 43.6	▲ 44.7
Visc @ 100°C	cSt	ASTM D445	5.4	▲ 6.9	▲ 6.9
Viscosity Index (VI)	Scale	ASTM D2270	104	115	110

GRAPHS


Water (KF)

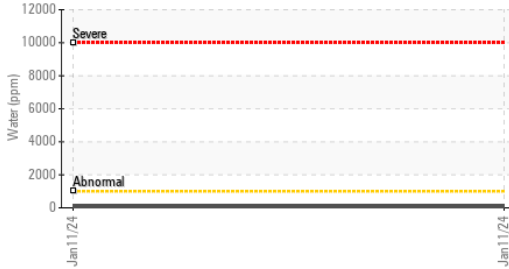


PQ

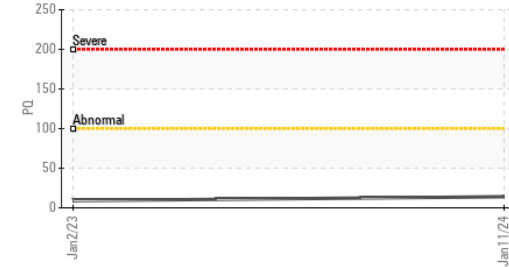


Particle Trend

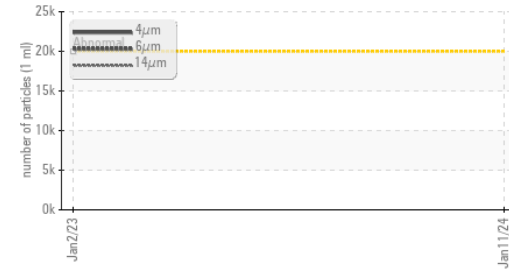

Water (KF)

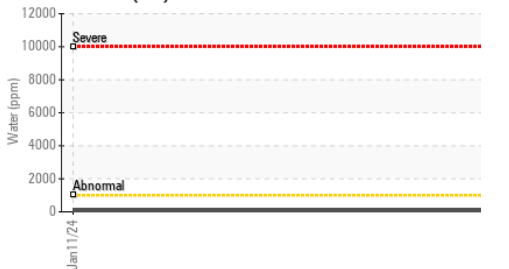

Ferrous Alloys

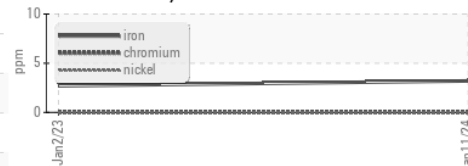


Non-ferrous Metals



▲ Viscosity @ 100°C



Particle Count

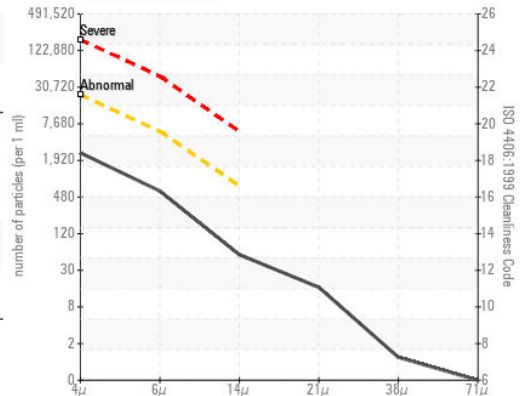

Acid Number



Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO50001544 **Received** : 17 Jan 2024
Lab Number : **06062667** **Diagnosed** : 19 Jan 2024
Unique Number : 10834049 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, KV40, PQ, PrtCount, VI)

DART CONTAINER CORPORATION
 4444 W LEADBETTER DR
 DALLAS, TX
 US 75236
 Contact: YON PALOMINO
 yon.palomino@dart.biz
 T: (214)775-5673
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)