


Area
Paper Cup Machines
 Machine Id
PMC 1003 POS-226 (S/N 150609)
 Component
Circulating System
 Fluid
SUMMIT Syngear SH-1032 320 (85 GAL)

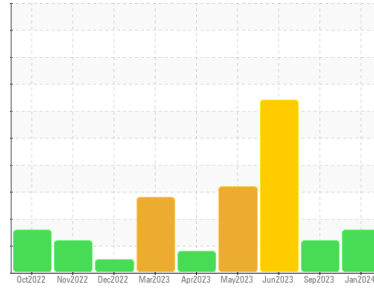

DIAGNOSIS

Recommendation
 We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear
 All component wear rates are normal.

Contamination
 There is a moderate amount of visible silt present in the sample.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		TO50001944	TO50001724	TO50001687
Sample Date	Client Info		11 Jan 2024	07 Sep 2023	11 Jun 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS	method	limit/base	current	history1	history2
PQ	ASTM D8184		13	14	19
Iron	ppm	ASTM D5185m	8	11	9
Chromium	ppm	ASTM D5185m	0	0	0
Nickel	ppm	ASTM D5185m	6	0	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m	1	0	<1
Lead	ppm	ASTM D5185m	0	<1	0
Copper	ppm	ASTM D5185m	5	6	6
Tin	ppm	ASTM D5185m	<1	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0






ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	31	35	45
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m	<1	2	<1
Calcium	ppm	ASTM D5185m	2	2	2
Phosphorus	ppm	ASTM D5185m	409	453	469
Zinc	ppm	ASTM D5185m	0	0	0
Sulfur	ppm	ASTM D5185m	4909	6593	7171

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	4291	3491	6426
Sodium	ppm	ASTM D5185m	<1	1	<1
Potassium	ppm	ASTM D5185m	<1	<1	<1
Water	%	ASTM D6304	0.010	0.011	▲ 0.136
ppm Water	ppm	ASTM D6304	101	114.2	▲ 1360

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>1300	---	---	▲ 96921
Particles >6µm	ASTM D7647	>320	---	---	▲ 14893
Particles >14µm	ASTM D7647	>80	---	---	▲ 93
Particles >21µm	ASTM D7647	>20	---	---	11
Particles >38µm	ASTM D7647	>4	---	---	1
Particles >71µm	ASTM D7647	>3	---	---	0
Oil Cleanliness	ISO 4406 (c)	>17/15/13	---	---	▲ 24/21/14

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.55	0.62	0.58


OIL ANALYSIS REPORT

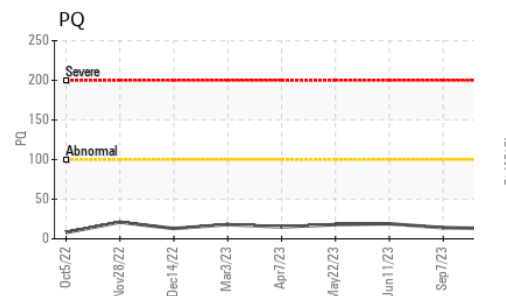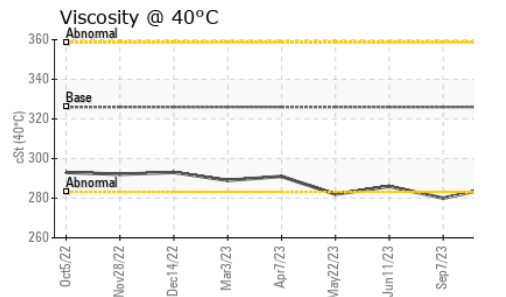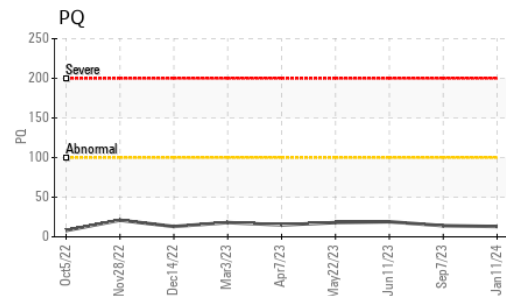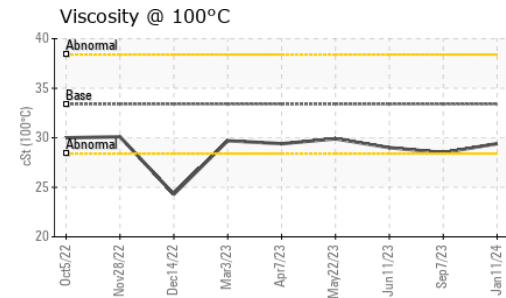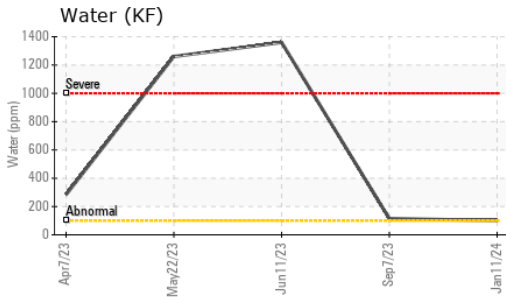





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	▲ MODER	▲ MODER	▲ MODER
Debris	scalar	*Visual	NONE	▲ HEAVY	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	▲ HAZY	NORML	▲ HAZY
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	NEG	NEG	▲ 0.2%
Free Water	scalar	*Visual	NEG	NEG	▲ 1.0

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	326	286	280
Visc @ 100°C	cSt	ASTM D445	33.4	29.4	28.5
Viscosity Index (VI)	Scale	ASTM D2270	145	138	135

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

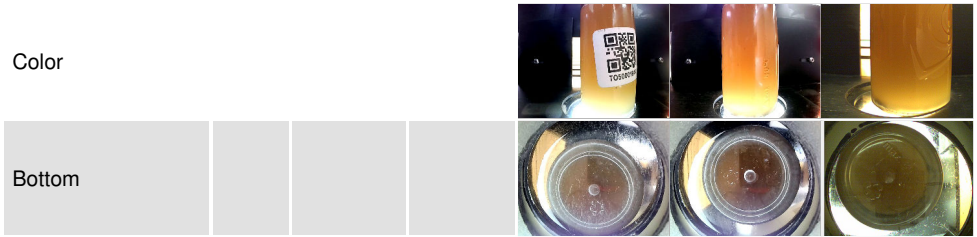

GRAPHS

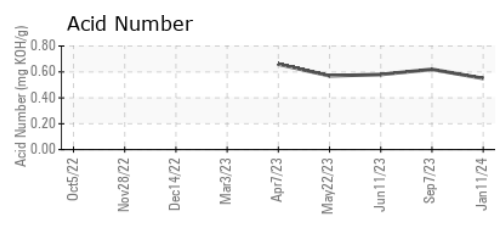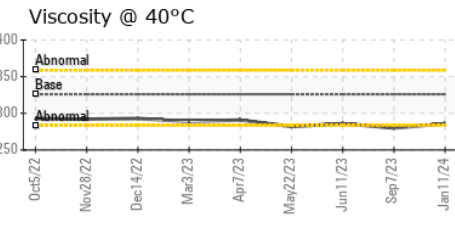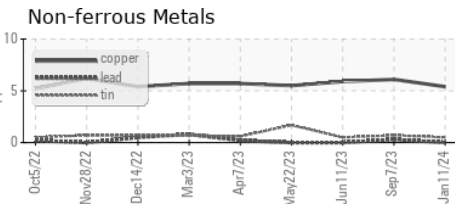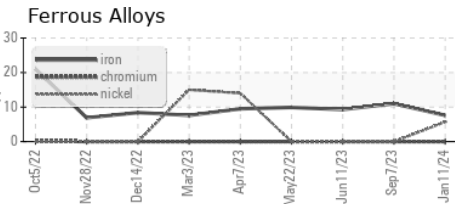

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO50001944 **Received** : 17 Jan 2024
Lab Number : 06062671 **Diagnosed** : 19 Jan 2024
Unique Number : 10834053 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, KV100, PQ, PrtCount, VI)

DART CONTAINER CORPORATION
 4444 W LEADBETTER DR
 DALLAS, TX
 US 75236
 Contact: YON PALOMINO
 yon.palomino@dart.biz
 T: (214)775-5673
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)