

# **OIL ANALYSIS REPORT**

### Sample Rating Trend

**NORMAL** 



# East Molding 556 (S/N 2047429)

**Hydraulic System** 

HYDRAULIC OIL ISO 46 (430 GAL)

riuiu				
AW	HYD	RAL	JLIC	OI

## DIAGNOSIS Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Aug2016 Juli	017 Jun2018 May2019	Jun2020 May2021 Dec2022	Jun2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		RP0035826	RP0034735	RP0026025
Sample Date		Client Info		11 Jan 2024	28 Jun 2023	23 May 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	4	4	6
Chromium	ppm	ASTM D5185m	>20	<1	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>20	2	0	1
Lead	ppm	ASTM D5185m	>20	9	12	16
Copper	ppm	ASTM D5185m	>20	12	14	17
Tin	ppm	ASTM D5185m	>20	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	0
Barium	ppm	ASTM D5185m	5	3	0	0
Molybdenum	ppm	ASTM D5185m	5	<1	<1	2
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	25	4	5	6
Calcium	ppm	ASTM D5185m	200	43	44	44
Phosphorus	ppm	ASTM D5185m	300	379	365	347
Zinc	ppm	ASTM D5185m	370	357	394	384
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	<1	<1
Sodium	ppm	ASTM D5185m		<1	3	4
Potassium	ppm	ASTM D5185m	>20	2	<1	<1
Water	%	ASTM D6304	>0.05	0.003	0.006	0.009
ppm Water	ppm	ASTM D6304	>500	31	62.7	94.5
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	2185	1301	
Particles >6µm		ASTM D7647	>1300	324	302	
Particles >14µm		ASTM D7647	>160	11	15	
Particles >21µm		ASTM D7647	>40	3	4	
Particles >38μm		ASTM D7647	>10	0	0	
Particles >71μm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/16/11	18/15/11	
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.43	0.40	0.41



## **OIL ANALYSIS REPORT**

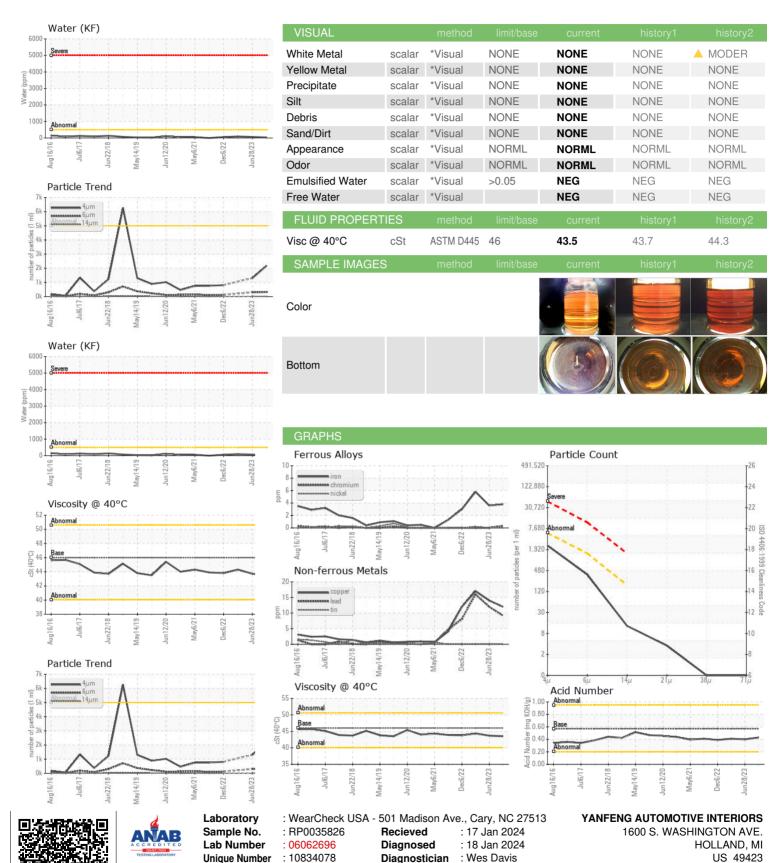

Certificate L2367

Test Package

: IND 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: JEFF HARRIS

T: (616)915-4443

F: (616)394-1725

jeffrey.harris@yanfeng.com