

## **OIL ANALYSIS REPORT**

Sample Rating Trend



KAESER SK 19 1842007 (S/N 1171)

Compressor Fluid

{not provided} (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of particulates present in the oil.


#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC06062724		
Sample Date		Client Info		02 Jan 2024		
Machine Age	hrs	Client Info		29210		
Oil Age	hrs	Client Info		0		
Oil Changed	1113	Client Info		N/A		
Sample Status				ATTENTION		
			1. 1. //	-		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	14		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		<1		
Phosphorus	ppm	ASTM D5185m		224		
Zinc	ppm	ASTM D5185m		2		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.05	0.004		
ppm Water	ppm	ASTM D6304	>500	42		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		3016		
Particles >6µm		ASTM D7647	>1300	862		
Particles >14µm		ASTM D7647	>80	<b>88</b>		
Particles >21µm		ASTM D7647	>20	<b>a</b> 25		
Particles >38µm		ASTM D7647	>4	2		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>19/17/14</b>		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.18		



### Built for a lifetime.





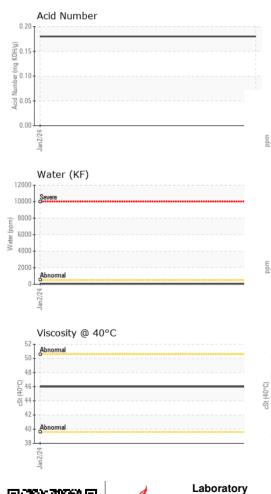

# **OIL ANALYSIS REPORT**

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	LIGHT		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		46.0		
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image
Ferrous Alloys			491,520 122,880 30,720 7,680			-24 -22 -20 -18 106
Non-ferrous Meta	ls		480 480 480 120 480 120 120 30 8			-18 (10) (14) (16) (14) (14) (14) (14) (14) (14) (14) (14
Jan2/24			Jan2/24			
Viscosity @ 40°C			٦ C	Acid Number	14μ 21μ	38µ 71µ
Abnormal			0.20 0.15 0.15 0.10 0.00 0.00 Vmps 0.00 Vmps 0.00 Vmps			
Jan 2/24 -			Jan2/24	Jan 2/24		Jan2/24 -
06062724	501 Madi Recieved Diagnos Diagnos	d:17. ed:19.	ry, NC 27513 Jan 2024 Jan 2024 Ig Bogart	3 NORTH I		EDICAL CENTER SPRING ST NE NESVILLE, GA US 30501 Contact:

**Test Package** To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F:

Certificate L2367

Sample No. Lab Number **Unique Number** 

> Contact/Location: ? ? - NORGAIGA Page 2 of 2