

## **OIL ANALYSIS REPORT**

Sample Rating Trend



Machino Id

# KAESER SK 15T 6584597 (S/N 1116)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of particulates present in the oil.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Nov202	0 Oct2021	0ct2022 D	ac2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC06062729	KC05694108	KC95339
Sample Date		Client Info		18 Dec 2023	25 Oct 2022	27 Oct 2021
Machine Age	hrs	Client Info		10542	7396	4504
Oil Age	hrs	Client Info		0	3748	2123
Oil Changed		Client Info		N/A	N/A	Changed
Sample Status				ATTENTION	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	<1
Aluminum	ppm	ASTM D5185m	>10	0	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	12	14	8
Tin	ppm	ASTM D5185m	>10	0	0	<1
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	21
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	90	22	25	49
Calcium	ppm	ASTM D5185m	2	<1	0	1
Phosphorus	ppm	ASTM D5185m		0	2	0
Zinc	ppm	ASTM D5185m		34	28	16
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	<1
Sodium	ppm	ASTM D5185m		7	15	19
Potassium	ppm	ASTM D5185m	>20	0	1	3
Water	%	ASTM D6304	>0.05	0.006	0.021	0.021
ppm Water	ppm	ASTM D6304	>500	67	214.0	219.9
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4165	5220	27768
Particles >6µm		ASTM D7647	>1300	<b>1498</b>	<u>▲</u> 1735	<u>▲</u> 4131
Particles >14μm		ASTM D7647	>80	<b>110</b>	<u>^</u> 216	<b>▲</b> 102
Particles >21µm		ASTM D7647	>20	<b>2</b> 6	<u>^</u> 71	<b>2</b> 9
Particles >38µm		ASTM D7647	>4	1	<u>\$</u> 5	2
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>1</b> 9/18/14	<u>^</u> 20/18/15	<b>▲</b> 19/14
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	ma KOU/~	VCTM DOUVE	0.4	0.25	0.22	0.242

Acid Number (AN)

mg KOH/g ASTM D8045 0.4


0.32

0.35

0.342



### **OIL ANALYSIS REPORT**

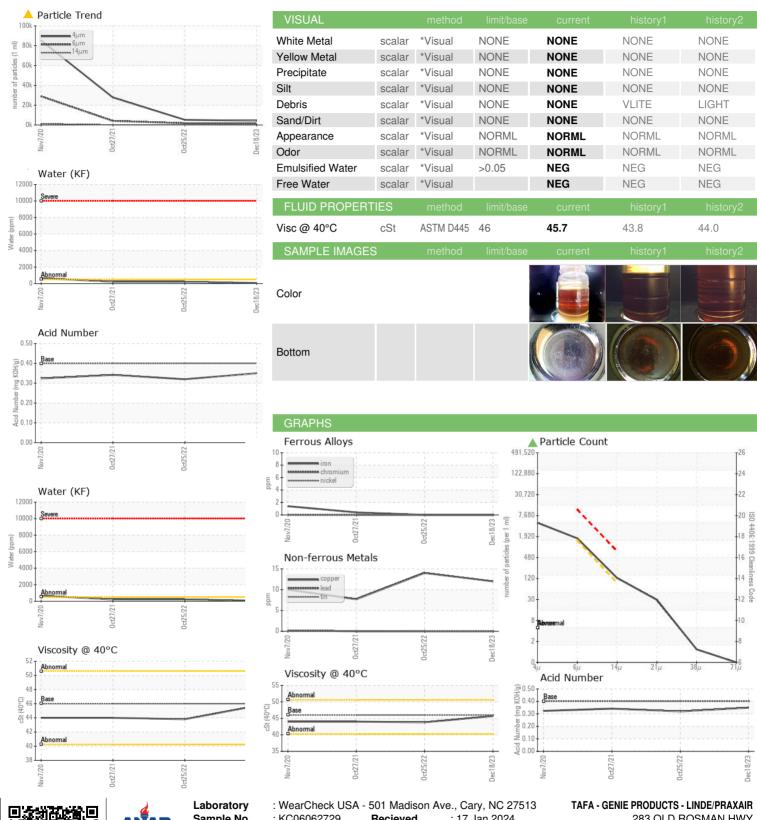



Certificate L2367

Sample No. Lab Number **Unique Number** 

: KC06062729

: 06062729 : 10834111 Test Package : IND 2

Recieved : 17 Jan 2024 Diagnosed : 19 Jan 2024 Diagnostician

: Doug Bogart

283 OLD ROSMAN HWY

BREVARD, NC US 28712

Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: