

### **OIL ANALYSIS REPORT**

# KAESER SK 15 8756081 (S/N 2042)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

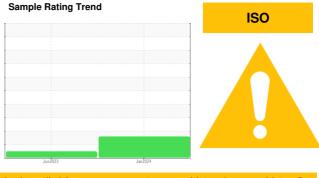



SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		KC06062740	KC05883352	
Sample Date		Client Info		02 Jan 2024	21 Jun 2023	
Machine Age	hrs	Client Info		5622	2998	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				ABNORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	<1	0	
Lead	ppm	ASTM D5185m	>10	0	<1	
Copper	ppm	ASTM D5185m	>50	7	7	
Tin	ppm	ASTM D5185m	>10	0	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m	90	24	<1	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m	90	40	24	
Calcium	ppm	ASTM D5185m	2	2	0	
Phosphorus	ppm	ASTM D5185m		0	0	
Zinc	ppm	ASTM D5185m		9	14	
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	
Sodium	ppm	ASTM D5185m		14	<1	
Potassium	ppm	ASTM D5185m	>20	1	2	
Water	%	ASTM D6304	>0.05	0.006	0.015	
ppm Water	ppm	ASTM D6304	>500	68	159.6	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		10274	2023	
Particles >6µm		ASTM D7647	>1300	<u> </u>	724	
Particles >14µm		ASTM D7647	>80	<b>196</b>	69	
Particles >21µm		ASTM D7647	>20	<u> </u>	16	
Particles >38µm		ASTM D7647	>4	1	1	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 21/19/15	18/17/13	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.34	0.32	




Built for a lifetime."

## **OIL ANALYSIS REPORT**

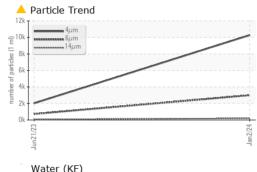

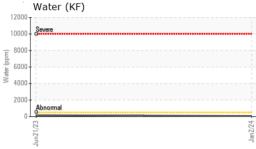

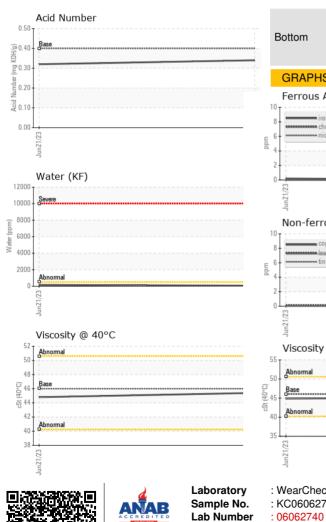

VISUAL		method	limit/base	current	history1	history2
Vhite Metal	scalar	*Visual	NONE	NONE	NONE	
ellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	LIGHT	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
ppearance	scalar	*Visual	NORML	NORML	NORML	
Ddor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	
Free Water	scalar	*Visual	20.00	NEG	NEG	
FLUID PROPERT	IES	method	limit/base	current	history1	history2
/isc @ 40°C	cSt	ASTM D445		45.4	44.8	
SAMPLE IMAGES	5	method	limit/base	current	history1	history2
Color				a		no image
				Contraction of the second seco		
			1			
Bottom						no image
GRAPHS						
Ferrous Alloys				Particle Coun	t	
			491,520	I an alone occur	-	T <sup>26</sup>
iron chromium			122,880			-24
nickel			122,000			124
			30,720	+		-22
			7,680	> :		-20
/23						
Jun21/23			Jan 2/24 (per 1 ml)			-18
Non-ferrous Metal	5		Jan2/24 Jan2/24 0 particles (per 1 ml)		<u>``</u>	-16
			of pa			ice i
copper			la 120			-14
tin			30	-		-12
					1	
			8	<b>Bisrese</b> mal		10
	*************	************************	24	-		-8
21			Jan2/24			
-un (			0	нд бд	14µ 21µ	38µ 71µ
Viscosity @ 40°C				A A!		
Viscosity @ 40°C			0.50	Acid Number		
			〔 <sup>0.50</sup> 影 0.40			
Viscosity @ 40°C			( <sup>в</sup> /Но) 0.40 До 0.40 До 0.30			
Viscosity @ 40°C Abnomal			ල 0.50 පිට 0.40 ළී 0.30 අ 0.20			
Viscosity @ 40°C			(50.50) HO .40 B .30 4 m .20 9 .10			
Viscosity @ 40°C Abnormal Base Abnormal			(0,0.50) Hoy 0.40 June 0.20 Hoy 0.10 Hoy 0.10 Hoy 0.10 Hoy 0.10	Base		
Viscosity @ 40°C Abnomal			(0,0.50 (0,0.40 0.30 400 Minupet Vacial Minupet Vac	Base		

Test Package : IND 2 Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

Unique Number : 10834122

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Diagnosed

Diagnostician

: 19 Jan 2024

: Doug Bogart

Contact/Location: ? ? - NORGAIGA Page 2 of 2

GAINESVILLE, GA

US 30501

Contact:

T:

F: