



OIL ANALYSIS REPORT

Sample Rating Trend


NORMAL



Machine Id
LOGAN BLOCK 4 - SPECIAL METALS-NEWTON NC

Component
Gear Unit

Fluid
TOTAL FINA CARTER EP 220 (--- GAL)

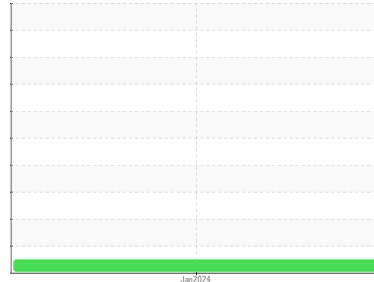

DIAGNOSIS

Recommendation

This is a baseline read-out on the submitted sample.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC06063244	---	---
Sample Date	Client Info			10 Jan 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	483	---	---
Chromium	ppm	ASTM D5185m	>10	7	---	---
Nickel	ppm	ASTM D5185m	>10	3	---	---
Titanium	ppm	ASTM D5185m		4	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	8	---	---
Lead	ppm	ASTM D5185m	>100	8	---	---
Copper	ppm	ASTM D5185m	>50	35	---	---
Tin	ppm	ASTM D5185m	>10	6	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
Cadmium	ppm	ASTM D5185m		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		353	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		5	---	---
Calcium	ppm	ASTM D5185m		92	---	---
Phosphorus	ppm	ASTM D5185m		311	---	---
Zinc	ppm	ASTM D5185m		69	---	---
Sulfur	ppm	ASTM D5185m		8534	---	---




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	26	---	---
Sodium	ppm	ASTM D5185m		326	---	---
Potassium	ppm	ASTM D5185m	>20	9	---	---
Water	%	ASTM D6304	>0.1	NEG	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.47	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	LIGHT	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---







OIL ANALYSIS REPORT

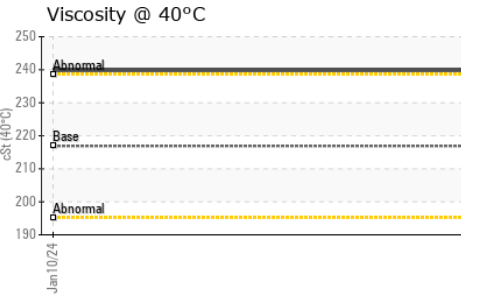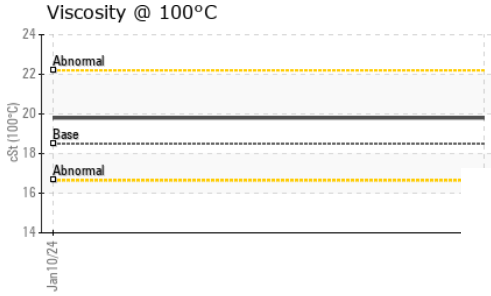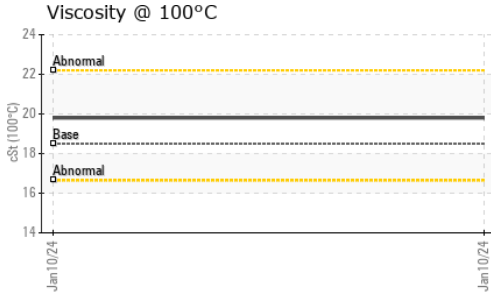

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	216.9	239.8	---	---
Visc @ 100°C	cSt	ASTM D445	18.5	19.8	---	---
Viscosity Index (VI)	Scale	ASTM D2270	95	94	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

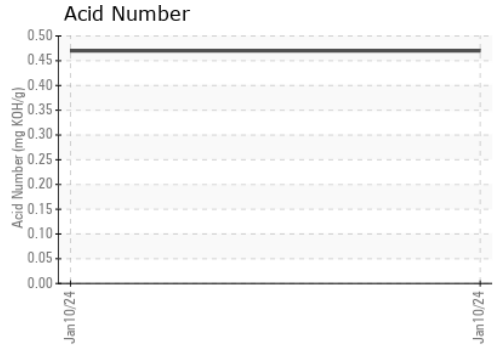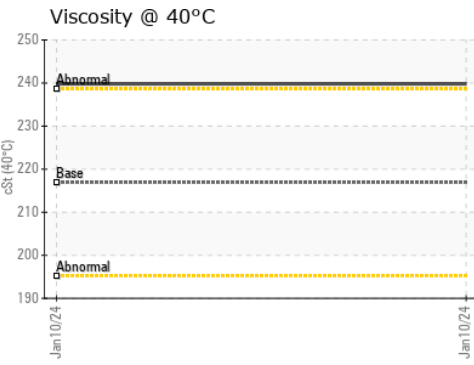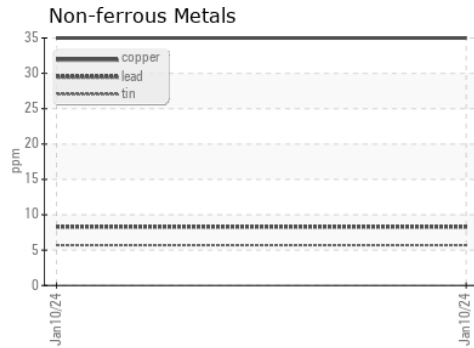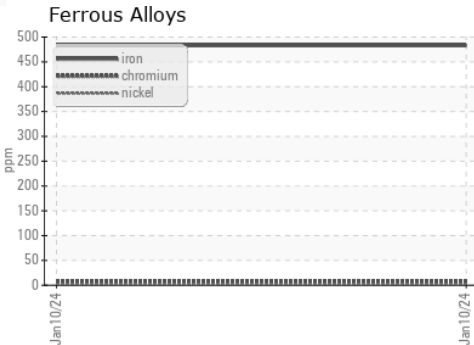

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC06063244 **Recieved** : 17 Jan 2024
Lab Number : 06063244 **Diagnosed** : 22 Jan 2024
Unique Number : 10834626 **Diagnostician** : Doug Bogart
Test Package : IND 2 (Additional Tests: FT-IR, ICP-NewOil, KF, KV100, PrtCount, VI)

QUALITY OIL AND GAS COMPANY
 203 WEST BROAD AVE
 ROCKINGHAM, NC
 US 28379
 Contact: JASON STROLL
 jstroll@qualityoilandgas.com
 T: (910)997-3101
 F: x:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)