



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id  
**JOHN DEERE 748L 1DW748LAOKF694617**  
 Component  
**Hydraulic System**  
 Fluid  
**JOHN DEERE HYDRAU (--- GAL)**

## DIAGNOSIS

### Recommendation

The filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WE0005296</b>	---	---
Sample Date	Client Info		<b>12 Jan 2024</b>	---	---
Machine Age	hrs	Client Info	<b>7520</b>	---	---
Oil Age	hrs	Client Info	<b>7520</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

CONTAMINATION	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	---	---

WEAR METALS	method	limit/base	current	history1	history2
PQ	ASTM D8184		<b>22</b>	---	---
Iron	ppm	ASTM D5185m >20	<b>15</b>	---	---
Chromium	ppm	ASTM D5185m >10	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m >10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >10	<b>2</b>	---	---
Lead	ppm	ASTM D5185m >10	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >75	<b>3</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---





ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>3</b>	---	---
Barium	ppm	ASTM D5185m	<b>3</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>3</b>	---	---
Manganese	ppm	ASTM D5185m	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>22</b>	---	---
Calcium	ppm	ASTM D5185m 87	<b>682</b>	---	---
Phosphorus	ppm	ASTM D5185m 727	<b>615</b>	---	---
Zinc	ppm	ASTM D5185m 900	<b>674</b>	---	---
Sulfur	ppm	ASTM D5185m 1500	<b>2719</b>	---	---

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>2</b>	---	---
Sodium	ppm	ASTM D5185m	<b>0</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	---	---

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>▲ 29353</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>▲ 2630</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>105</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>19</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>0</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 22/19/14</b>	---	---



# OIL ANALYSIS REPORT

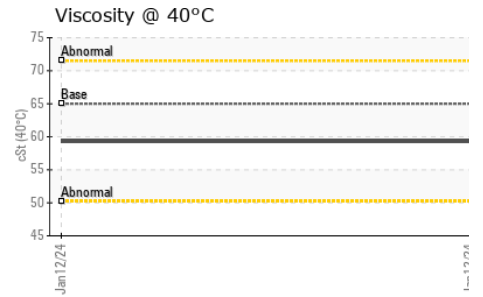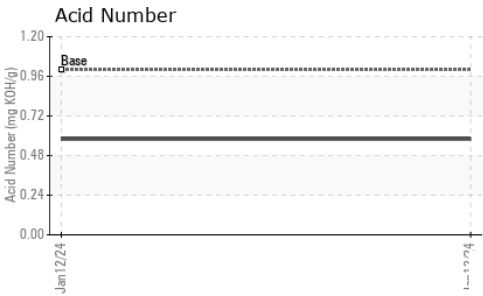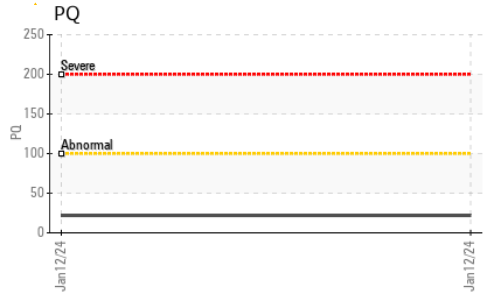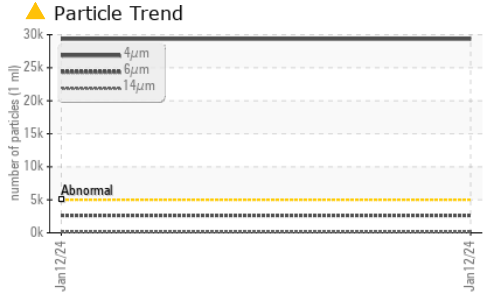

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	<b>0.58</b>	---	---





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 65	<b>59.3</b>	---	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

### GRAPHS

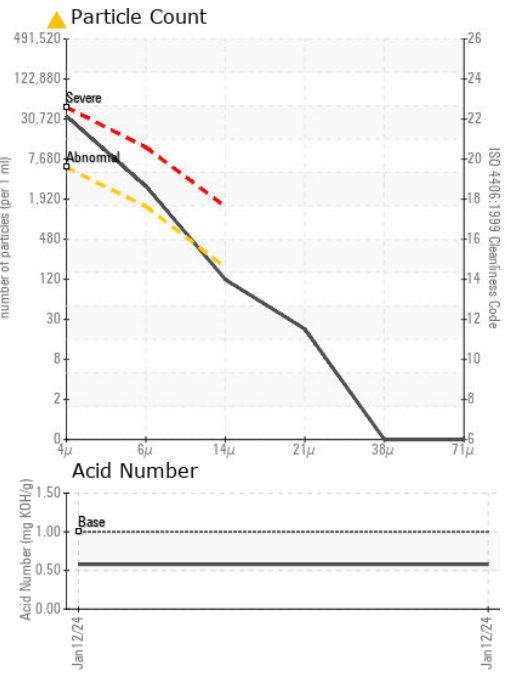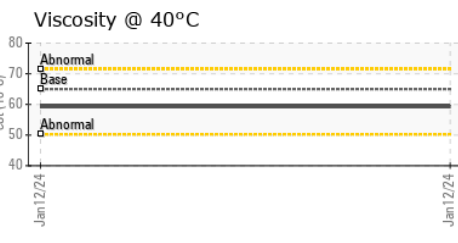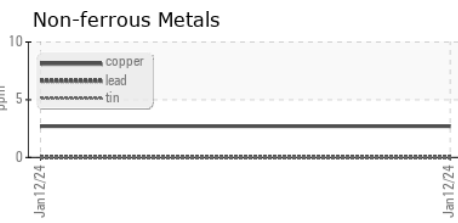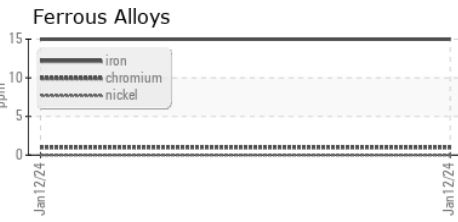

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WE0005296 **Received** : 17 Jan 2024  
**Lab Number** : 06063520 **Tested** : 19 Jan 2024  
**Unique Number** : 10834902 **Diagnosed** : 19 Jan 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**WARRIOR TRACTOR AND EQUIPMENT - MONROEVILLE**  
 66 INDUSTRIAL PARK DR  
 MONROEVILLE, AL  
 US 36460  
 Contact: SCOTT WILLIAMSON  
 swilliamson@warriortractor.com  
 T: (251)575-7111  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)