




# OIL ANALYSIS REPORT

Sample Rating Trend

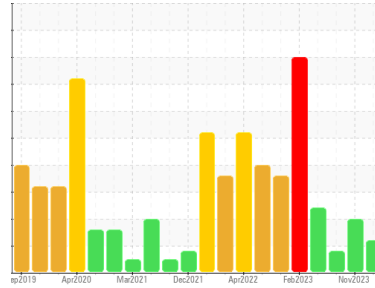

ISO



Area  
**WH-100**  
Machine Id  
**B25970 - STORK GEARBOX #10 (DISCHARGE)**  
Component  
**Gearbox**  
Fluid  
**PETRO CANADA ENDURATEX WG 680 (--- GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0880593</b>	WC0856023	WC0826082
Sample Date	Client Info	<b>10 Jan 2024</b>	29 Nov 2023	25 Jul 2023
Machine Age	hrs	<b>0</b>	0	0
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >200	<b>8</b>	7	66
Chromium	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	0	0
Lead	ppm	ASTM D5185m >100	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >200	<b>4</b>	3	10
Tin	ppm	ASTM D5185m >25	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 1	<b>0</b>	0	0
Barium	ppm	ASTM D5185m 1	<b>3</b>	0	0
Molybdenum	ppm	ASTM D5185m 1	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m 1	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1	<b>0</b>	0	0
Calcium	ppm	ASTM D5185m 1	<b>&lt;1</b>	<1	0
Phosphorus	ppm	ASTM D5185m 1	<b>45</b>	<1	0
Zinc	ppm	ASTM D5185m 1	<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m 3114	<b>3134</b>	2471	3470

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >50	<b>1</b>	4	5
Sodium	ppm	ASTM D5185m	<b>0</b>	1	<1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	<1
Water	%	ASTM D6304 >0.2	<b>0.032</b>	▲ 0.472	---
ppm Water	ppm	ASTM D6304 >2000	<b>320</b>	▲ 4720	---

## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	▲ <b>48218</b>	---	---
Particles >6µm	ASTM D7647 >2500	▲ <b>8832</b>	---	---
Particles >14µm	ASTM D7647 >320	<b>275</b>	---	---
Particles >21µm	ASTM D7647 >80	<b>43</b>	---	---
Particles >38µm	ASTM D7647 >20	<b>1</b>	---	---
Particles >71µm	ASTM D7647 >4	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c) >20/18/15	▲ <b>23/20/15</b>	---	---


## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.43	<b>0.75</b>	0.51	0.72




# OIL ANALYSIS REPORT

## Particle Trend

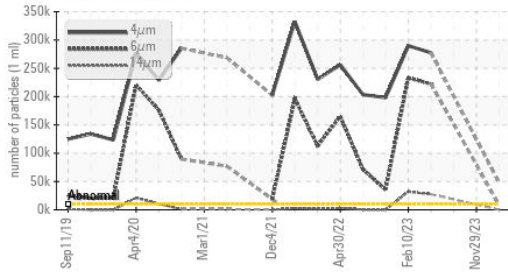


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	▲ MODER
Debris	scalar	*Visual	NONE	▲ HEAVY	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	0.2%	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

## Water (KF)

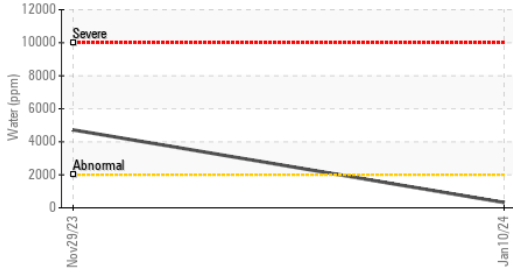


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	676.7	672	721

## SAMPLE IMAGES

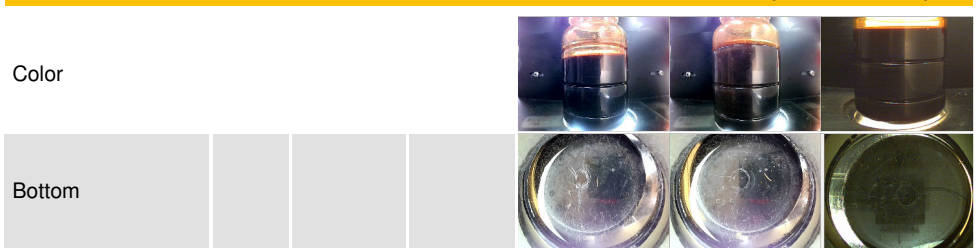


## Acid Number

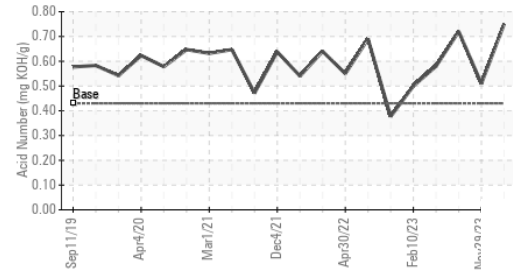


## GRAPHS


### Ferrous Alloys

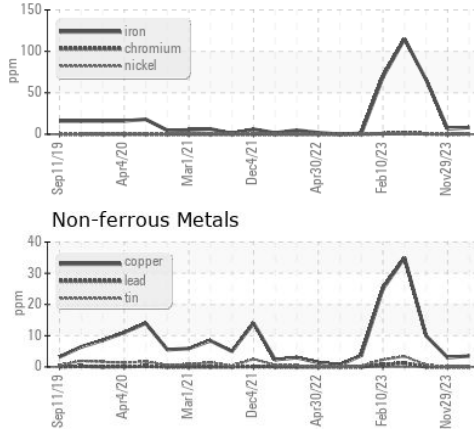


### Non-ferrous Metals

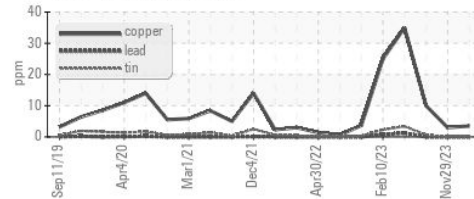


### Viscosity @ 40°C

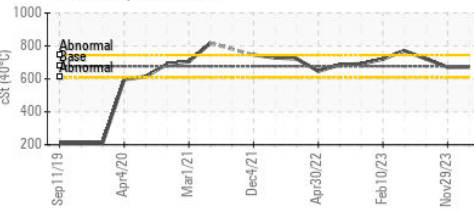


### Particle Count

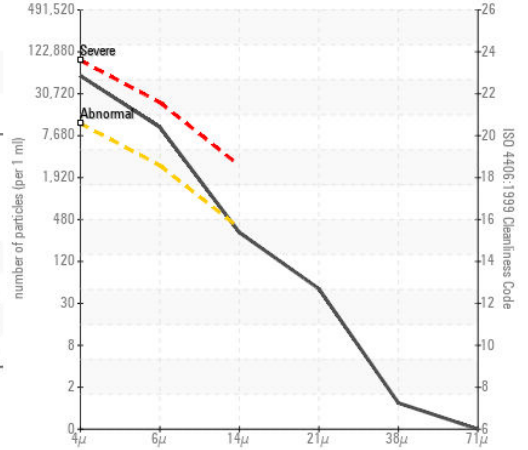


### Acid Number

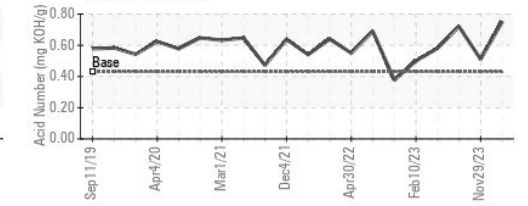

## Water (KF)

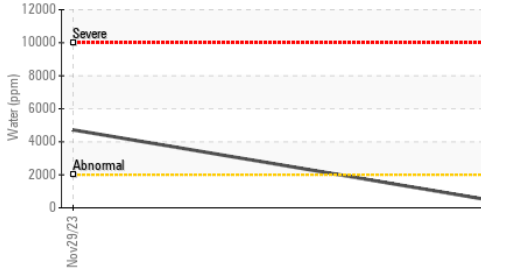

## Viscosity @ 40°C

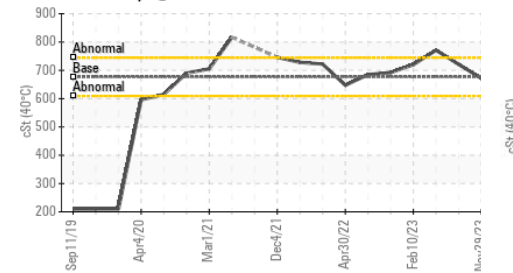

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0880593 Recieved : 17 Jan 2024  
 Lab Number : 06063562 Diagnosed : 25 Jan 2024  
 Unique Number : 10834944 Diagnostician : Wes Davis  
 Test Package : IND 2 ( Additional Tests: KF, PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**HORMEL FOODS - AUSTIN**  
 1101 NORTH MAIN ST  
 AUSTIN, MN  
 US 55912  
 Contact: RYAN LOWE  
 rslowe@hormel.com  
 T: (507)437-5674  
 F: (507)437-9805