

## **OIL ANALYSIS REPORT**

Sample Rating Trend

**WATER** 



# KAESER ESD 250 6068720 (S/N 1241)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

**DIAGNOSIS** 

### Recommendation

We recommend you service the filters on this component. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil. There is a light concentration of water present in the oil.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFOR Sample Number Sample Date	MATION			Jan2024		
		method	limit/base	current	history1	history2
Sample Date		Client Info		KCPA003746		
		Client Info		08 Jan 2024		
Machine Age	hrs	Client Info		49774		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	18		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	2		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	3		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m	7.0	0		
Cadmium	ppm	ASTM D5185m		0		
	ррпп		Uses It /lease as			
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	3		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	90	2		
Calcium	ppm	ASTM D5185m	2	1		
Phosphorus	ppm	ASTM D5185m		461		
Zinc	ppm	ASTM D5185m		0		
<b>L</b> II10						
	ppm	ASTM D5185m		4023		
		ASTM D5185m method	limit/base			
Sulfur  CONTAMINANTS						
Sulfur  CONTAMINANTS Silicon	3	method		current		history2
Sulfur  CONTAMINANTS Silicon Sodium	S ppm	method ASTM D5185m	>25	current 0	history1	history2
Sulfur  CONTAMINANTS Silicon Sodium Potassium	ppm ppm	method ASTM D5185m ASTM D5185m	>25 >20	current 0 0	history1	history2
Sulfur  CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm	method  ASTM D5185m  ASTM D5185m  ASTM D5185m	>25 >20 >0.05	current 0 0 <	history1	history2
Sulfur  CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>25 >20 >0.05	current  0 0 <-1  △ 0.073	history1	history2
Sulfur  CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLII	ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>25 >20 >0.05 >500	current  0  0  <1  △ 0.073  ▲ 730	 history1   	history2
Sulfur  CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLII Particles >4µm	ppm ppm ppm ppm	method  ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>25 >20 >0.05 >500 limit/base	current  0 0 <1 ▲ 0.073 ▲ 730  current	history1 history1	history2
Sulfur  CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLII Particles >4µm Particles >6µm	ppm ppm ppm ppm	method  ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>25 >20 >0.05 >500 limit/base	current  0 0 <1 △ 0.073 △ 730  current  1592	history1 history1	history2
Sulfur  CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLII Particles >4µm Particles >14µm Particles >14µm	ppm ppm ppm ppm	method  ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method  ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80	current  0  0  <1  △ 0.073  △ 730  current  1592  867	history1 history1 history1	history2
Sulfur  CONTAMINANTS Silicon Sodium Potassium Water ppm Water  FLUID CLEANLII Particles >4µm Particles >14µm Particles >21µm Particles >21µm	ppm ppm ppm ppm	method  ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304  method  ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80	current  0  0  <1  △ 0.073  △ 730  current  1592  867  △ 148	history1 history1	history2
Sulfur  CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLII Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm ppm	method  ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304  Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20	Current  0  0  <1  △ 0.073  △ 730  Current  1592  867  △ 148  △ 50	history1 history1 history1	history2
Sulfur  CONTAMINANTS Silicon Sodium Potassium Water ppm Water  FLUID CLEANLII Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm ppm ppm	method  ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304  Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	current  0 0 0 <1 △ 0.073 △ 730  current  1592 867 △ 148 △ 50 △ 8	history1 history1	history2
Sulfur  CONTAMINANTS Silicon Sodium Potassium Water ppm Water	ppm ppm ppm % ppm	method  ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304  Method  ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	current  0 0 <1 △ 0.073 △ 730  current  1592 867 △ 148 △ 50 △ 8 1	history1 history1	history2



# **OIL ANALYSIS REPORT**

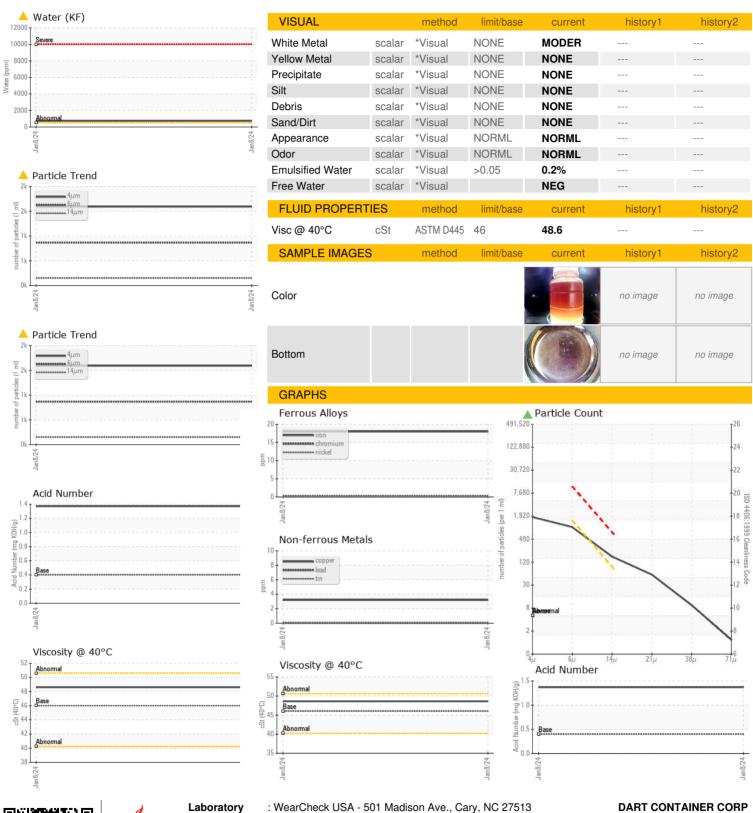





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number** 

: 06063582

: KCPA003746 : 10834964

Recieved Diagnosed

: 17 Jan 2024 : 25 Jan 2024

Diagnostician : Jonathan Hester

Test Package : IND 2 ( Additional Tests: KF, PrtCount ) To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

3219 WESLEYAN RD RANDLEMAN, NC US 27317

Contact: SERVICE MANAGER

T:

F: