


OIL ANALYSIS REPORT





Machine Id **1420915 (S/N 01814715)** Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA009947	KCP43897	
Sample Date		Client Info		21 Dec 2023	14 Dec 2021	
Machine Age	hrs	Client Info		51140	50925	
Oil Age	hrs	Client Info		0	2000	
Oil Changed		Client Info		N/A	Changed	
Sample Status				ABNORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	1	<1	
Chromium	ppm	ASTM D5185m	>10	<1	0	
Nickel	ppm	ASTM D5185m	>3	0	<1	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	<1	
Aluminum	ppm	ASTM D5185m	>10	2	0	
Lead		ASTM D5185m	>10	0	<1	
	ppm		>50	8	16	
Copper	ppm	ASTM D5185m		-		
Tin	ppm	ASTM D5185m	>10	0	0	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	1	
Barium	ppm	ASTM D5185m	90	16	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m	100	39	0	
Calcium	ppm	ASTM D5185m	0	1	0	
Phosphorus	ppm	ASTM D5185m	0	45	1	
Zinc	ppm	ASTM D5185m	0	0	0	
Sulfur	ppm	ASTM D5185m	23500	21885	17809	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	1	
Sodium	ppm	ASTM D5185m	220	0	0	
Potassium	ppm	ASTM D5185m	>20	2	<1	
Water	%			0.014		
ppm Water	ppm	ASTM D0304 ASTM D6304		141		
FLUID CLEANLINI		method	limit/base	current	history1	history2
			IIIIII/Dase			
Particles >4µm		ASTM D7647	. 1200	45379	3945	
Particles >6µm		ASTM D7647		▲ 10608	1094	
Particles >14µm		ASTM D7647		▲ 424	71	
Particles >21µm		ASTM D7647		<mark>▲</mark> 71	15	
Particles >38µm		ASTM D7647	>4	1	0	
Particles >71µm		ASTM D7647		0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u> </u>	17/13	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.41	0.369	
i:22:23) Rev: 1					ocation: KATE ?	


Report Id: ACCSANCAL [WUSCAR] 06063584 (Generated: 01/19/2024 15:22:23) Rev: 1


Contact/Location: KATE ? - ACCSANCAL




Built for a lifetime.

OIL ANALYSIS REPORT






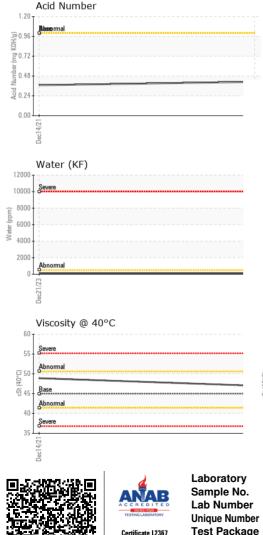

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	LIGHT	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	
Free Water	scalar	*Visual		NEG	NEG	
FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	47.0	48.9	
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color				•		no image
Bottom					(\bigcirc)	no image
GRAPHS						
Ferrous Alloys				Particle Count	t	
8 iron			491,520	[T ²⁶
And			122,880			-24
6 - management nickel						

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

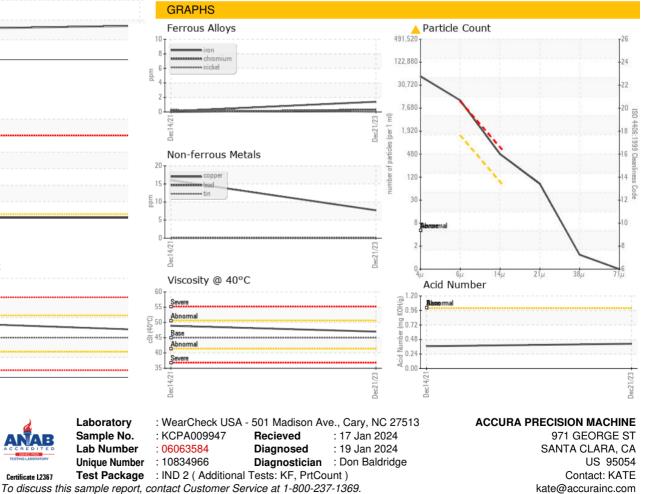

T:

F: