

OIL ANALYSIS REPORT

Area MELT SHOP - BAGHOUSE FANS Machine Id MELTSHOP BAGHOUSE FANS 141A B/S Component

Bearing Fluid

MOBIL SHC 627 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

The water content is negligible. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.







NORMAL


| SAMPLE INFORM | 1ATION | method | limit/base | current | history1 | history2 |
|------------------|----------|-------------|------------|-------------|-------------|-------------|
| Sample Number | | Client Info | | RP0039109 | RP0038627 | RP0035018 |
| Sample Date | | Client Info | | 16 Jan 2024 | 27 Oct 2023 | 17 Jul 2023 |
| Machine Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| PQ | | ASTM D8184 | | 16 | 20 | 16 |
| Iron | ppm | ASTM D5185m | >20 | 4 | 5 | 4 |
| Chromium | ppm | ASTM D5185m | >20 | <1 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >20 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 2 | 1 | <1 |
| Lead | ppm | ASTM D5185m | >20 | 0 | <1 | 0 |
| Copper | ppm | ASTM D5185m | >20 | <1 | 0 | <1 |
| Tin | ppm | ASTM D5185m | >20 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | <1 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | | 3 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 0 | 3 | <1 |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | | 0 | <1 | <1 |
| Calcium | ppm | ASTM D5185m | | 8 | 7 | 7 |
| Phosphorus | ppm | ASTM D5185m | | 446 | 445 | 417 |
| Zinc | ppm | ASTM D5185m | | 0 | 17 | 18 |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >15 | 15 | 15 | 8 |
| Sodium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Potassium | ppm | ASTM D5185m | >20 | <1 | 1 | <1 |
| Water | % | ASTM D6304 | >2 | 0.003 | 0.003 | 0.002 |
| ppm Water | ppm | ASTM D6304 | | 28 | 37.0 | 15.8 |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.27 | 0.26 | 0.33 |




OIL ANALYSIS REPORT

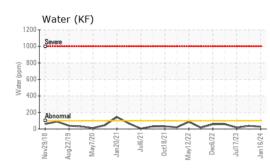

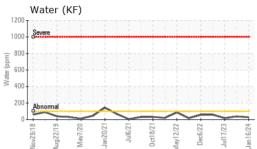


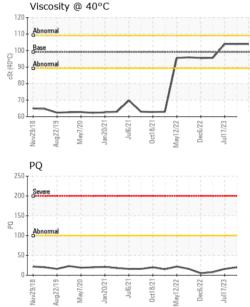

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|-----------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | LIGHT | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >2 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |
| FLUID PROPERT | IES | method | limit/base | current | history1 | history2 |
| Visc @ 40°C | cSt | ASTM D445 | 99.1 | 104 | 104 | 104 |
| SAMPLE IMAGES | 5 | method | limit/base | current | history1 | history2 |
| Color | | | | | a. 000 | |



Bottom

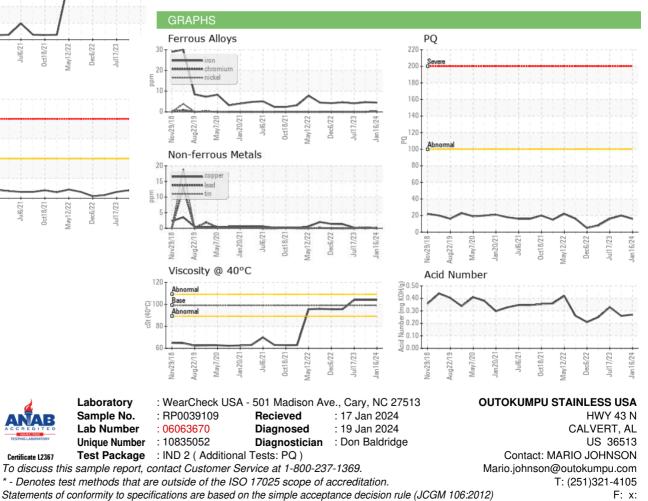

Submitted By: DALE ROBINSON

Page 2 of 2