

# **OIL ANALYSIS REPORT**

## Sample Rating Trend

# **NORMAL**

# MELT SHOP - BAGHOUSE FANS M/S BAGHOUSE FAN 711B F/S (S/N ET711-3315B-A001)

**Outboard Gearbox** 

{not provided} (--- GAL)

# DIAGNOSIS

### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Sample Number		Client Info		RP0039312	RP0038555	RP0035543
Sample Date		Client Info		16 Jan 2024	27 Oct 2023	17 Jul 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		23	23	17
Iron	ppm	ASTM D5185m	>200	9	11	10
Chromium	ppm	ASTM D5185m	>15	<1	<1	0
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	1	<1
Lead	ppm	ASTM D5185m	>100	0	<1	0
Copper	ppm	ASTM D5185m	>200	0	<1	<1
Tin	ppm	ASTM D5185m	>25	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		3	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	<1	<1
Calcium	ppm	ASTM D5185m		48	29	32
Phosphorus	ppm	ASTM D5185m		377	348	332
Zinc	ppm	ASTM D5185m		427	410	412
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	2	2	2
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	<1	1	<1
Water	%	ASTM D6304	>0.2	0.003	0.004	0.003
ppm Water	ppm	ASTM D6304	>2000	35	47.3	27.0
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

0.39

0.33


Acid Number (AN)

mg KOH/g ASTM D8045

0.42



# **OIL ANALYSIS REPORT**

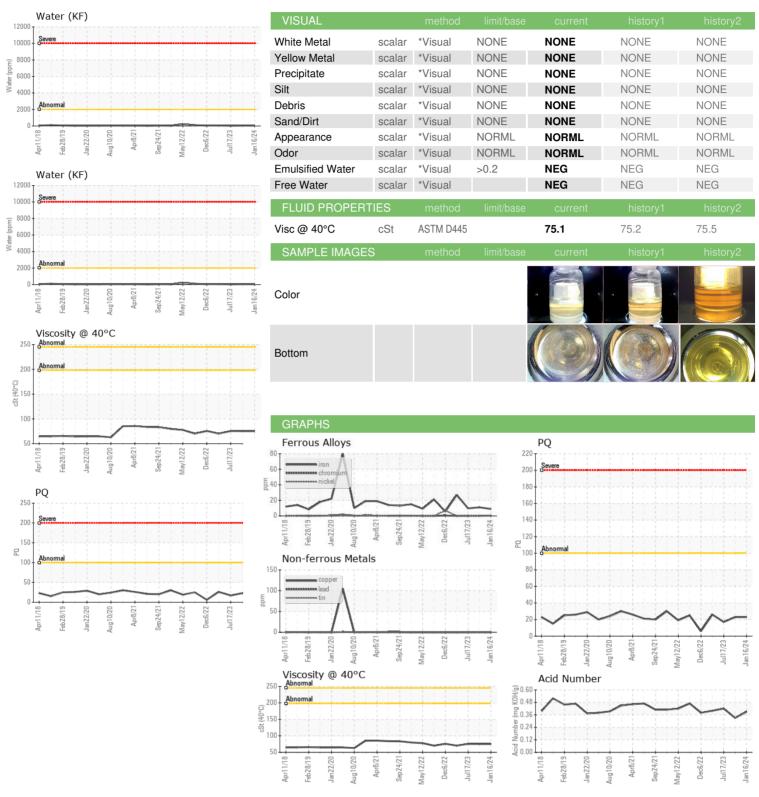





Laboratory Sample No. Lab Number **Unique Number** 

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

: RP0039312 : 06063679 : 10835061

Diagnostician Test Package : IND 2 (Additional Tests: PQ)

Recieved

Diagnosed

: 17 Jan 2024

: 19 Jan 2024

: Wes Davis

Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**OUTOKUMPU STAINLESS USA** 

HWY 43 N CALVERT, AL US 36513

Contact: MARIO JOHNSON Mario.johnson@outokumpu.com

T: (251)321-4105 F: x: