




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

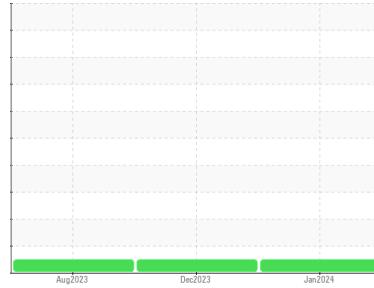

Area  
**Bernardsville**  
 Machine Id  
**PETERBILT 6627**

Component  
**Diesel Engine**  
 Fluid  
**GIBRALTAR 15W/40 SUPER S-3 LX (11)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0875344</b>	WC0875324	WC0831066
Sample Date	Client Info			<b>10 Jan 2024</b>	02 Dec 2023	10 Aug 2023
Machine Age	hrs	Client Info		<b>14076</b>	13805	13202
Oil Age	hrs	Client Info		<b>0</b>	0	13202
Oil Changed	Client Info			<b>Not Chngd</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>110	<b>7</b>	17	11
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>1</b>	2	3
Lead	ppm	ASTM D5185m	>45	<b>0</b>	2	<1
Copper	ppm	ASTM D5185m	>85	<b>4</b>	17	2
Tin	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>6</b>	8	8
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	66	<b>58</b>	64	65
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1000	<b>896</b>	952	853
Calcium	ppm	ASTM D5185m	1050	<b>1236</b>	1308	1300
Phosphorus	ppm	ASTM D5185m	1150	<b>1073</b>	1109	987
Zinc	ppm	ASTM D5185m	1270	<b>1273</b>	1365	1241
Sulfur	ppm	ASTM D5185m		<b>3578</b>	3277	3590



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>4</b>	6	4
Sodium	ppm	ASTM D5185m		<b>2</b>	<1	1
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	4	5

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.8</b>	9.1	8.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.8</b>	20.0	19.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.0</b>	16.1	14.5
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>9.57</b>	8.76	7.6











# OIL ANALYSIS REPORT

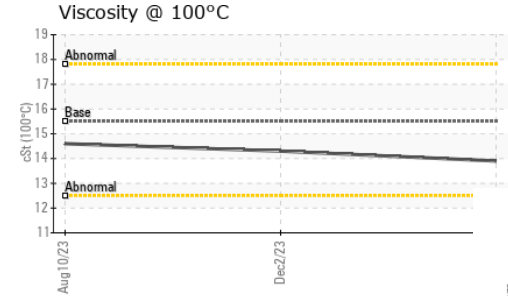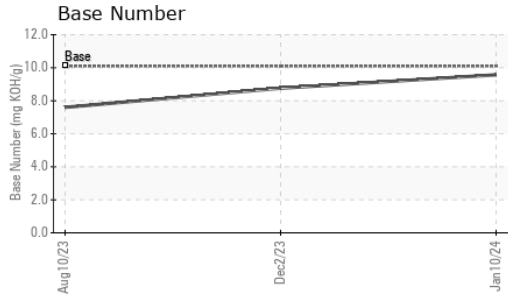

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.5	<b>13.9</b>	14.3	14.6

### GRAPHS

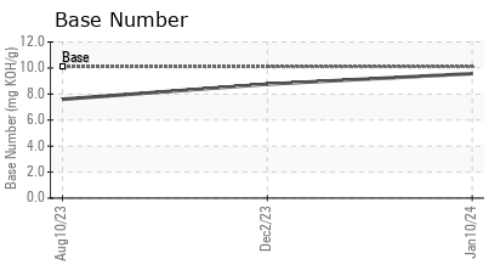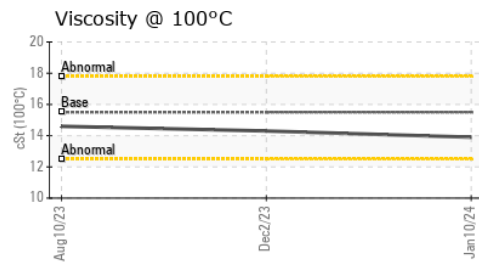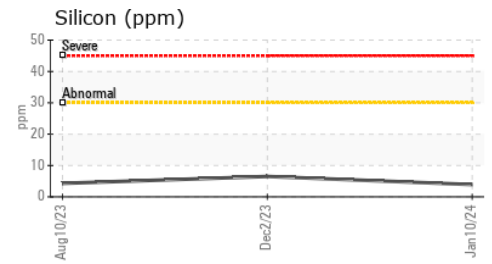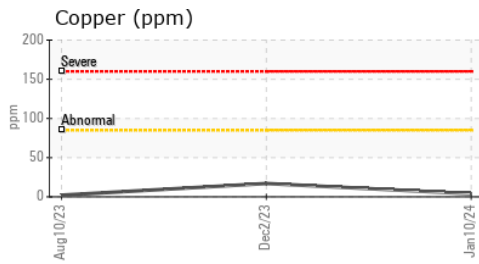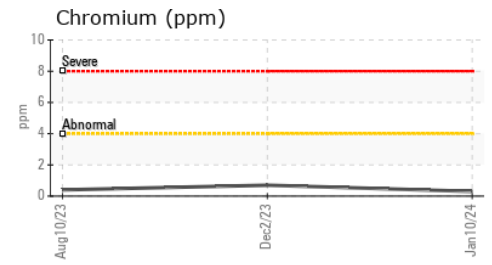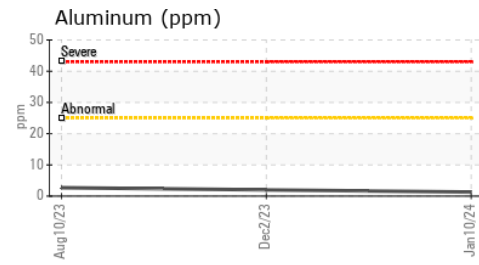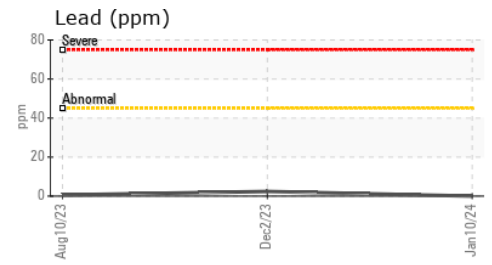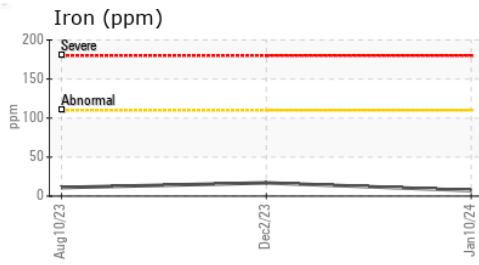

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0875344 **Received** : 17 Jan 2024  
**Lab Number** : 06063793 **Diagnosed** : 19 Jan 2024  
**Unique Number** : 10835175 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**INTERSTATE WASTE-BERNARDSVILLE**  
 33 OLD QUARRY ROAD  
 BERNARDSVILLE, NJ  
 US 07924  
 Contact: Pablo Chardon  
 PChardon@interstatewaste.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)