



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
5064
 Component
2 Differential
 Fluid
GEAR OIL SAE 80W90 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0847893	---	---
Sample Date	Client Info		24 Nov 2023	---	---
Machine Age	hrs	Client Info	4245	---	---
Oil Age	hrs	Client Info	2365	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >1200	144	---	---
Chromium	ppm	ASTM D5185m >8	<1	---	---
Nickel	ppm	ASTM D5185m >20	8	---	---
Titanium	ppm	ASTM D5185m >4	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >30	0	---	---
Lead	ppm	ASTM D5185m >25	0	---	---
Copper	ppm	ASTM D5185m >50	2	---	---
Tin	ppm	ASTM D5185m >5	0	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	264	---	---
Barium	ppm	ASTM D5185m 200	0	---	---
Molybdenum	ppm	ASTM D5185m 12	0	---	---
Manganese	ppm	ASTM D5185m	3	---	---
Magnesium	ppm	ASTM D5185m 12	1	---	---
Calcium	ppm	ASTM D5185m 150	13	---	---
Phosphorus	ppm	ASTM D5185m 1650	1102	---	---
Zinc	ppm	ASTM D5185m 125	5	---	---
Sulfur	ppm	ASTM D5185m 22500	23750	---	---

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >230	191	---	---
Sodium	ppm	ASTM D5185m >170	5	---	---
Potassium	ppm	ASTM D5185m >20	3	---	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	---	---
Yellow Metal	scalar	*Visual NONE	NONE	---	---
Precipitate	scalar	*Visual NONE	NONE	---	---
Silt	scalar	*Visual NONE	NONE	---	---
Debris	scalar	*Visual NONE	NONE	---	---
Sand/Dirt	scalar	*Visual NONE	NONE	---	---
Appearance	scalar	*Visual NORML	NORML	---	---
Odor	scalar	*Visual NORML	NORML	---	---
Emulsified Water	scalar	*Visual >.2	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---



OIL ANALYSIS REPORT

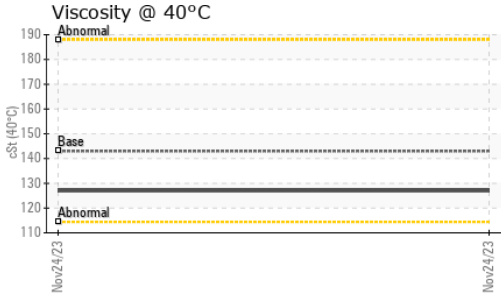




FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445 143	127	---	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

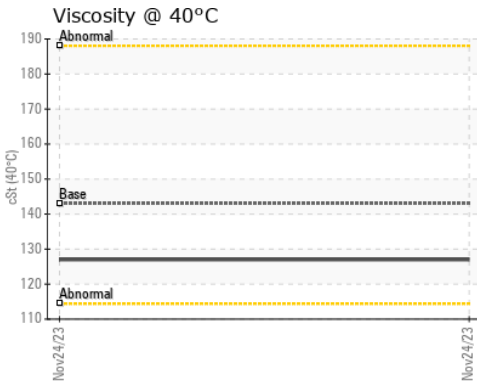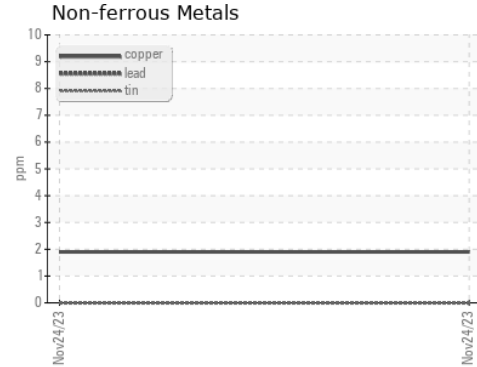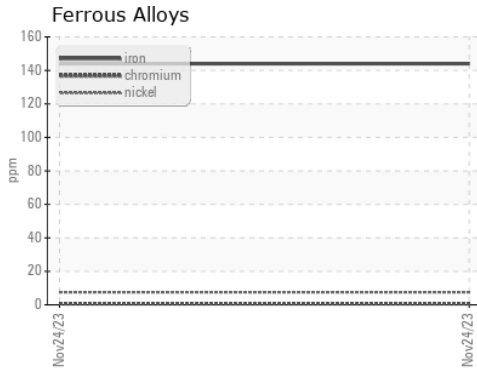

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0847893 **Recieved** : 17 Jan 2024
Lab Number : **06063926** **Diagnosed** : 18 Jan 2024
Unique Number : 10835308 **Diagnostician** : Wes Davis
Test Package : CONST

Apple Valley Waste - Chambersburg Location
 5436 Sunset Pike
 Chambersburg, PA
 US 17202
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: