




OIL ANALYSIS REPORT

Sample Rating Trend

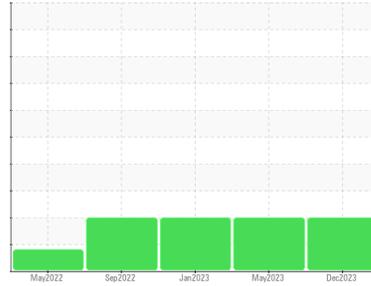

GLYCOL



Machine Id
9906

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high. There is an abnormal amount of solids and carbon present in the oil. Test for glycol is negative.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0844970	WC0810346	WC0766336
Sample Date	Client Info		29 Dec 2023	11 May 2023	16 Jan 2023
Machine Age	mls	Client Info	362643	357095	351644
Oil Age	mls	Client Info	6000	0	6000
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	25	18	20
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >4	0	0	<1
Titanium	ppm	ASTM D5185m	0	<1	1
Silver	ppm	ASTM D5185m >3	0	0	<1
Aluminum	ppm	ASTM D5185m >20	2	3	3
Lead	ppm	ASTM D5185m >40	2	2	3
Copper	ppm	ASTM D5185m >330	4	2	3
Tin	ppm	ASTM D5185m >15	0	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	17	10	24
Barium	ppm	ASTM D5185m 10	3	0	0
Molybdenum	ppm	ASTM D5185m 100	89	75	82
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m 450	314	332	154
Calcium	ppm	ASTM D5185m 3000	1831	1921	2170
Phosphorus	ppm	ASTM D5185m 1150	973	1051	976
Zinc	ppm	ASTM D5185m 1350	1247	1275	1271
Sulfur	ppm	ASTM D5185m 4250	3606	3824	4009

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	11	7	9
Sodium	ppm	ASTM D5185m >158	▲ 183	▲ 110	▲ 105
Potassium	ppm	ASTM D5185m >20	23	10	9
Glycol	%	*ASTM D2982	NEG	NEG	NEG

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	▲ 4.3	▲ 4	▲ 3.4
Nitration	Abs/cm	*ASTM D7624 >20	16.4	12.9	13.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	30.8	29.0	27.0

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	25.5	18.1	18.1
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	0.0	4.4	7.4







OIL ANALYSIS REPORT

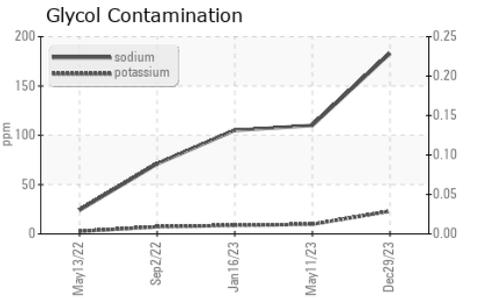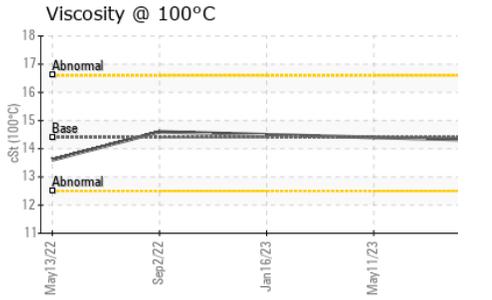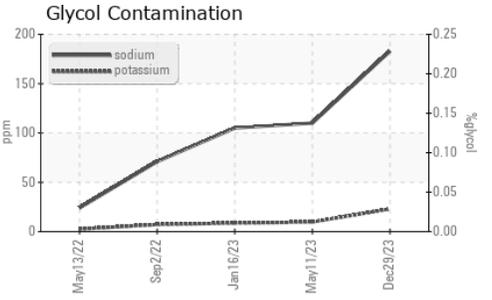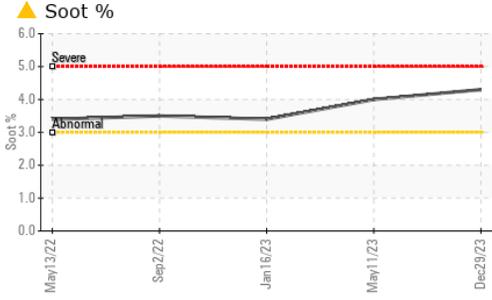

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	14.3	14.4

GRAPHS

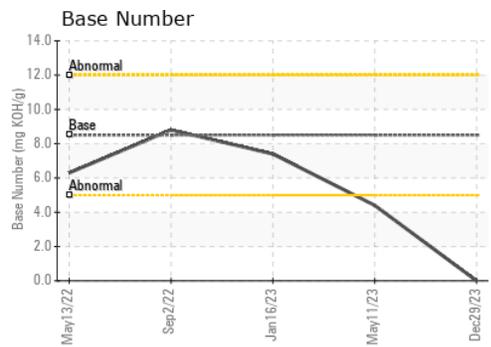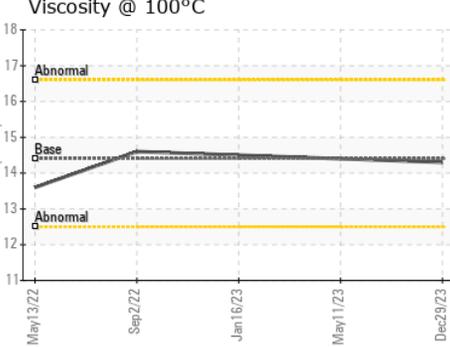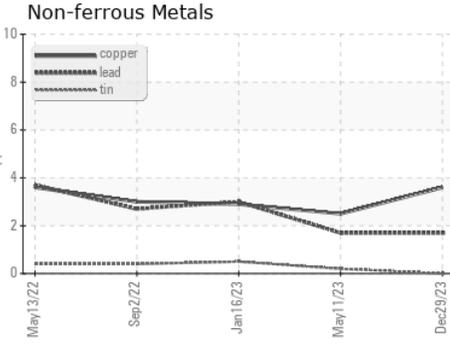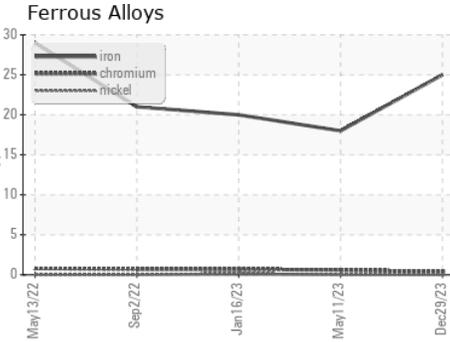

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0844970 **Received** : 18 Jan 2024
Lab Number : 06064113 **Diagnosed** : 22 Jan 2024
Unique Number : 10835495 **Diagnostician** : Doug Bogart
Test Package : FLEET (Additional Tests: Glycol)

TOWN OF CHAPEL HILL
 6900 MILLHOUSE RD
 CHAPEL HILL, NC
 US 27516
 Contact: Lisa DePasqua
 ldepasqua@townofchapelhill.org
 T: (919)696-4941
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)